

ARINC 801 Technology

High Speed Fiber Optics Single and Multimode



ARINC 801 Technology

High Speed Fiber Optics Single and Multimode



Single terminus design for all connector formats

The ARINC 801 fiber optic terminus is the next generation of butt-joint interconnect technology allowing for higher density multichannel connectors to be achieved.

With its standard 1.25 mm ferrule and sleeve, the ARINC 801 terminus is designed for both multimode and singlemode applications and is compatible with standard LC termination processes. The terminus is available both as a pull-proof design and a general use design for tight jacketed cable.

For the pull-proof design, the cable jacket is crimped on an external body and a floating mechanism avoids any loss of performance when pulling on the cable. This feature allows for the use of the connector without a backshell.

Features & Benefits


- **Low loss, low back reflection**
 - Return loss -50 dB singlemode
 - Low insertion loss 0.3 dB max mated pair
- **General use design (no strain relief backshell needed)**
- **Optical disconnect style available**
- **PC, UPC or APC ferrule endface**
- **Genderless design (same contact on both sides of the connector)**
- **Compatible with multimode and singlemode fiber**
- **Standard 1.25 mm ferrule and sleeve**
- **Cable termination identical to LC connector process**
- **Easy cleaning access to the contact through removable alignment sleeve retainer**
- **Standard MIL-DTL-38999 and ARINC 600 Size 16 insertion/removal tool**

Size 16 ARINC 801 Terminus


Contacts and Insert Arrangements

Size 16 ARINC 801 Contact


Part Number	Mode	Style	Polish
238500-8000	Multi	Pull Proof Loose Jacket	PC
238500-8001	Multi	Tight Jacket	PC
238500-8002	Single	Pull Proof Loose Jacket	PC
238500-8003	Single	Pull Proof Loose Jacket	APC
238500-8004	Single	Tight Jacket	PC
238500-8005	Single	Tight Jacket	APC

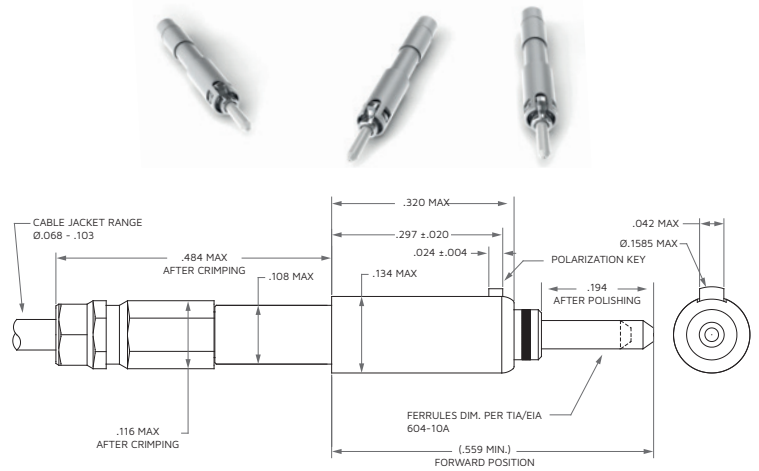


ARINC 600 Insert Arrangements

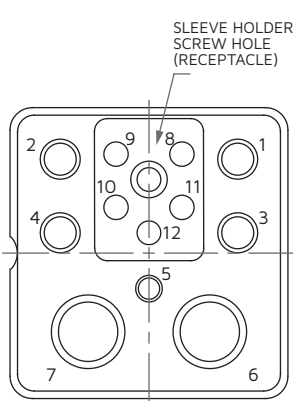


12F5C2

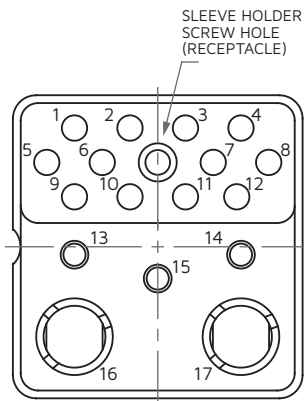

17F12Q2

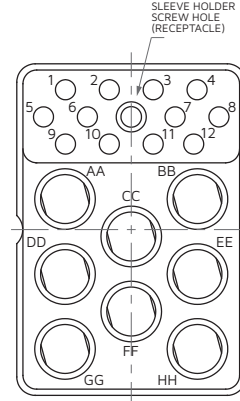

20F12T8/20F12Q8

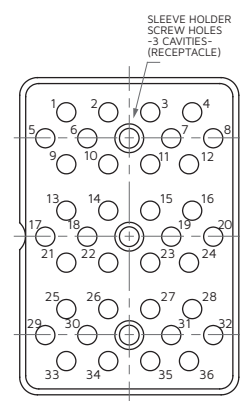

36F36

QTY	Size	Contact	Cavity ID
4	12	Electrical	1 to 4
1	16	Electrical	5
2	5	Quadrax	6 to 7
5	16	Optical Termini	8 to 12

QTY	Size	Contact	Cavity ID
12	16	Optical Termini	1 to 12
3	16	Electrical	13 to 15
2	8	Quadrax	16 to 17

QTY	Size	Contact	Cavity ID
12	16	Optical Termini	1 to 12
8	8	Twinax/Quadrax	AA to HH



QTY	Size	Contact	Cavity ID
36	16	Optical Termini	1 to 36

Connector Shells

Specifications & Dimensions

ARINC 600 Shell Size 2

Please contact Sales and consult our "High Speed Rack & Panel Connectors" catalog for availability and ordering information.

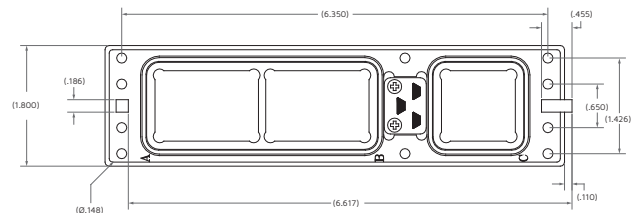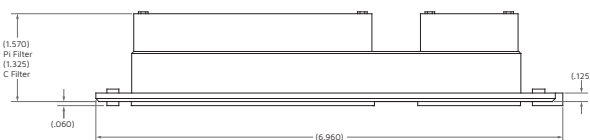

Worldwide Support

Connectors

Americas

Sales

connectors.uscsr@smithsinterconnect.com

Technical Support

connectors.ustechsupport@smithsinterconnect.com

Europe

Sales

connectors.emeacsr@smithsinterconnect.com

Technical Support

connectors.emeatechsupport@smithsinterconnect.com

Asia

Sales

asiacsr@smithsinterconnect.com

Technical Support

asiatechsupport@smithsinterconnect.com

Fibre Optics & RF Components

Americas

Sales

focom.uscsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Europe

Sales

focom.emeacsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Asia

Sales

focom.asiacsr@smithsinterconnect.com

Technical Support

focom.techsupport@smithsinterconnect.com

Semiconductor Test

Americas

Sales

semi.uscsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

Europe

Sales

semi.emeacsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

Asia

Sales

semi.asiacsr@smithsinterconnect.com

Technical Support

semi.techsupport@smithsinterconnect.com

RF/MW Subsystems

Americas, Europe & Asia

Sales

subsystems.csr@smithsinterconnect.com

Technical Support

subsystems.techsupport@smithsinterconnect.com

Connecting Global Markets

more > [smithsinterconnect.com](https://www.smithsinterconnect.com)

