
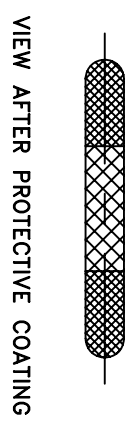


NOTES

- *1. REFER TO F.O. FOR RESISTANCE VALUE AND TOLERANCE
- 2. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: ± .010 [.254mm].
- 3. DIMENSIONS APPLY AFTER TINNING

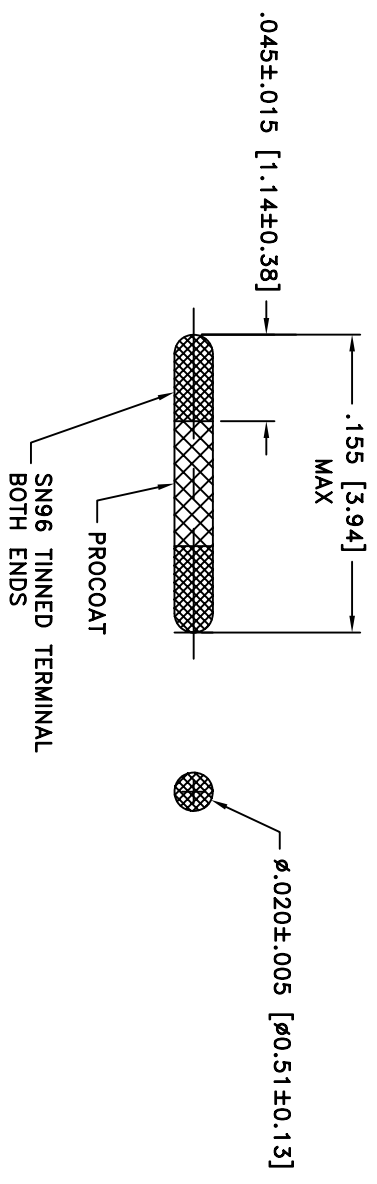

MATERIALS:
 SUBSTRATE: ALUMINA
 FINISH:
 TERMINAL: SOLDER TINNED SN96
ELECTRICAL:
 AVERAGE POWER: .05 WATT MAX.
 DC RESISTANCE: 5 OHMS – 300 OHMS
 OPERATING TEMPERATURE: –55°C TO +150°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EMC TECHNOLOGY AND FLORIDA RF LABS AND SHALL NOT BE DUPLICATED OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF PARTS OR DEVICES WITHOUT PERMISSION.

CAGE CODE	24602	CAGE CODE	2Y194
8851 SW OLD KANSAS AVE			
VENDOR CODE N/A			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES		TITLE	
FRACT	ANG	RESISTOR, ROD, ASSEMBLY	
.XX	---	DRAWN BY JG	
.XXX	±.010	CHECKED BY	
.XXXX	±.0020	ASST REF	
FOOT SCALE N/A		APPROVED BY	
REVISION		DRAWING NUMBER R020-125A-*	
CHANGE DESCRIPTION		SHEET 1 OF 1	
PRELIMINARY			

REV	DATE	DESCRIPTION
1	10/23/2008	PRELIMINARY