

ATTENUATOR TAB & COVER 200 WATT



DATA SHEET

PART SERIES: 83-7019TC-30.00

SHEET 1 OF 2
Dwg 83-7019TC-30.00

EN 13-3534
Revision -

FEATURES


- Tab Launch
- High Power
- Excellent Heat Transfer
- Low VSWR
- Easy Installation
- Wide Attenuation Offering

APPLICATIONS

- Mobile Networks
- Broadcast
- High Power Amplifiers
- Isolators
- Military
- Instrumentation

GENERAL DESCRIPTION

EMC Technology offers the widest selection of flangeless attenuators worldwide. Tab and cover components offer the highest performance of any style of attenuator component.

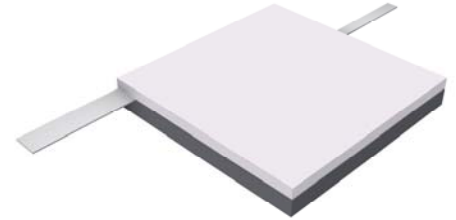

ORDERING INFORMATION

Part Identifier:

83-7019TC- 30.00

└─ Attenuation Value

SPECIFICATIONS

1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	1.8 - 2.0 GHz
Attenuation Values Available:	30.0 dB
Attenuation Accuracy:	± 1.0 dB
Input Power CW:	200 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	2000 watts (based on 10us pulse width and 1% duty cycle)
VSWR:	1.25:1 Max

2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
Non-operating Temperature:	-65°C to +150°C
Temperature Coefficient:	+/-200 PPM / °C max

3.0 MARKING

Unit Marking: Logo and Part Number; legibility and permanency per MIL-STD-130

4.0 QUALITY ASSURANCE

Sample Inspect Per MIL-STD-105, Level II, 1.0% AQL.

Visual and Mechanical Examination for Conformance To Outline Drawing Requirements.

Measure Attenuation and VSWR

Data Retention – Standard

5.0 PACKAGING

Standard Packaging: Tray

ATTENUATOR TAB & COVER 200 WATT



DATA SHEET



PART SERIES: 83-7019TC-30.00

SHEET 2 OF 2
Dwg 83-7019TC-30.00

EN 13-3534
Revision -

6.0 MECHANICAL

Substrate Material:	Aluminum Nitride
Resistive Film:	Nichrome
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Tin/Lead
Metric Dimensions:	Provided for reference only

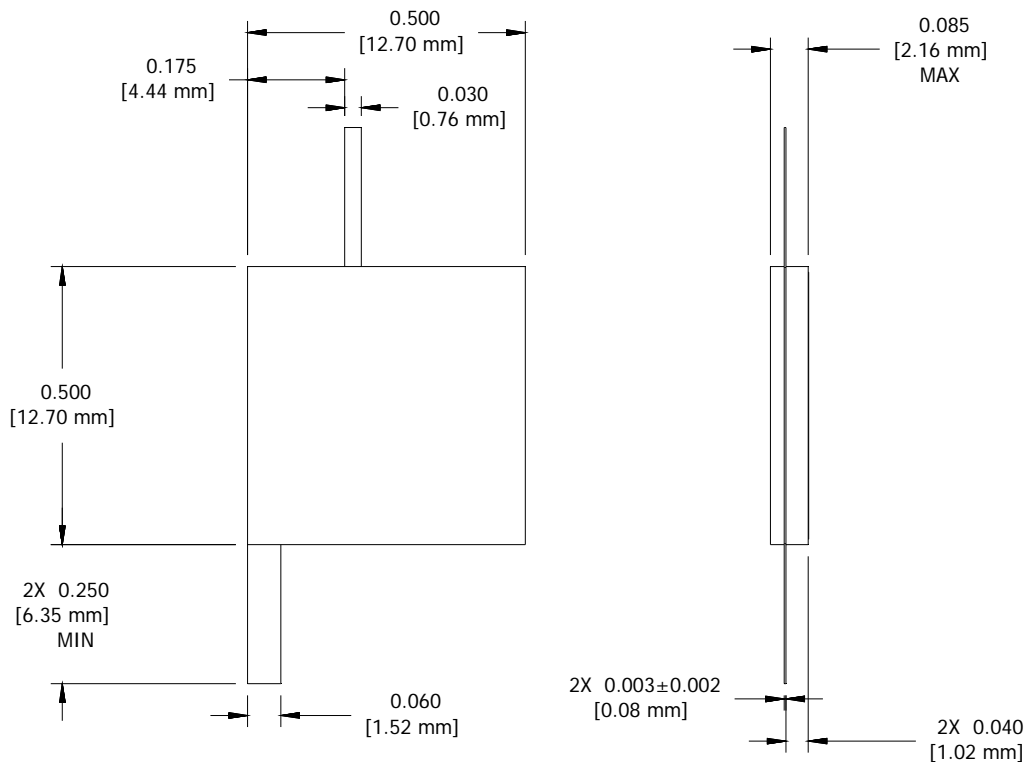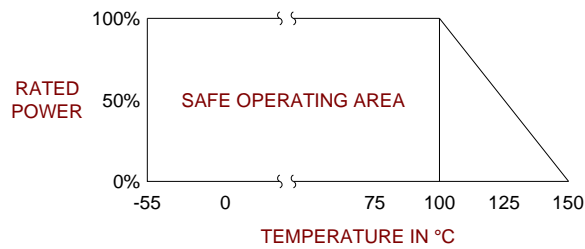

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.02 X.XXX = ± 0.010