

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: AN3-XNXW3F

SHEET 1 OF 3  
Dwg 1011585

EN 16-0779  
Revision C

## FEATURES

Temperature Variable  
Compact Package  
Wideband Performance  
Passive Gain Compensation  
Rugged Construction  
MIL-PRF-3933

## APPLICATIONS

Power Amplifiers  
Instrumentation  
Mobile Networks  
Point-to-Point Radios  
Satellite Communications  
Military Radios  
Up/Down Converters




## GENERAL DESCRIPTION

EMC Technology is the leading authority in temperature variable attenuators. Thermopad<sup>®</sup> temperature variable attenuators have been a highly reliable passive solution for over temperature gain compensation for more than 20 years. All Thermopad<sup>®</sup> products can be qualified for high-reliability and space applications.

## ORDERING INFORMATION

### Part Identifier:

**AN3-XNXW3F**

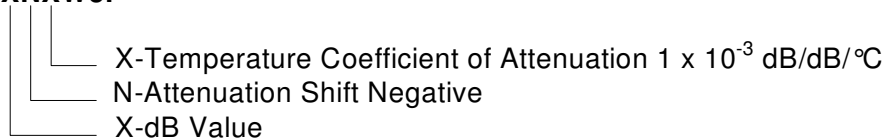

## SPECIFICATIONS

### 1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	DC – 4 GHz
Attenuation Values Available:	1-10 dB in 1 dB increments
Attenuation Accuracy:	@ 25°C: $\pm 0.75$ dB @ 1GHz
VSWR:	1.35:1 Max
Input Power	2 Watts Full Rated Power To 125°C, Derated Linearly to 0 Watts at 150°C.
Temperature Coefficient of Attenuation:	-0.003, -0.004, -0.005, -0.006, -0.007, and -0.009 dB/dB/°C
Temperature Coefficient Tolerance:	$\pm 0.001$ dB/dB/°C

### 2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
------------------------	-----------------

### 3.0 MARKING

Unit Marking:	dB Value (XX), Direction Of Shift (N) And TCA Shift (X).
---------------	--

### 4.0 QUALITY ASSURANCE

Sample Inspect Per ANSI/ASQC Z1.4 General Inspection, Level II, AQL=1.0.  
Visual and Mechanical Examination for Conformance to Outline Drawing Requirements  
Sample Inspection (Destructive Testing).

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: AN3-XNXW3F

SHEET 2 OF 3  
Dwg 1011585

EN 16-0779  
Revision C

Select three (3) units from lot and measure DCA every 20°C over the temperature range of -55°C to +125°C; Calculate using linear regression, the slope of the curve.

Calculate TCA using the following formula:

$$TCA = \frac{Slope}{Attenuation @ 25^{\circ}C}$$

Inspection in accordance with 824W107

Test Data Requirements:

No Data Required for Customer

Data Retention – 24 Months

## 5.0 PACKAGING

Standard:

Tape and Reel

## 6.0 MECHANICAL

Substrate Material:

Alumina

Terminal Material:

Thick Film, Lead Free Plating

Workmanship


PER MIL-PRF-55342

Resistive Element:

Thick Film

Metric Dimensions:

Provided for reference only

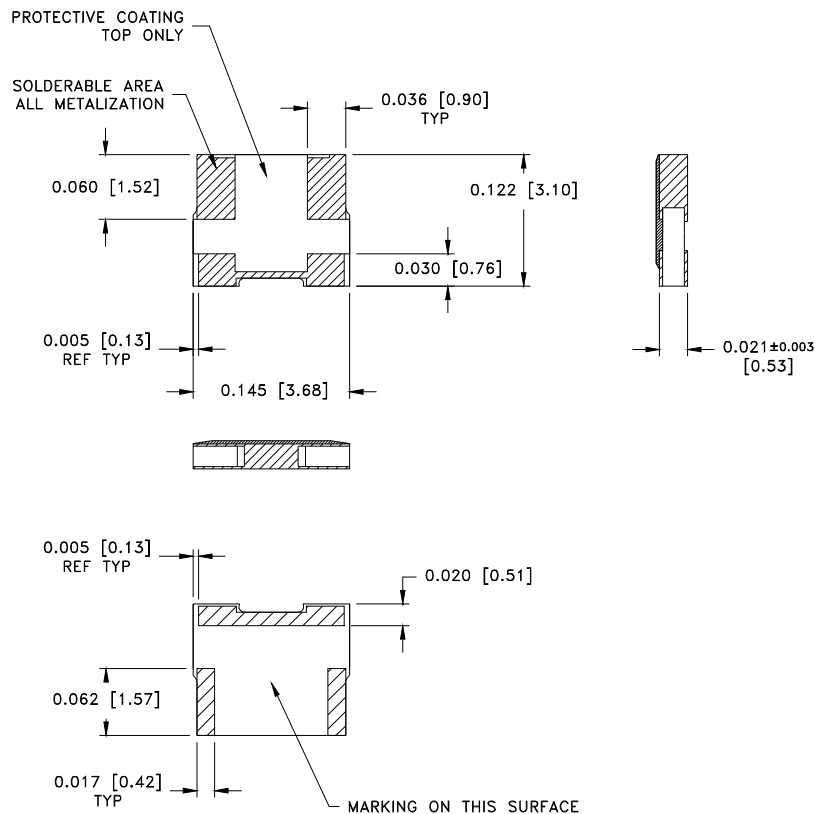

Unless Otherwise Specified: TOLERANCE: X.XXX = ± 0.005

# ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: AN3-XNXW3F

SHEET 3 OF 3  
Dwg 1011585

EN 16-0779  
Revision C

## 7.0 FOOTPRINT

Part Number	Inches						mm					
	A	B	C	D	S	W	A	B	C	D	S	W
AN3-XNXF	0.043	0.063	0.067	0.035	0.032	0.152	1.09	1.60	1.70	0.89	0.81	3.86

