


EDD

DRAWING NO.: R030-125A-*
REV. C

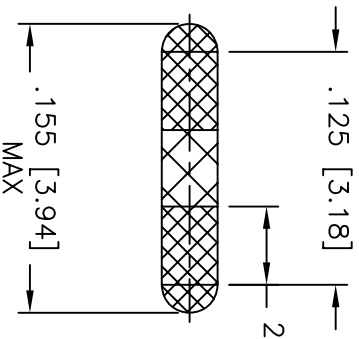

MATERIALS:
 SUBSTRATE: ALUMINA
 RESISTIVE FILM: THIN FILM
 PROTECTIVE COATING: EPOXY PAINT

FINISH:
 ROHS COMPLIANT
 TERMINALS: SOLDER DIPPED Sn96

TECHNICAL: (RESISTOR)
 AVERAGE POWER (WATTS): 0.05
 DC RESISTANCE: ± 5% STANDARD
 RESISTANCE RANGE (OHMS): 50 & 100
 TEMPERATURE COEFFICIENT: ± 200 PPM MAX
 OPERATING TEMPERATURE (°C): -55° TO +150°

REV.	DESCRIPTION	DRAWN	APVD.	EN#	08-F0163	APVD	DATE	REFERENCE	MATERIAL	FINISH	TITLE
C	08-F0904	OJC 10/01/08									RESISTOR, ROD
				UNLESS OTHERWISE SPECIFIED 1. DO NOT SCALE DRAWING 2. DIMENSIONS ARE IN INCHES 3. DIMENSIONS ARE AFTER PLATING 4. CORNERS, EDGES AND FILLETS: R .005 MAX 5. SURFACE ROUGHNESS: 63/ 6. REMOVE ALL BURRS							
				TOLERANCES X ± .XX ± .XXX ± .010 ANGLES X ±							
				THE INFORMATION CONTAINED HEREIN IS: (A) CONSIDERED PROPRIETARY TO FLORIDA RF LABS INC.; (B) PROTECTED BY COPYRIGHT OWNED BY FLORIDA RF LABS INC.; (C) CONSIDERED A WORK FOR HIRE UNDER COPYRIGHT LAW; (D) PROTECTED BY TRADE SECRET LAWS WHICH MAKE RELEASE OF THIS INFORMATION FOR THE PURPOSE WHICH IT IS TO BE USED SUBJECT TO THE PROTECTIVE WHICH IS APPLIED TO THE INFORMATION SHALL NOT BE DISCLOSED IN WHOLE OR IN PART, TO ANY PARTY, FOR ANY REASON WITHOUT THE EXPRESS WRITTEN CONSENT OF A QUALIFIED EXECUTIVE OF FLORIDA RF LABS INC.							
		SCALE	CAGE CODE	ID NO.	SIZE	DRAWING NO.:	REV.				
		10/1	2Y194	A		R030-125A-*	C				
		MFG:	CHKD.:	DRAWN:	GRH	SHEET	OF				
				02/29/08	1	1	1				

