



NOTES

- 1. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE $\pm .010$ " [.254mm]
- *2. DIMENSIONS APPLY BEFORE SOLDER. ALLOW 0.020 MAX. FOR ALL PRETINNED SURFACES.

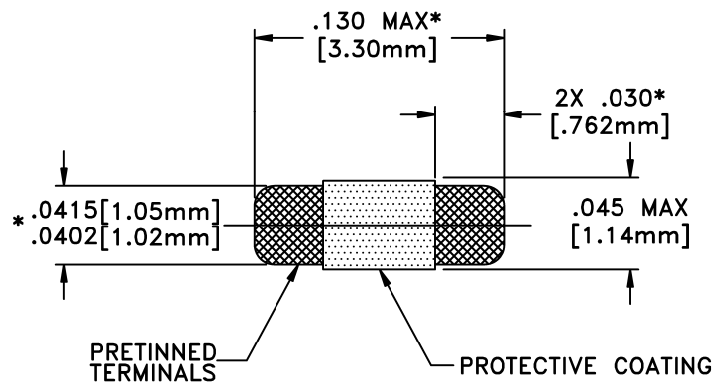

MATERIALS:

SUBSTRATE: BERYLLIA 99.5%
 FINISH:
 TERMINAL: SOLDER COATED NICKEL

ELECTRICAL:

INPUT POWER: IN AIR 125°C: 0.1 WATT
 HEAT SINK 100°C: 2 WATTS
 DC RESISTANCE: 10 OHMS - 250 OHMS
 OPERATING TEMPERATURE: -55°C TO +125°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EMC TECHNOLOGY AND FLORIDA RF LABS AND SHALL NOT BE DUPLICATED OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF PARTS OR DEVICES WITHOUT PERMISSION

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES FRACT --- -- ANG --- -- .XX --- -- .XXX $\pm .010$.XXXX $\pm .0020$	TITLE RESISTOR, ROD, ASSEMBLY (772)286-9300 ASSY REF
CAGE CODE 24602	CAGE CODE 2Y194	8851 SW OLD KANSAS AVE STUART, FL 34997	DRAWN BY JG
REV F	DATE 5/20 2010	CHANGE DESCRIPTION EN 10-0681	CHECKED BY APPROVED BY
REVISION		VENDOR CODE N/A	DRAWING NUMBER R040-125B-*
		PLOT SCALE NONE	SHEET 1 OF 1

REV F	DATE 5/20 2010	CHANGE DESCRIPTION EN 10-0681
REVISION		