

ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: MTVA0X00N0X

SHEET 1 OF 3
Dwg 1007725


EN 16-0736
Revision AK

FEATURES

Temperature Variable
Compact Package
Wideband Performance
Passive Gain Compensation
Rugged Construction
MIL-PRF-3933

APPLICATIONS

Power Amplifiers
Instrumentation
Mobile Networks
Point-to-Point Radios
Satellite Communications
Military Radios
Up/Down Converters




GENERAL DESCRIPTION

EMC Technology is the leading authority in temperature variable attenuators. Thermopad® temperature variable attenuators have been a highly reliable passive solution for over temperature gain compensation for more than 20 years. All Thermopad® products can be qualified for high-reliability and space applications.

ORDERING INFORMATION

Part Identifier: **MTVA0X00N0X**

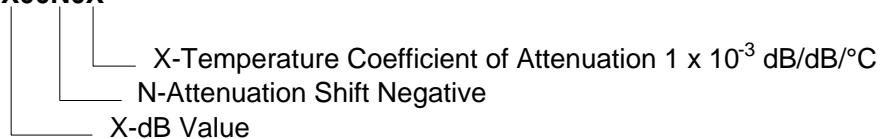

SPECIFICATIONS

1.0 ELECTRICAL

Nominal Impedance:	50 ohms
Frequency Range:	-.001 thru -.005 DC – 18 GHz -.006 thru -.009 DC – 12.4 GHz
Attenuation Values Available:	0-10 dB
Attenuation Accuracy:	@ 25°C: ± 0.5 dB @ 1 GHz
VSWR:	1.30:1 Max @ 1 GHz
Input Power	200 milliwatts cw. Full Rated Power to 125°C, Derated Linearly to 0 watts @ 150°C.
Temperature Coefficient of Attenuation:	-0.001, -0.002, -0.003, -0.004, -0.005, -0.006, -0.007, -0.008, -0.009 dB/dB/°C
Temperature Coefficient Tolerance:	± 0.001 dB/dB/°C

2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
------------------------	-----------------

3.0 MARKING

Unit Marking:	dB Value (X), Direction of Shift (N) and TCA Shift (X).
---------------	---

4.0 QUALITY ASSURANCE

Sample Inspect Per ANSI/ASQC Z1.4 General Inspection, Level II, AQL=1.0.

Visual and Mechanical Examination for Conformance to Outline Drawing Requirements

Sample Inspection (Destructive Testing).

Select three (3) units from lot and measure DCA every 20°C over the temperature range of

ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: MTVA0X00N0X

SHEET 2 OF 3
Dwg 1007725

EN 16-0736
Revision AK

-55°C to +125°C; Calculate using linear regression, the slope of the curve.

Calculate TCA using the following formula:

$$TCA = \frac{\text{Slope}}{\text{Attenuation @ 25}^\circ\text{C}}$$

Inspection in accordance with 824W107

Test Data Requirements:

No Data Required for Customer


Data Retention – 24 Months

5.0 PACKAGING

Standard: Tape & Reel

6.0 MECHANICAL

Substrate Material: Alumina, 96% MIL-I-10
Terminal Material: Thick Film, Nickel Barrier, Solder Plated
Workmanship: Per MIL-PRF-55342
Resistive Element: Thick Film
Metric Dimensions: Provided for reference only

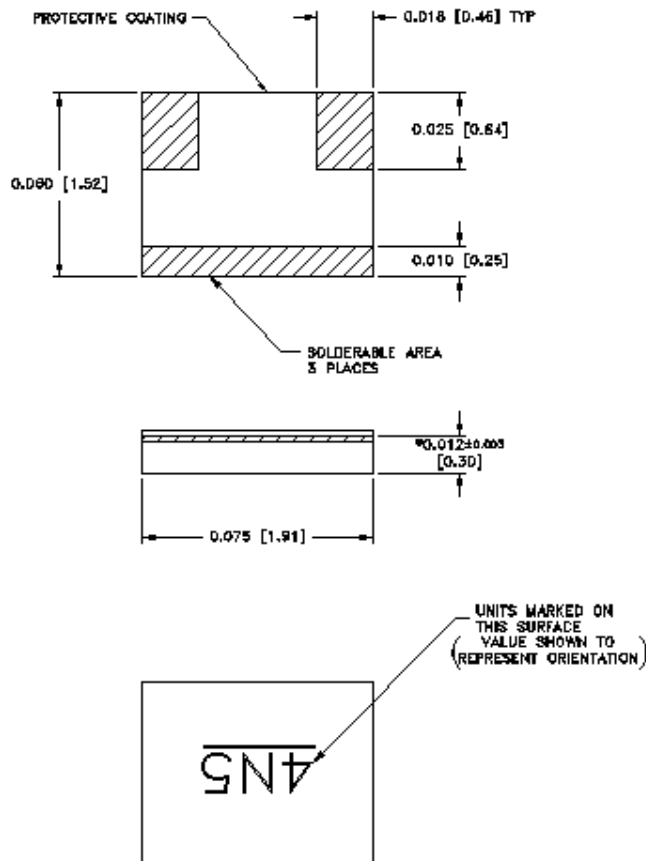

Unless Otherwise Specified: TOLERANCE: X.XXX = ± 0.005

ATTENUATOR TEMPERATURE VARIABLE



DATA SHEET

PART SERIES: MTVA0X00N0X

SHEET 3 OF 3
Dwg 1007725

EN 16-0736
Revision AK

7.0 FOOTPRINT

Part Number	Inches						mm					
	A	B	C	D	S	W	A	B	C	D	S	W
MTVA0X00N0X	0.022	0.028	0.041	0.013	0.026	0.075	0.56	0.71	1.04	0.33	0.66	1.91

