


CABLE SPECIFICATIONS

Lab-Flex® 125



DATA SHEET PART SERIES: Lab-Flex® SHEET 1 OF 2


Lab-Flex® 125 cable offers about 30% reduction in loss when compared to solid dielectric cables of the same diameter. With 2.4mm Connectors, Lab-Flex 125 provides a cost effective, low loss cable for frequencies up to 50 GHz.

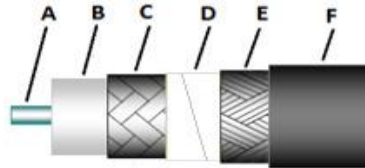


1.0 Electrical Data			
Frequency, Max (GHz)	50.0		
Impedance, nominal (Ω)	50		
Velocity of Propagation (%)	78		
Shielding Effectiveness, 18 GHz (dB/ft)	>-90dB		
Capacitance (pF/ft)	26		
Delay (ns/ft), (ns/meter)	1.3	4.268504	
Attenuation k1 (db/100ft) @ 23 deg C	0.50533		Attenuation (Typical) at any Frequency =k1 x SqRt (FMHz) + k2 x (FMHz)
Attenuation k2 (db/100ft) @ 23 deg C	0.00062		

2.0 Mechanical/Environmental Data			
Weight (lbs/100ft), (Kg/100m)	1.80	2.71	
Temperature Range (°C)	-65 to +200 deg. C		
Minimum Bend Radius (inch), (mm)	0.60	15.24	

3.0 Construction Data			
Inner Conductor (inch)	A	-	Solid SPC
Dielectric (inch)	B	-	Expanded PTFE
First Outer Shield (inch)	C	-	SPC Flat Braid
Second Outer Shield (inch)	D	-	Aluminum Polyimide Foil
Third Outer Shield (inch)	E	-	SPC Round Braid
Jacket (inch O.D.)	F	0.122	FEP

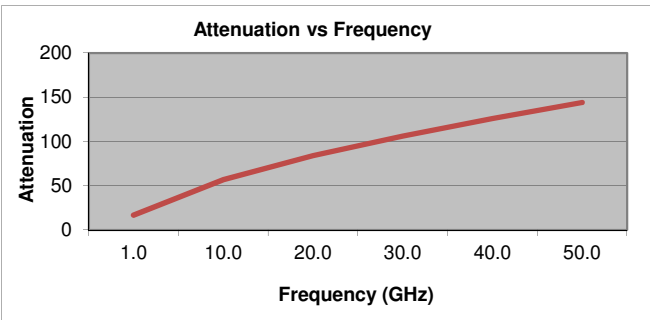

(dB per 100 feet)

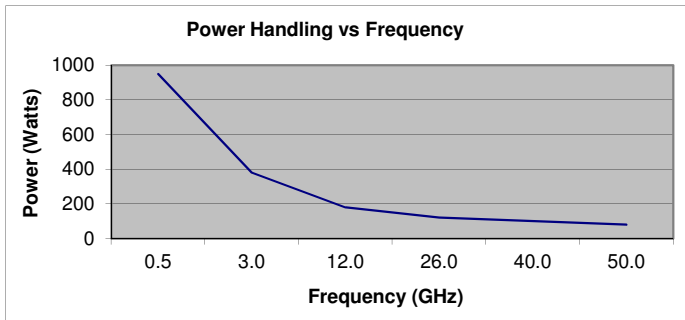

*CW Power in watts at sea level and 23°C

Frequency GHz	1.0	18.0	26.0	32.0	40.0	50.0
Typical Loss dB/100ft	16.6	79.0	97.6	110.2	125.9	144.0

Frequency GHz	1.0	12.0	18.0	26.0	32.0	40.0
CW Power in Watts	650.0	180.0	140.0	120.0	110.0	100.0

CABLE SPECIFICATIONS

Lab-Flex® 125



DATA SHEET PART SERIES: Lab-Flex® SHEET 2 OF 2

Standard Connectors:

Cable Code	Connector Code	Series	Gender	Type	C-Nut Style*	Body Material*	Body Finish*	Loss per GHz	Frequency Max GHz
125	SMS	SMA	(Male)	Straight	H	SS	P	0.01	18
125	SFS	SMA	(Female)	Straight	N/A	SS	P	0.015	18
125	MMS	2.4mm	(Male)	Straight	H	SS	P	0.01	50
125	MFS	2.4mm	(Female)	Straight	N/A	SS	P	0.015	50
125	KMS	2.9mm	(Male)	Straight	H	SS	P	0.01	40
125	KFS	2.9mm	(Female)	Straight	N/A	SS	P	0.015	40
125	NMS	Type-N	(Male)	Straight	H	SS	P	0.01	18
125	NFS	Type-N	(Female)	Straight	N/A	SS	P	0.015	18

* C-nut Style: H= Hex, K=Knurled, HK= Hex Nut & Knurled

*Body Materials: B=Brass, SS=Stainless Steel, Be= Beryllium Copper

*Body Finish: N= Nickel, S=Silver, G=Gold, P= Passivated, T= Tri-metal

Sex of connector is determined by center pin

Standard Options:

Cable Code	Option Code	Option Description	Option Details
125	+/-2.8PS	Phase Match	Standard Tolerance of +/-2.8PS
125	RoHS	RoHS Compliant	Per EU Directive 2002/95/EC
125	W	Weatherized	Weatherized Jacket (With Pel-Seal)
125	D/DD	Dust Cap one side/Both Sides	
125	E/EE	Extended Booting One Side/ Both Sides	

*for RoHS complaint assemblies (-ROHS) is required to be added to end of standard part number
ex. NMS-125-120.0-NMS-ROHS

*for phase matched assemblies (+/-2.8PS) is require to be added to the end of standard part number
ex. NMS-125-120.0-NMS+/-2.8PS

Custom Options:

The above connectors and options the most common types used. Florida RF Labs offers a wide range of cables, connectors and options. If you do not see an option you require please consult the sales department.