


CMD Series

High Density PCB Signal Connectors



Hyperboloid Technology

Smiths Interconnect offers an extensive range of superior contact technologies suitable for standard and custom solutions. Hypertac® (HYPERboloid conTACT) is the original superior performing hyperboloid contact technology designed for use in all applications and in harsh and demanding environments where high reliability and safety are critical. The inherent electrical and mechanical characteristics of the Hypertac hyperboloid contact ensures unrivalled performance in terms of reliability, number of mating cycles, low contact force and minimal contact resistance. The shape of the contact sleeve is formed by hyperbolically arranged contact wires, which align themselves elastically as contact lines around the pin, providing a number of linear contact paths.

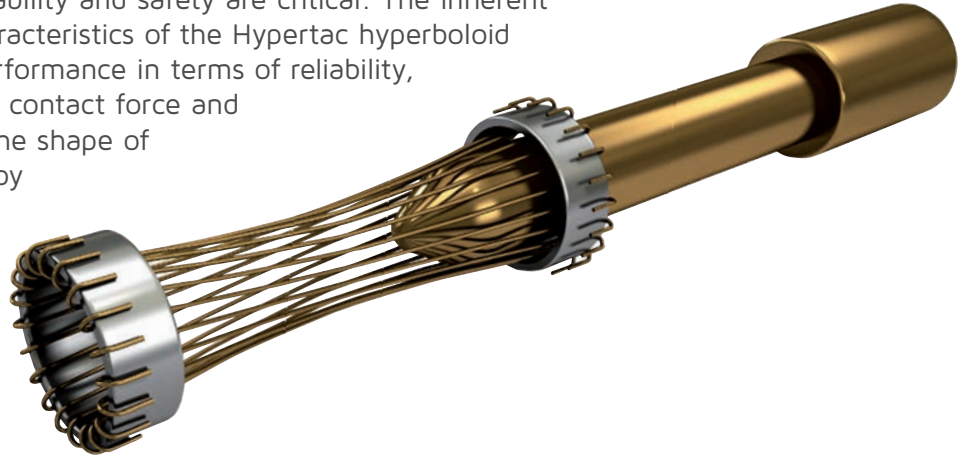

Features

Benefits

Low insertion/extraction forces

The angle of the socket wires allows tight control of the pin insertion and extraction forces. The spring wires are smoothly deflected to make line contact with the pin.

High density interconnect systems

Significant reductions in size and weight of sub-system designs. No additional hardware is required to overcome mating and un-mating forces.

Long contact life

The smooth and light wiping action minimizes wear on the contact surfaces. Contacts perform up to 100,000 insertion/extraction cycles with minimal degradation in performance.

Low cost of ownership

The Hypertac contact technology will surpass most product requirements, thus eliminating the burden and cost of having to replace the connector or the entire subsystem.

Lower contact resistance

The design provides a far greater contact area and the wiping action of the wires insures a clean and polished contact surface. Our contact technology has about half the resistance of conventional contact designs.

Low power consumption

The lower contact resistance of our technology results in a lower voltage drop across the connector reducing the power consumption and heat generation within the system.

Higher current ratings

The design parameters of the contact (e.g., the number, diameter and angle of the wires) may be modified for any requirement. The number of wires can be increased so the contact area is distributed over a larger surface. Thus, the high current carried by each wire because of its intimate line contact, can be multiplied many times.

Maximum contact performance

The lower contact resistance of the Hypertac contact reduces heat build-up; therefore Hypertac contacts are able to handle far greater current in smaller contact assemblies without the detrimental effects of high temperature.

Immunity to shock & vibration

The low mass and resultant low inertia of the wires enable them to follow the most abrupt or extreme excursions of the pin without loss of contact. The contact area extends 360° around the pin and is uniform over its entire length. The 3 dimensional symmetry of the Hypertac contact design guarantees electrical continuity in all circumstances.

Reliability under harsh environments

Harsh environmental conditions require connectors that will sustain their electrical integrity even under the most demanding conditions such as shock and vibration. The Hypertac contact provides unmatched stability in demanding environments when failure is not an option.

Contents

CMD Series

Scope	2
Applied documents.....	3
Requirements	3
Quality assurance provisions	5
Packaging	5
Notes.....	5
Selection chart	6
Plug connector: 42, 82, 110, 126, 158 and 174 pin contact positions.....	8
Receptacle connector: 42, 82, 110, 126, 158 and 174 socket contact positions	17
Plug connector: 220, 236 and 316 pin contact positions	26
Receptacle connector: 220, 236 and 316 socket contact positions	35
Polarization configuration chart	44
Maximum dimensions of mated connectors	45
The connector halves mating	50
Connectors for measuring and test	53
Flex circuit soldering.....	59

1. Scope

1.1 Scope

This Design covers CMD Connectors Family, plug and receptacle style, with 42, 82, 110, 126, 158, 174, 220, 236 and 316 pin or socket contact positions, conforming to MIL-DTL-55302. Contact arrangement is offset-grid pattern within dielectric connector body with four rows, .075 in (1.905 mm) center-to-center contact spacing in each row, and .075 in (1.905 mm) row-to-row spacing. Contact size is 0.6 mm nominal pin DIA. Polarization feature is incorporated in each connector assembly to assure correct insertion. Coding key system provides 36 possible keying combinations. There are available, moreover, suitable dielectric connector body cavities aimed at ground contacts, shielded contacts, co-axial contacts, databus contacts, fiber optic termini, etc.

1.2 Contact terminal types

1.2.1 **Plug connector**, pin contacts equipped, contact terminal types available are:

- a. solder post, thru hole, as dip solder right angle contact terminal for rigid PCB, (daughterboard application, or in line arrangement board-to-board connection);
- b. solder post, thru hole, as dip solder straight contact terminal for rigid PCB, (in parallel arrangement board-to-board connection);
- c. solder tail, as surface mount contact terminal for rigid PWB, when plug connector is assembled with proper flex-circuit conforming to MIL-P-50884, and its surface mount tails are the contact terminals for straddle mount, (daughterboard application, or in line arrangement board-to-board connection).

1.2.2 **Receptacle connector**, socket contact equipped, contact terminal types available are:

- a. solder post, thru hole, as dip solder straight contact terminal for rigid PWB, (motherboard application, or in parallel arrangement board-to-board connection);
- b. solder post, thru hole, as dip solder right angle contact terminal for rigid PCB, (in line arrangement board-to-board connection);
- c. wire wrap post, as solderless contact terminal in accordance with MIL-STD-1130, (backplane attachment);
- d. solder tail, as surface mount contact terminal for rigid PCB, when receptacle connector is assembled with proper flex-circuit conforming to MIL-P-50884, and its surface mount tails are the contact terminals for straddle mount, (in line arrangement board-to-board connection).

1.3 Plug and receptacle connectors for measuring and test devices available are:

- a. plug and receptacle connector for extender board, (as rigid vehicle for measuring and test devices);
- b. plug and receptacle connector for cable assembly, (as flexible vehicle for measuring and test devices);
- c. card edge receptacle test connector and its proper plug connector, (for measuring and test devices).

2. Applied documents

2.1 Applied documents

CMD Connectors Family is designed, manufactured, tested and delivered in accordance with the documents listed below. The latest issue of the following documents, documents amendments and notices, in being on 30 June 1994 are used unless otherwise specified in this Design.

- MIL-C-26074 Coatings, electroless nickel requirement for.
- MIL-I-46058 Insulating compound, electrical (for coating printed circuit assemblies).
- MIL-P-50884 Printed-wiring, flexible and rigid-flex.
- MIL-DTL-55302 Connectors, printed circuit subassembly and accessories.
- MIL-I-81550 Insulating compound electrical, embedding, reversion resistant silicone.
- MIL-STD-1130 Connections, electrical, solderless wrapped.
- MIL-STD-2118 Flexible and rigid-flex printed-wiring for electronic equipment design requirements for.
- MS21209 Insert, screw thread, coarse and fine, screw locking, helical coil, cres.

3. Requirements

3.1 Connector body is an insulator body of molded one-piece construction.

3.1.1 Connector body material is injection molded from glass reinforced polyphenylene sulfide (PPS) type GST-40F per MIL-M-24519 and in accordance with MIL-DTL-55302. This thermoplastic compound is flame resistant, having flammability rating V-O/5VA, without additives, per UL94.

3.2 Pin contact and contact terminal

3.2.1 Pin contact and dip solder, (right angle and straight), contact terminal are screw machined, and one-piece construction.

3.2.1.1 Pin contact and dip solder, (right angle and straight), contact terminal materials are beryllium-copper alloy per QQ-C-530, (ASTM B197), with protective finishing of gold plate, over suitable underplate, as specified in MIL-DTL-55302.

3.2.2 Pin contact and crimp contact terminal are screw machined, one-piece construction.

3.2.2.1 Pin contact and crimp contact terminal materials are copper-alloy per QQ-B-626, (ASTM B16), with protective finishing of gold plate, over suitable underplate, as specified in MIL-DTL-55302.

3.2.3 Pin contact and its surface mount tail terminal are two-pieces construction type. These two-parts are assembled in one-piece construction using a suitable tin-lead soldering.

3.2.3.1 Pin contact and its surface mount tail terminal materials. Pin contact screw machined from copper-alloy per QQ-B-626, (ASTM B16), with protective finishing of gold plate, over suitable underplate, as specified in MIL-DTL-55302. The surface mount tail terminal is the part of a proper flex-circuit conforming to MIL-P-50884 with tail finishing of tin-lead (50÷70%) composition, .50 to .80 mil (12 to 20 µm) thick, per MIL-P-81728. Pin contact is soldered with flex-circuit, as its contact terminal, using solder alloy composition Sn63 conforming to QQ-S-571.

3.3 Socket contact and contact terminal

The CMD connector is equipped with Hypertac® Hyperboloid contact technology. Termination styles available are: dip solder, (straight and right angle), wire wrappost, surface mount tail, and crimp.

3.3.1 Socket contact materials

Hypertac® springs are wire drawn from beryllium-copper alloy per QQ-C-530, (ASTM B197). Socket contact body is screw machined from copper-alloy per QQ-B-626, (ASTM B16). Protective finishing is gold plate, over suitable underplate, as specified in MIL-DTL-55302.

3.3.2 Dip solder, (straight and right angle), wire wrappost, and crimp socket contact terminals are screw machined, one-piece construction.

3.3.2.1 Dip solder, (straight and right angle), wire wrappost, and crimp socket contact terminal materials are proper copper-alloys in accordance with MIL-DTL-55302, with protective finishing of gold plate, over suitable underplate, as specified in MIL-DTL-55302.

3.3.3 Socket contact surface mount tail terminal is two-pieces construction type. These two-parts are assembled in one-piece construction using a suitable tin-lead soldering.

3.3.3.1 Socket contact end and its surface mount tail terminal materials.

Socket contact end is screw machined from copper-alloy per QQ-B-626, (ASTM B16), with finishing of tin-lead (50±70%) composition per MIL-P-81728 over nickel underplate per QQ-N-290. The surface mount tail terminal is the part of a proper flex-circuit conforming to MIL-P-50884 with tail finishing of tin-lead (50±70%) composition, .50 to .80 mil (12 to 20 µm) thick, per MIL-P-81728. Socket contact end is soldered with flex-circuit, as its contact terminal, using solder alloy composition Sn63 conforming to QQ-S-571.

3.4 Connector hardware is formed by male guide pins plus female guide sockets (polarized, unpolarized and omnipolarized types), mounting hardware, and joining devices.

3.4.1 Connector hardware materials

Male guide pins are screw machined from stainless steel per ASTM A582, (AISI 303), and passivated per ASTM-A-967. Female guide sockets, (polarized, unpolarized and omnipolarized types), are screw machined from beryllium-copper alloy per QQ-C-530, (ASTM B196), and nickel plated per QQ-N-290. Mounting hardware is machined from aluminum alloy per QQ-A-250/4 and finished with electroless nickel coating per MIL-C-26074. Joining devices are machined from corrosion-resistant steel per ASTM-A-693, (ASTM A666), and passivated per ASTM-A-967. Threaded inserts, self-locking type, are conforming to MS21209.

3.4.2 Polarization guide set provides 36 possible polarized position combinations; plus unpolarized male guide pins on plug connector, and omnipolarized female guide sockets on receptacle connector for measuring and test devices, (i.e. extender board applications), as shown on page 44 of this catalog.

3.5 Design and construction of CMD Connectors Family are in accordance with MIL-DTL-55302 requirements.

3.6 CMD Connectors Family requirements are:

- contact engagement and separation forces: maximum engagement force =100 g (3.53 oz); minimum separation force =14 g (.49 oz);
- connector mating and unmating forces: maximum mating force =60 g (2.12 oz) multiplied by number of contacts; minimum unmating force =20 g (.71 oz) multiplied by number of contacts;
- contact current rating: the connector may have any combination of current flow and ambient temperature provided the contact or connector temperature does not exceed 125° C. If mated plug and receptacle connectors are both equipped with dip solder, or wire wrap post, or crimp as contact terminals, the test current is 3.0 A for individually connected contact, and 2.0 A for series wired contacts; if mated plug and receptacle connectors are, one of them or both of them, assembled with flex-circuit as surface mount tail contact terminals, test current is 1.5 A for individually connected contact, and 1.0 A for series wired contacts, in accordance with MIL-STD-2118;
- mated contact resistance: 5.0 mΩ maximum individual, if pin and socket contacts have dip solder, or wire wrap post, or crimp as contact terminals; the flex-circuit resistance plus the soldering resistance, (namely surface mount tail terminal resistance), is 4.0 mΩ maximum individual; the total resistance equals the surface mount tail terminal resistance plus the mated contact resistance;
- temperature range: normal operating temperature is between -65° C and +125° C;
- dielectric withstanding voltage: 750 VRMS, 60 Hz at sea level, 250 VRMS, 60 Hz at 70,000 feet (21,336 m), when flex-circuit and its surface mount tails are conformally coated of a suitable electrical insulating compound as specified in MIL-I-46058;
- insulation resistance is \geq 5000 MΩ at 500 VDC;
- contact life: 30,000 insertion and withdrawal cycles, with minimum wear;
- vibration: when tested in accordance with MIL-DTL-55302, and MIL-STD-1344 method 2005, 10-2000 Hz, 15 G peak, 4 h per axis, 100 mA, there are no interruption in continuity greater than 2 ns of the test circuit which incorporates mated contacts;
- shock: when tested in accordance with MIL-DTL-55302, and MIL-STD-1344 method 2004, 6 ms, 100 G sawtooth, six shocks, 100 mA, there are no interruption in continuity greater than 2 ns of the test circuit which incorporates mated contacts;
- solderability: in accordance with MIL-STD-202 method 208 at a uniform temperature of 245° C for 5 s;
- resistance to soldering heat: in accordance with MIL-STD-202 method 210 condition C, 260° C for 10 s;
- capacitance: contact to contact maximum 2.0 pF;
- calculated inductance: maximum 15 nH.

4. Quality assurance provisions

CMD Connectors Family is inspected using data values of Section 3 of this Design, and examinations and test methods in accordance with MIL-DTL-55302.

5. Packaging


Packaging requirements are in accordance with "Smiths Interconnect's Packaging Procedures", and then packaging is adequate to provide protection against any damage, breakage, or loss during shipment from the supply source to the ultimate using activity.

6. Notes

CMD Connectors Family is designed for printed wiring board-to-printed wiring board, or printed wiring board-to-cable interconnection, of high density electronic packaging equipment subassemblies with low-power requirements.

Selection Chart

BODY CONNECTOR DIMENSIONS



Connector figure (mating face)	W max (mm)	H max (mm)	D max (mm)
	37.210	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	56.260	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	69.595	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	77.215	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	92.455	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	100.075	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	128.650	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	136.270	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00
	174.370	10.90	10.61 ⁽¹⁾ 19.40 ⁽²⁾
			8.00

⁽¹⁾ Applicable to plug connector body equipped with dip solder, straight thru, contact terminal.

⁽²⁾ Applicable to plug connector body equipped with all the other contact terminal styles.

Contact positions	Connector style	Contact terminal types available are:				See pages
		Dip solder (Straight thru)	Dip solder (Right angle)	Surface mount tail	Wire wrap post	
42	Plug connector pin contacts equipped	Yes	Yes	Check Firm	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Check Firm	Yes	17 to 25
82	Plug connector pin contacts equipped	Yes	Yes	Check Firm	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Check Firm	Yes	17 to 25
110	Plug connector pin contacts equipped	Yes	Yes	Yes	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Yes	Yes	17 to 25
126	Plug connector pin contacts equipped	Yes	Yes	Check Firm	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Check Firm	Yes	17 to 25
158	Plug connector pin contacts equipped	Yes	Yes	Yes	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Yes	Yes	17 to 25
174	Plug connector pin contacts equipped	Yes	Yes	Yes	No	8 to 16
	Receptacle connector socket contacts equipped	Yes	Yes	Yes	Yes	17 to 25
220	Plug connector pin contacts equipped	Check Firm	Yes	Check Firm	No	26 to 34
	Receptacle connector socket contacts equipped	Yes	Yes	Check Firm	Yes	35 to 43
236	Plug connector pin contacts equipped	Check Firm	Yes	Yes	No	26 to 34
	Receptacle connector socket contacts equipped	Yes	Yes	Yes	Yes	35 to 43
316	Plug connector pin contacts equipped	Check Firm	Yes	Yes	No	26 to 34
	Receptacle connector socket contacts equipped	Yes	Yes	Yes	Yes	35 to 43

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Plug Connector: 42, 82, 110, 126, 158 and 174 Pin contact positions, .075 inch spacing (1.905 mm), dip Solder (right angle) terminal style

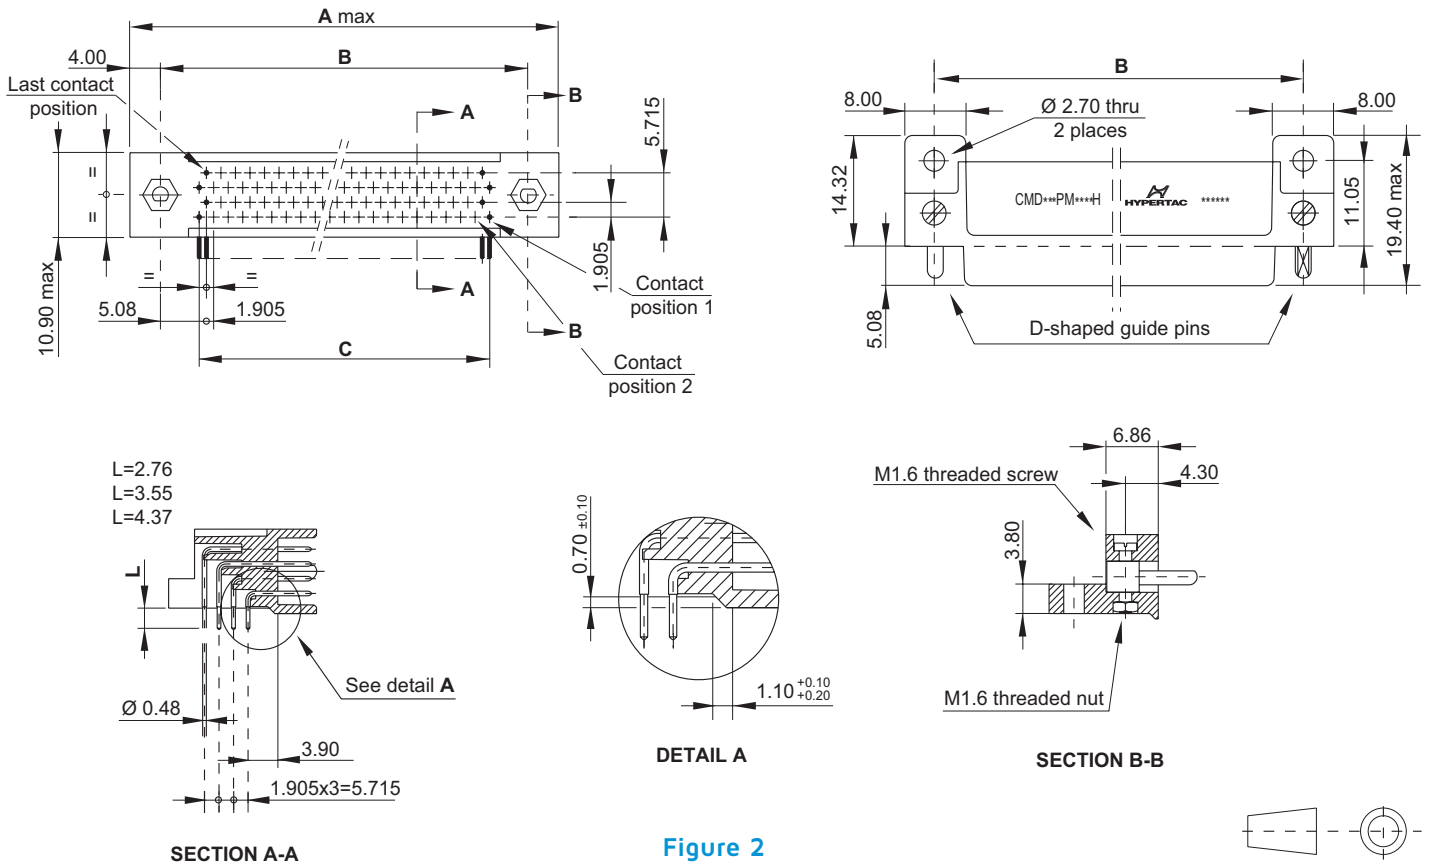


Figure 2

Mounting pattern, daughterboard application, (recommended PCB hole configuration)

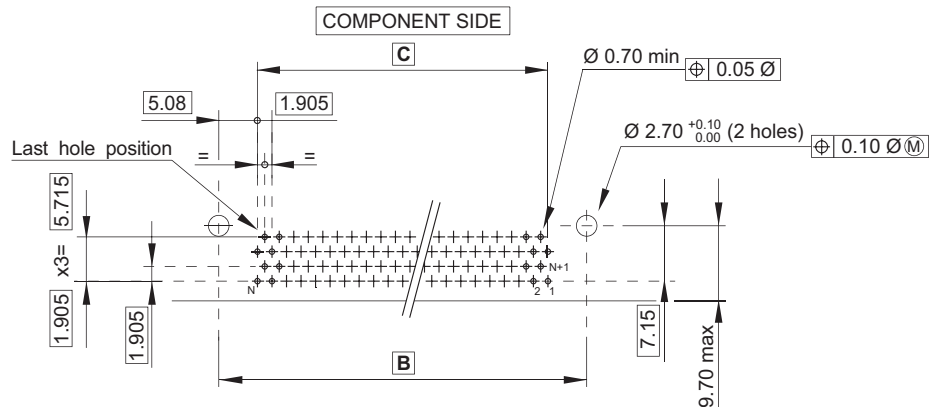


Figure 3

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
42	37.210	29.210	19.050
82	56.260	48.260	38.100
110	69.595	61.595	51.435
126	77.215	69.215	59.055
158	92.455	84.455	74.295
174	100.075	92.075	81.915

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		
	from	to	
42	7.5	8.0	* According to contacts terminal length, and with D-shaped guide pins installed
82	11.0	11.5	
110	13.5	14.0	
126	15.5	16.0	
158	17.5	18.0	
174	19.0	20.0	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These plug connectors are conforming to MIL-DTL-55302.
6. These plug connectors mate CMD***EF***H receptacle connectors, (see pages 17 to 24), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>0 4 2 42 contact positions 0 8 2 82 contact positions 1 1 0 110 contact positions</p> <p>1 2 6 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p>
3 Connector style	P Plug connector
4 Contact style	M Pin contact
5 Contact terminal style	<p><i>Dip solder, right angle, with:</i></p> <p>A .109 inch (2.76 mm) long dip B .140 inch (3.55 mm) long dip</p> <p>C .172 inch (4.37 mm) long dip</p>
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 0 When D-shaped guide pins are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied</p> <p>0 1 to 3 6 When D-shaped guide pins are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide pins, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Plug Connector: 42, 82, 110, 126, 158 and 174 Pin contact positions, .075 inch spacing (1.905 mm), dip Solder (straight) terminal style

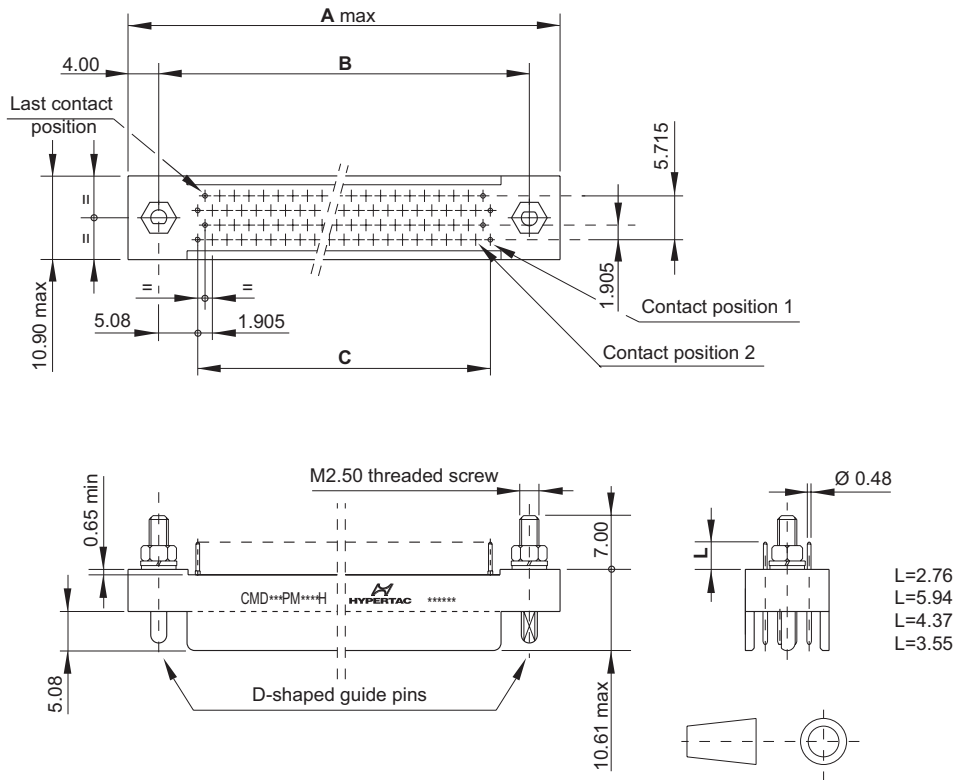


Figure 4

Mounting pattern, in parallel arrangement board-to-board connection, (recommended PCB hole configuration)

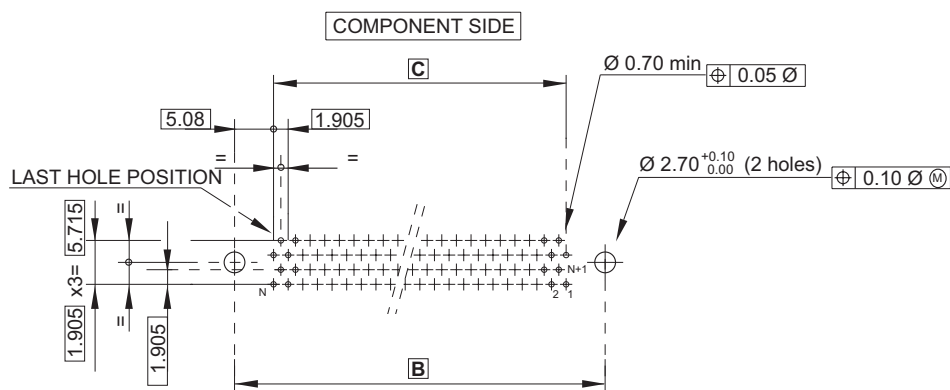


Figure 5

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
42	37.210	29.210	19.050
82	56.260	48.260	38.100
110	69.595	61.595	51.435
126	77.215	69.215	59.055
158	92.455	84.455	74.295
174	100.075	92.075	81.915

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		
	from	to	
42	5.5	6.5	* According to contacts terminal length, and with D-shaped guide pins installed
82	8.0	9.0	
110	9.5	10.5	
126	10.5	11.5	
158	12.0	13.0	
174	13.0	14.0	

NOTES

1. Dimensions for User installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These plug connectors are conforming to MIL-DTL-55302.
6. These plug connectors mate CMD***EF****H receptacle connectors, (see pages 17 to 24), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>0 4 2 42 contact positions 0 8 2 82 contact positions 1 1 0 110 contact positions</p> <p>1 2 6 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p>
3 Connector style	P Plug connector
4 Contact style	M Pin contact
5 Contact terminal style	<p><i>Dip solder, straight thru, with:</i></p> <p>D .109 inch (2.76 mm) long dip E .140 inch (3.55 mm) long dip</p> <p>G .172 inch (4.37 mm) long dip L .234 inch (5.94 mm) long dip</p>
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 1 to 3 6 When D-shaped guide pins are installed in the proper polarized position (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide pins, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Plug Connector: 42, 82, 110, 126, 158 and 174 contact positions, .075 inch spacing (1.905 mm), board package thickness from 1.00 to 4.20 mm

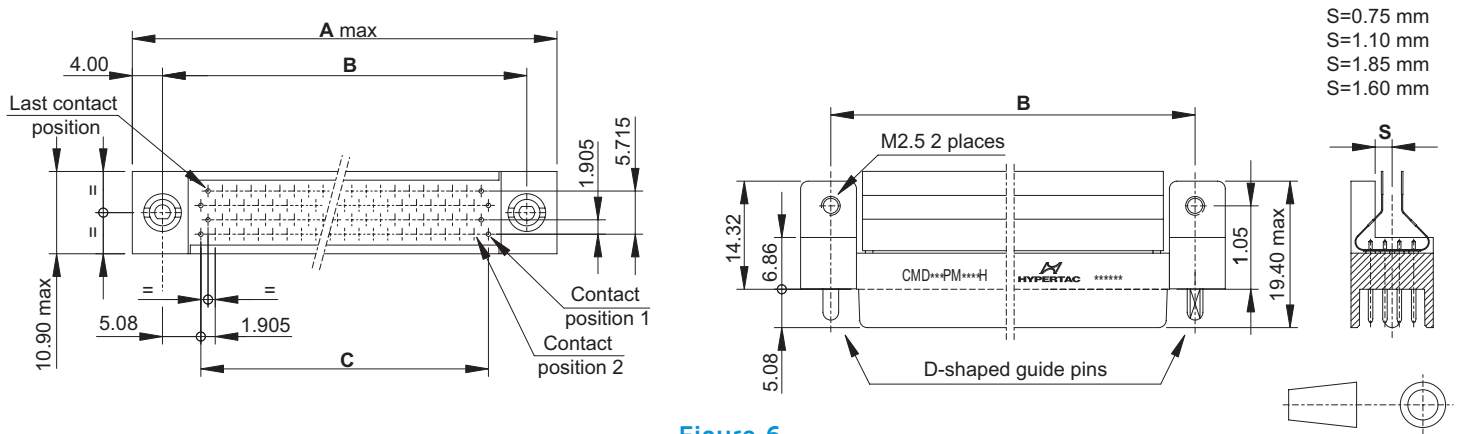


Figure 6

Contact pattern numbering

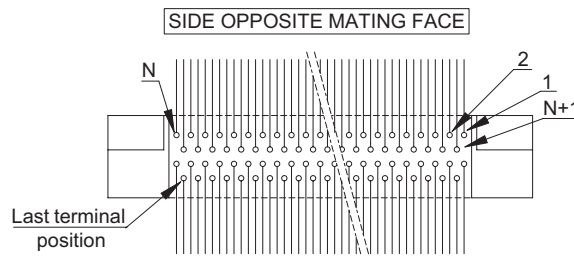


Figure 7

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
42	37.210	29.210	19.050
82	56.260	48.260	38.100
110	69.595	61.595	51.435
126	77.215	69.215	59.055
158	92.455	84.455	74.295
174	100.075	92.075	81.915

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		* According to variations of soldering and insulating compound weight, and with D-shaped guide pins installed
	from	to	
42	8.0	9.0	
82	11.5	12.5	
110	13.5	14.5	
126	15.0	16.0	
158	17.5	18.5	
174	18.5	19.5	

Plug connector:

42, 82, 110, 126, 158 and 174 Pin contact positions

Mounting pattern, daughterboard application

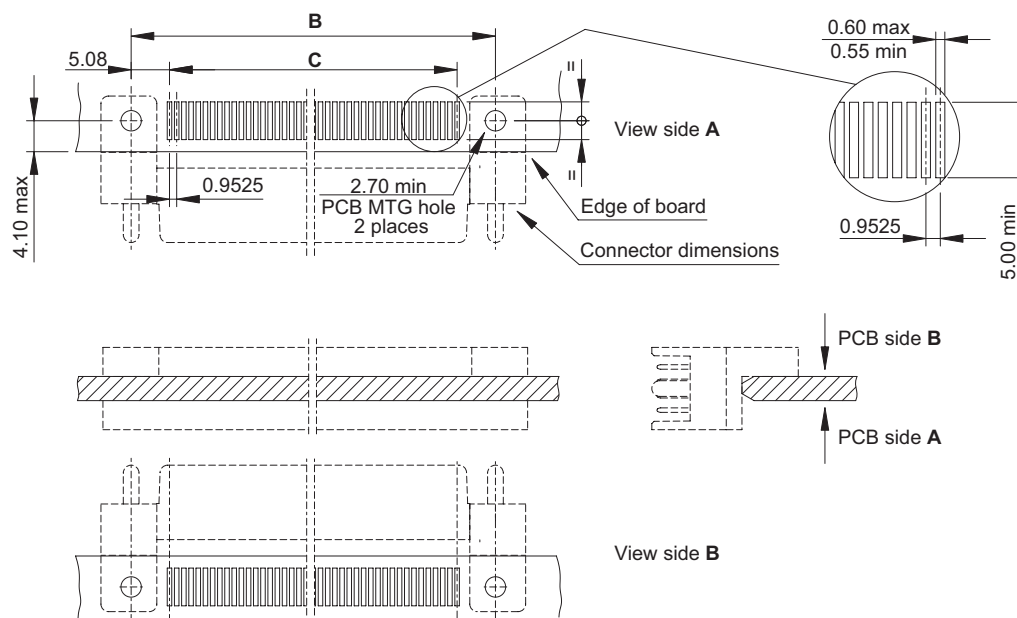


Figure 8

NOTES

1. Dimensions for User installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of the previous page.
4. Materials, finishes and connectors requirements are described into this catalog.
5. These plug connectors are conforming to MIL-DTL-55302, and their flex circuits, as surfacemount tail terminals, are in accordance with MIL-P-50884.
6. These plug connectors mate CMD***EF****H receptacle connectors, (see pages 17 to 24), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of the previous page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family							
2 Connector size	<table border="0"> <tr> <td>0 4 2 42 contact positions</td> <td>0 8 2 82 contact positions</td> <td>1 1 0 110 contact positions</td> </tr> <tr> <td>1 2 6 126 contact positions</td> <td>1 5 8 158 contact positions</td> <td>1 7 4 174 contact positions</td> </tr> </table>	0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions	1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions
0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions					
1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions					
3 Connector style	P Plug connector						
4 Contact style	M Pin contact						
5 Contact terminal style	<p><i>Flex circuit for straddle mount, with board package thickness:</i></p> <p>N from .039 to 0.79 inch (from 1.00 to 2.00 mm)</p> <p>R from .067 to .106 inch (from 1.70 to 2.70 mm)</p> <p>T from .106 to .146 inch (from 2.70 to 3.70 mm)</p> <p>V from .126 to .165 inch (from 3.20 to 4.20 mm)</p>						
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)						
7 Hardware polarization	<p>0 0 When D-shaped guide pins are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>0 1 to 3 6 When D-shaped guide pins are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide pins, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>						
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302						

Receptacle Connector:

42, 82, 110, 126, 158 and 174 Socket contact positions

Receptacle Connector: 42, 82, 110, 126, 158 and 174 Socket contact positions, .075 inch spacing (1.905 mm), dip Solder (straight), and Wire wrap post terminal style

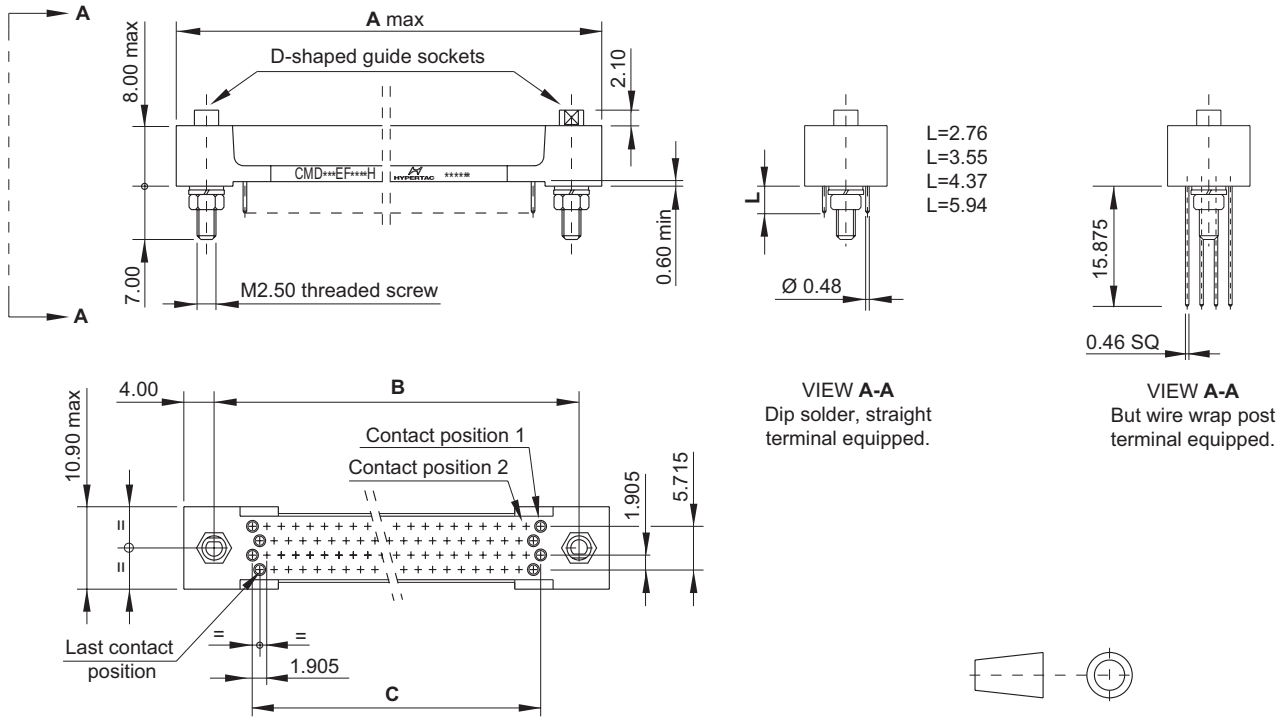


Figure 9

Mounting pattern, motherboard application, (recommended PWB hole configuration)

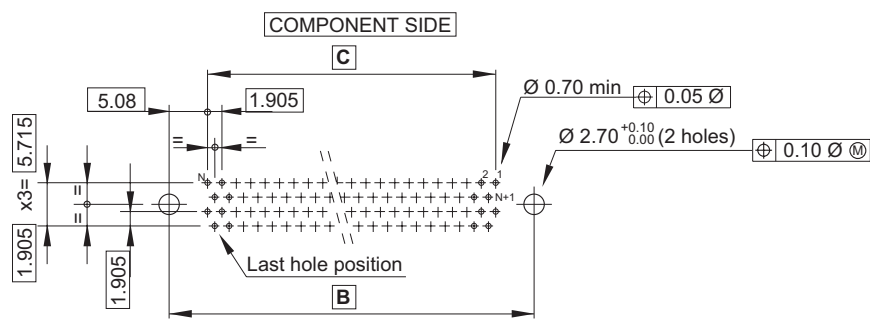


Figure 10

Recommended panel cut-out

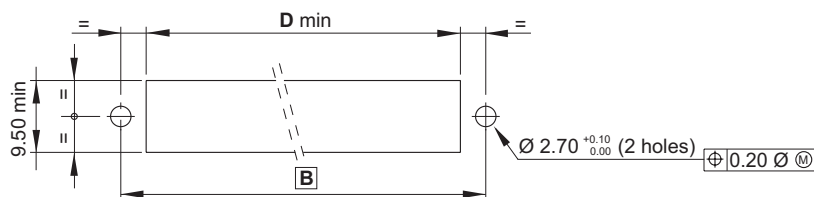


Figure 11

Receptacle Connector:

42, 82, 110, 126, 158 and 174 socket contact positions

Table I

Dimensions in width				
Contact positions	A (mm)	B (mm)	C (mm)	D (mm)
42	37.210	29.210	19.050	22.50
82	56.260	48.260	38.100	41.60
110	69.595	61.595	51.435	54.90
126	77.215	69.215	59.055	62.50
158	92.455	84.455	74.295	77.90
174	100.075	92.075	81.915	85.40

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		* According to contacts terminal length (straight type), and with D-shaped guide socket installed
	from	to	
42	7.5	8.0	
82	11.0	11.5	
110	13.5	14.0	
126	15.5	16.0	
158	17.5	18.0	
174	19.0	20.0	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These receptacle connectors are conforming to MIL-DTL-55302.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 8 to 16), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



E

F



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>0 4 2 42 contact positions 0 8 2 82 contact positions 1 1 0 110 contact positions</p> <p>1 2 6 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p>
3 Connector style	E Receptacle connector
4 Contact style	F Socket contact
5 Contact terminal style	<p><i>Dip solder, straight thru, with:</i></p> <p>D .109 inch (2.76 mm) long dip E .140 inch (3.55 mm) long dip</p> <p>G .172 inch (4.34 mm) long dip L .234 inch (5.94 mm) long dip</p> <p><i>Wire wrap with:</i></p> <p>Y .625 inch (15.875 mm) long post</p>
6 Hardware code	Y D-shaped guide sockets P Universal coupling guide sockets (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 1 to 3 6 When D-shaped guide sockets are installed in the proper polarized position (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Receptacle Connector:

42, 82, 110, 126, 158 and 174 Socket contact positions

Receptacle Connector: 42, 82, 110, 126, 158 and 174 Socket contact positions, .075 inch spacing (1.905 mm), board package thickness from 1.00 to 4.20 mm

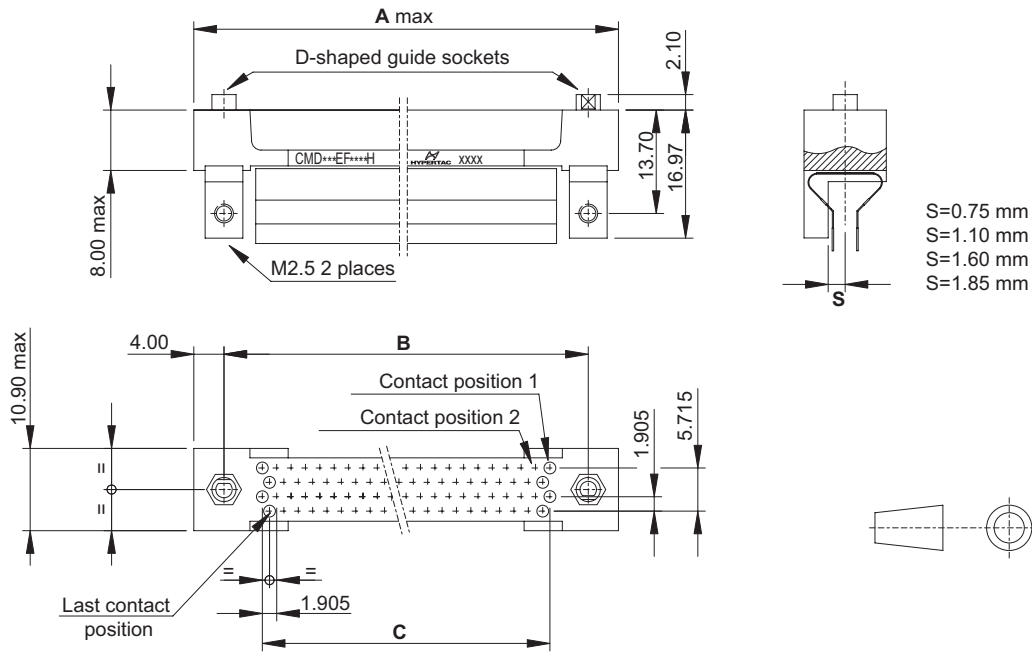


Figure 12

Contact pattern numbering

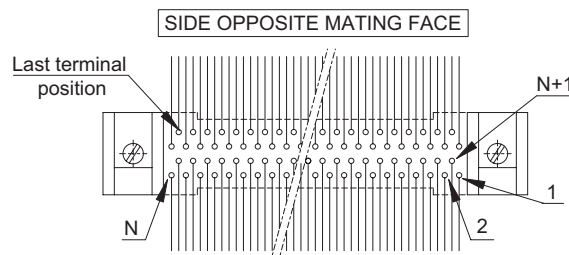


Figure 13

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
42	37.210	29.210	19.050
82	56.260	48.260	38.100
110	69.595	61.595	51.435
126	77.215	69.215	59.055
158	92.455	84.455	74.295
174	100.075	92.075	81.915

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		* According to variations of soldering and insulating compound weight, and with D-shaped guide sockets installed
	from	to	
42	10.5	11.5	
82	14.0	15.0	
110	16.5	17.5	
126	18.5	19.5	
158	20.5	21.5	
174	22.0	23.0	

Receptacle Connector:

42, 82, 110, 126, 158 and 174 Socket contact positions

Mounting pattern, daughterboard application

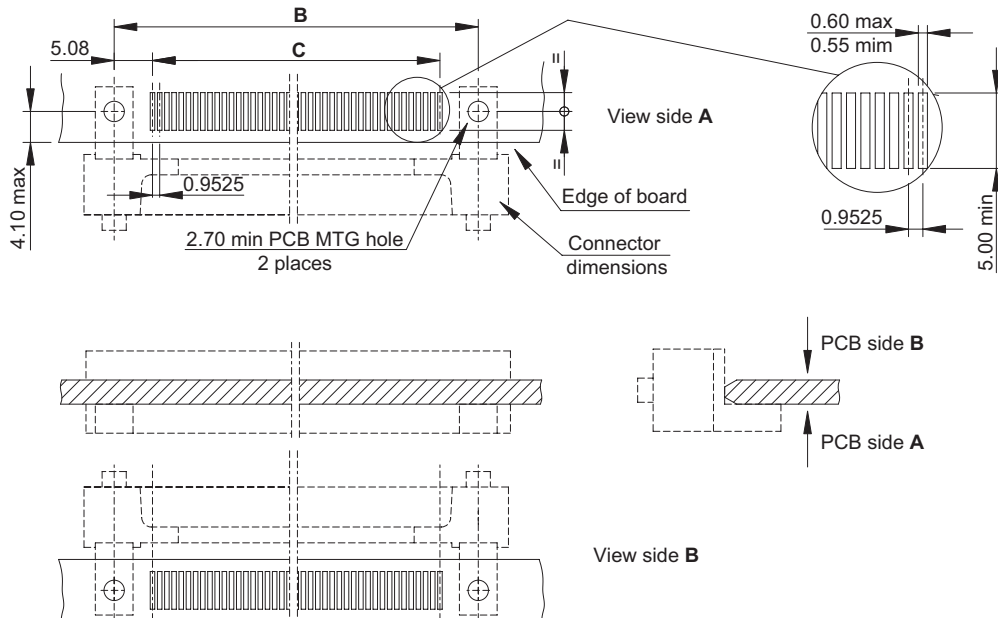


Figure 14

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of the previous page.
4. Materials, finishes and connectors requirements are described into this catalog.
5. These receptacle connectors are conforming to MIL-DTL-55302, and their flex-circuits, as surface mount tail terminals, are in accordance with MIL-P-50884.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 8 to 16), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of the previous page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



E

F



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>0 4 2 42 contact positions 0 8 2 82 contact positions 1 1 0 110 contact positions</p> <p>Check firm 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p>
3 Connector style	E Receptacle connector
4 Contact style	F Socket contact
5 Contact terminal style	<p><i>Flex circuit for straddle mount, with board package thickness:</i></p> <p>N from .039 to 0.79 inch (from 1.00 to 2.00 mm)</p> <p>R from .067 to .106 inch (from 1.70 to 2.70 mm)</p> <p>T from .106 to .146 inch (from 2.70 to 3.70 mm)</p> <p>V from .126 to .165 inch (from 3.20 to 4.20 mm)</p>
6 Hardware code	Y D-shaped guide sockets P Universal coupling guide sockets (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 0 When D-shaped guide sockets are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>0 1 to 3 6 When D-shaped guide sockets are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Receptacle Connector:

42, 82, 110, 126, 158 and 174 Socket contact positions

Receptacle Connector: 42, 82, 110, 126, 158 and 174 Socket contact positions, .075 inch spacing (1.905 mm), dip Solder (right angle) terminal style

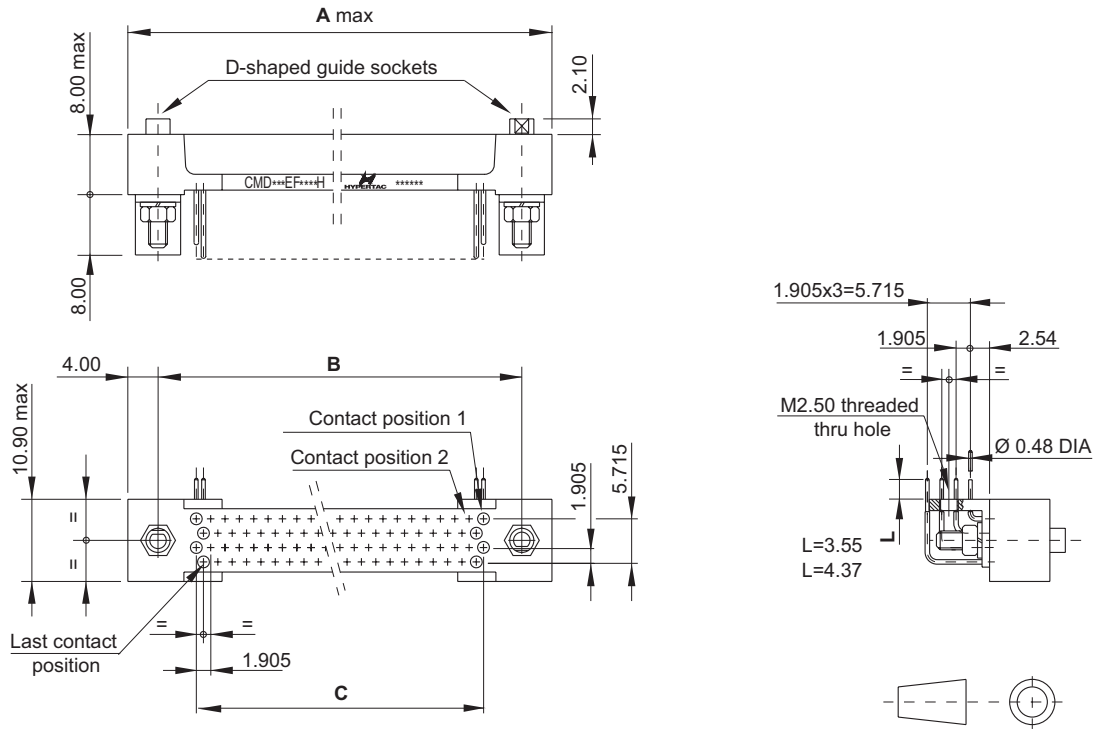


Figure 15

Mounting pattern, extender board and in line board-to-board applications, (recommended PCB hole configuration)

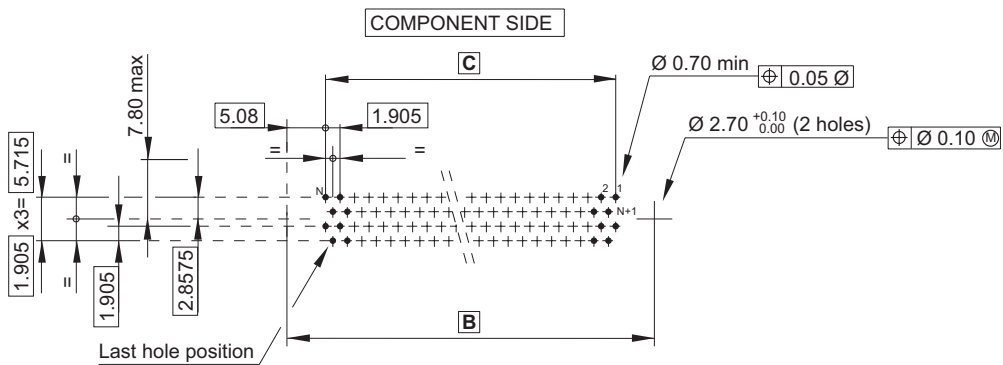


Figure 16

Receptacle Connector:

42, 82, 110, 126, 158 and 174 Socket contact positions

Table I

Dimensions in width				
Contact positions	A (mm)	B (mm)	C (mm)	D (mm)
42	37.210	29.210	19.050	22.50
82	56.260	48.260	38.100	41.60
110	69.595	61.595	51.435	54.90
126	77.215	69.215	59.055	62.50
158	92.455	84.455	74.295	77.90
174	100.075	92.075	81.915	85.40

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		* According to contacts terminal length and with D-shaped guide sockets installed
	from	to	
42	10.0	11.0	
82	14.0	15.0	
110	17.0	18.0	
126	19.0	20.0	
158	23.0	24.5	
174	24.0	25.5	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These receptacle connectors are conforming to MIL-DTL-55302.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 8 to 16), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



E

F



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>0 4 2 42 contact positions 0 8 2 82 contact positions 1 1 0 110 contact positions</p> <p>1 2 6 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p>
3 Connector style	E Receptacle connector
4 Contact style	F Socket contact
5 Contact terminal style	<p><i>Dip solder, right angle, with:</i></p> <p>B .140 inch (3.55 mm) long dip C .172 inch (4.37 mm) long dip</p>
6 Hardware code	Y D-shaped guide sockets P Universal coupling guide sockets (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 0 When D-shaped guide sockets are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>0 1 to 3 6 When D-shaped guide sockets are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Plug Connector:

220, 236 and 316 Pin contact positions

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		* According to contacts terminal length and with D-shaped guide pins installed
	from	to	
220	25.0	26.0	
236	26.5	28.0	
316	33.5	36.0	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These plug connectors are conforming to MIL-DTL-55302.
6. These plug connectors mate CMD***EF***H receptacle connectors, (see pages 35 to 43), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	2 2 0 220 contact positions 2 3 6 236 contact positions 3 1 6 316 contact positions
3 Connector style	P Plug connector
4 Contact style	M Pin contact
5 Contact terminal style	<i>Dip solder, right angle, with:</i> A .109 inch (2.76 mm) long dip B .140 inch (3.55 mm) long dip C .172 inch (4.37 mm) long dip
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)
7 Hardware polarization	0 0 When D-shaped guide pins are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied. 0 1 to 3 6 When D-shaped guide pins are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>) 3 7 When universal coupling guide pins, (<i>for test type connectors</i>), are installed 3 8 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Plug Connector:

220, 236 and 316 Pin contact positions

Plug Connector: 220, 236 and 316 Pin contact positions, .075 inch spacing (1.905 mm), dip Solder (straight) terminal style

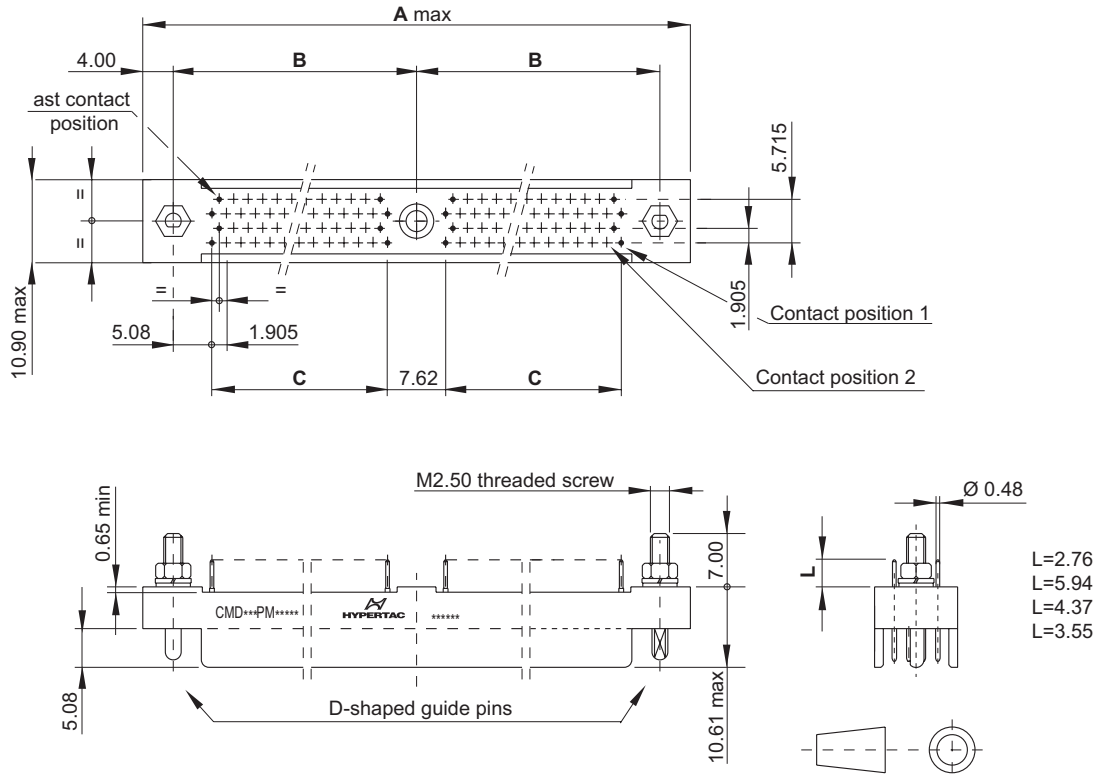


Figure 19

Mounting pattern, in parallel arrangement board-to-board connection, (recommended PCB hole configuration)

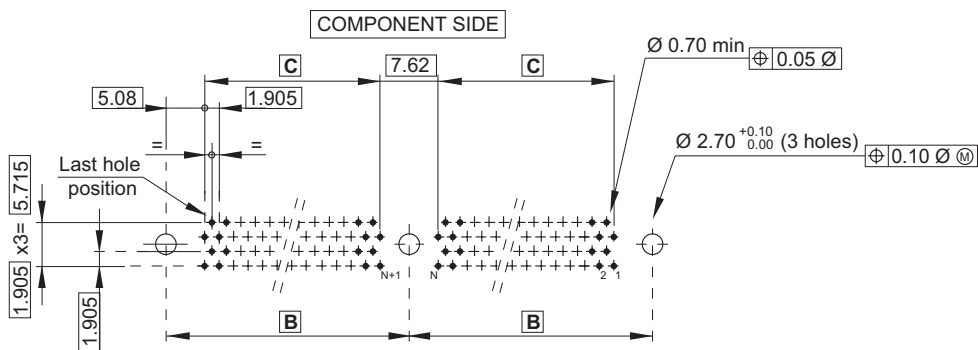


Figure 20

Plug Connector:

220, 236 and 316 Pin contact positions

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		* According to contacts terminal length and with D-shaped guide pins installed
	from	to	
220	17.5	18.5	
236	18.5	19.5	
316	23.5	24.5	

NOTES

1. Dimensions for User installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These plug connectors are conforming to MIL-DTL-55302.
6. These plug connectors mate CMD***EF***H receptacle connectors, (see pages 35 to 43), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	Check firm 220 contact positions Check firm 236 contact positions Check firm 316 contact positions
3 Connector style	P Plug connector
4 Contact style	M Pin contact
5 Contact terminal style	<i>Dip solder, straight thru, with:</i> D .109 inch (2.76 mm) long dip E .140 inch (3.55 mm) long dip G .172 inch (4.37 mm) long dip L .234 inch (5.94 mm) long dip
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)
7 Hardware polarization	0 1 to 3 6 When D-shaped guide pins are installed in the proper polarized position (<i>see polarization configuration chart on page 44</i>) 3 7 When universal coupling guide pins, (<i>for test type connectors</i>), are installed 3 8 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Plug Connector:

220, 236 and 316 Pin contact positions

Plug Connector: 220, 236 and 316 Pin contact positions, .075 inch spacing (1.905 mm), board package thickness from 1.00 to 4.20 mm

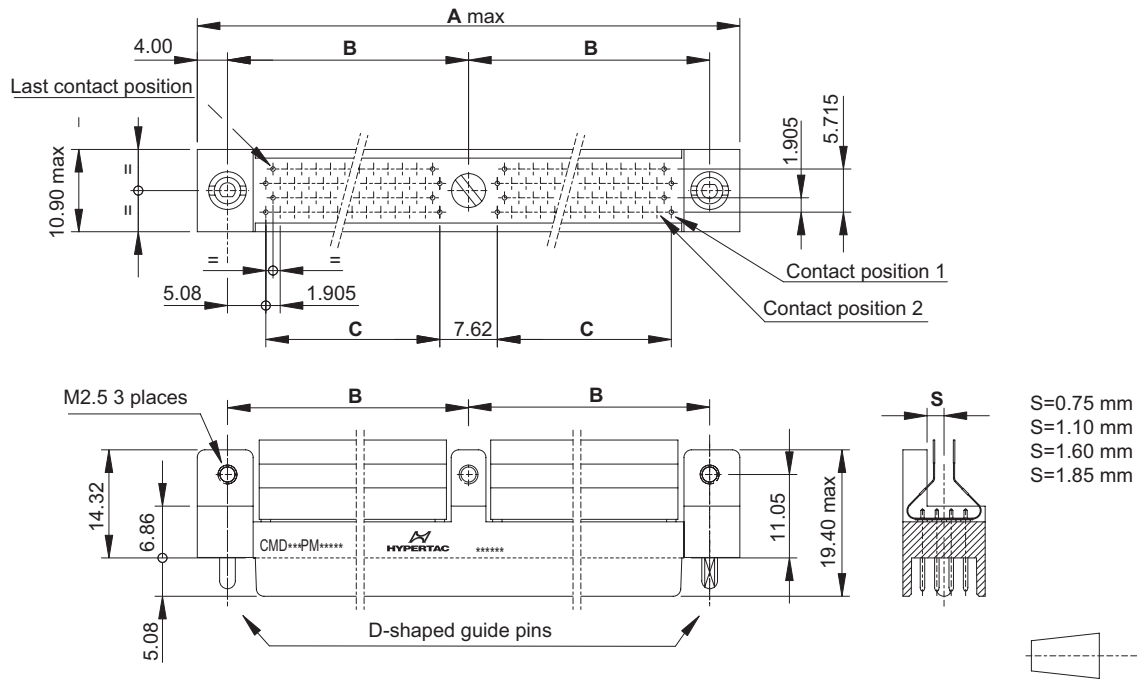


Figure 21

Contact pattern numbering

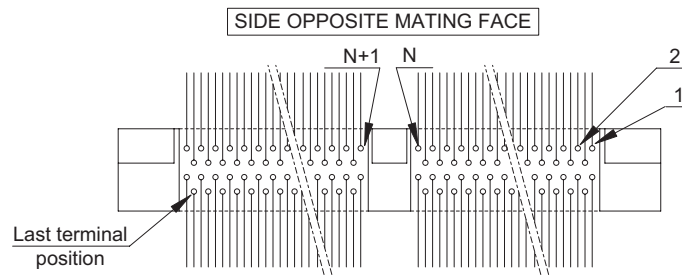


Figure 22

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		* According to variations of soldering and insulating compound weight, and with D-shaped guide pins installed
	from	to	
220	25.5	26.5	
236	27.0	28.0	
316	35.0	36.0	

Plug Connector:

220, 236 and 316 Pin contact positions

Mounting pattern, daughterboard application

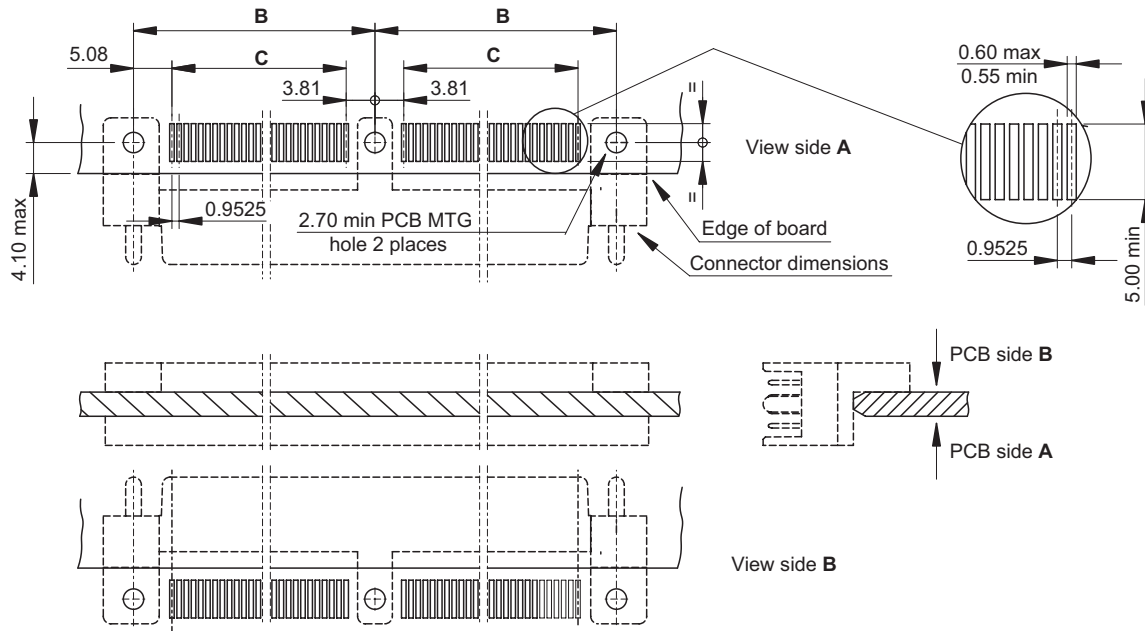


Figure 23

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of the previous page.
4. Materials, finishes and connectors requirements are described into this catalog.
5. These plug connectors are conforming to MIL-DTL-55302, and their flex circuits, as surface mount tail terminals, are in accordance with MIL-P-50884.
6. These plug connectors mate CMD***EF***H receptacle connectors, (see pages 35 to 43), when both of them, (plug and receptacle), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of the previous page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



P

M



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>Check firm 220 contact positions 2 3 6 236 contact positions</p> <p>3 1 6 316 contact positions</p>
3 Connector style	P Plug connector
4 Contact style	M Pin contact
5 Contact terminal style	<p><i>Flex circuit straddle mount, with board package thickness:</i></p> <p>N from .039 to 0.79 inch (from 1.00 to 2.00 mm)</p> <p>R from .067 to .106 inch (from 1.70 to 2.70 mm)</p> <p>T from .106 to .146 inch (from 2.70 to 3.70 mm)</p> <p>V from .126 to .165 inch (from 3.20 to 4.20 mm)</p>
6 Hardware code	Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)
7 Hardware polarization	<p>00 When D-shaped guide pins are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>01 to 36 When D-shaped guide pins are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>37 When universal coupling guide pins, (<i>for test type connectors</i>), are installed</p> <p>38 When D-shaped guide pins or universal coupling guide pins (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Receptacle Connector: 220, 236 and 316 Socket contact positions

Receptacle Connector: 220, 236 and 316 Socket contact positions, .075 inch spacing (1.905 mm), dip Solder (straight) and Wire wrap post terminal style

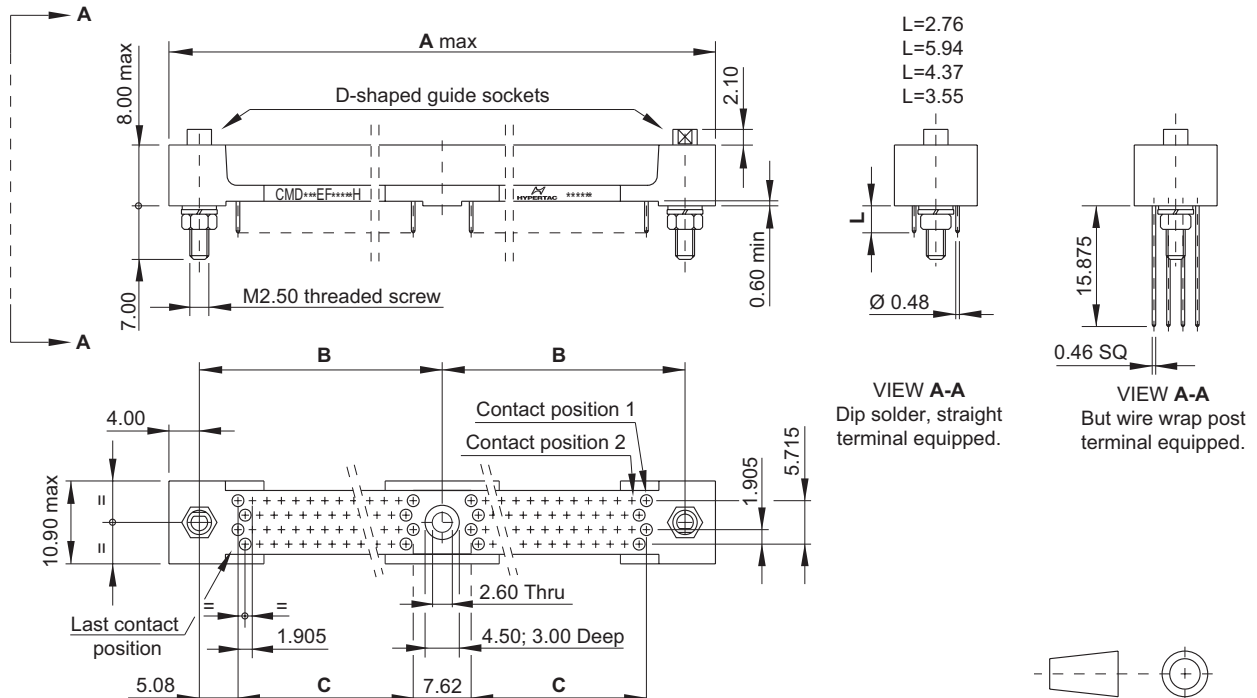


Figure 24

Mounting pattern, motherboard application, (recommended pwb hole configuration)

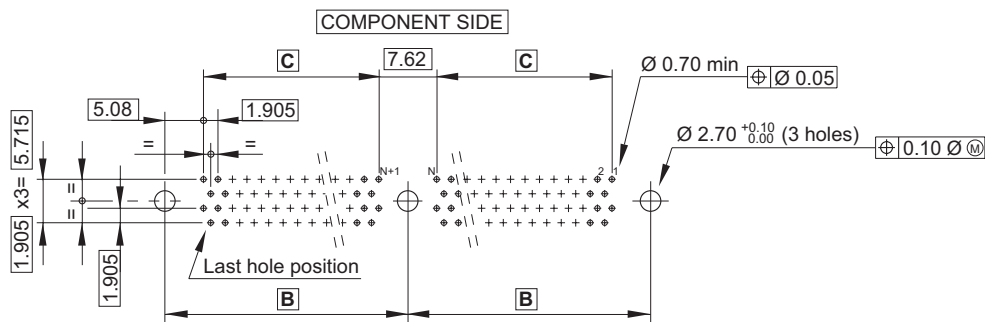


Figure 25

Recommended panel cut-out

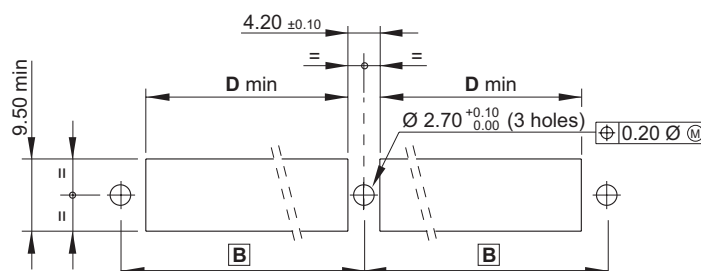


Figure 26

Receptacle Connector:

220, 236 and 316 Socket contact positions

Table I

Dimensions in width				
Contact positions	A (mm)	B (mm)	C (mm)	D (mm)
220	128.650	60.325	51.435	54.90
236	136.270	64.135	55.245	58.70
316	174.370	83.185	74.295	77.70

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		* According to contacts terminal length (straight type), and with D-shaped guide sockets installed
	from	to	
220	24.0	26.0	
236	25.5	27.5	
316	33.5	36.0	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These receptacle connectors are conforming to MIL-DTL-55302.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 26 to 34), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD

1



2

E

3

F

4



5



6



7

H

8

1 Connector family	
2 Connector size	2 2 0 220 contact positions 2 3 6 236 contact positions 3 1 6 316 contact positions
3 Connector style	E Receptacle connector
4 Contact style	F Socket contact
5 Contact terminal style	<p><i>Dip solder, straight thru, with:</i></p> <p>D .109 inch (2.76 mm) long dip E .140 inch (3.55 mm) long dip</p> <p>G .172 inch (4.37 mm) long dip L .234 inch (5.94 mm) long dip</p> <p><i>Wire wrap with:</i></p> <p>Y .625 inch (15.875 mm) long post</p>
6 Hardware code	Y D-shaped guide sockets P Universal coupling guide sockets (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 1 to 3 6 When D-shaped guide sockets are installed in the proper polarized position (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Receptacle Connector:

220, 236 and 316 Socket contact positions

Receptacle Connector: 220, 236 and 316 Socket contact positions, .075 inch spacing (1.905 mm), board package thickness from 1.00 to 4.20 mm

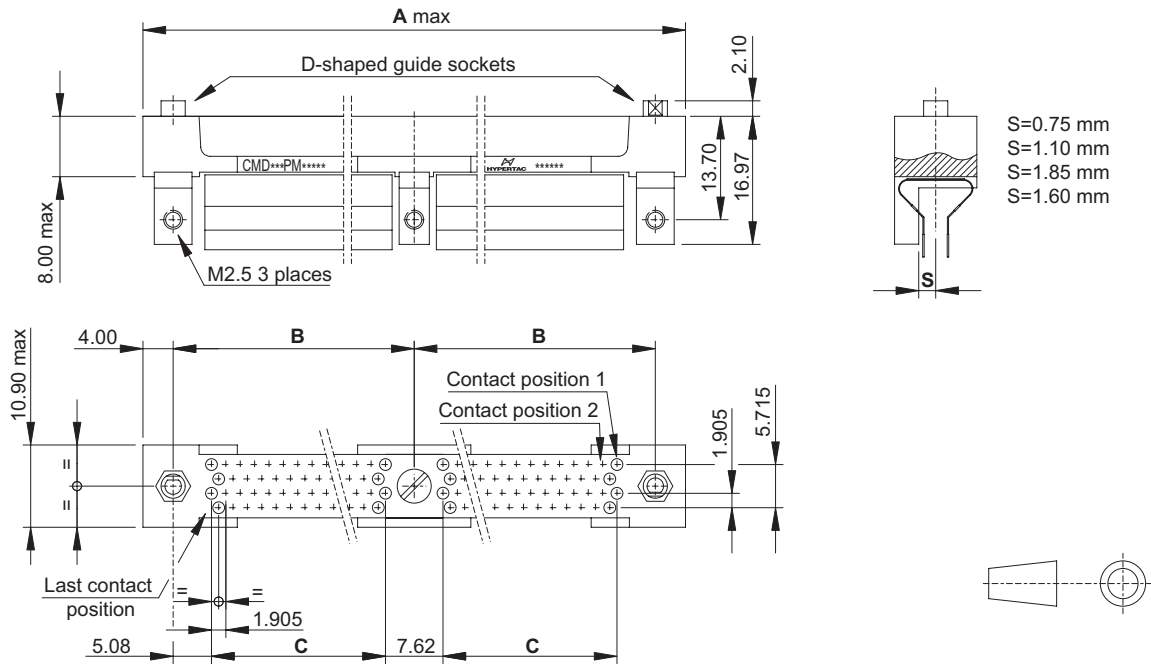


Figure 27

Contact pattern numbering

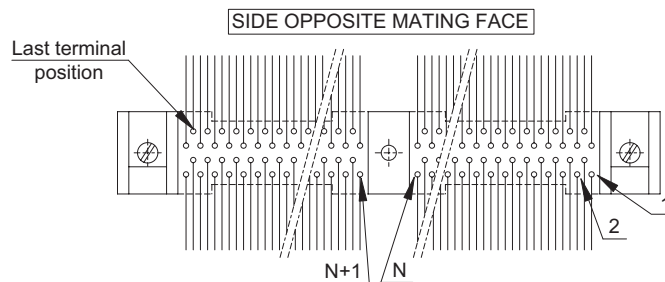


Figure 28

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Table II

Contact positions	Weight* in grams (with g=9.81 m/s ²)		* According to variations of soldering and insulating compound weight, and with D-shaped guide sockets installed
	from	to	
220	30.5	31.5	
236	32.0	33.0	
316	40.5	41.5	

Receptacle Connector:

220, 236 and 316 Socket contact positions

Mounting pattern, daughterboard application

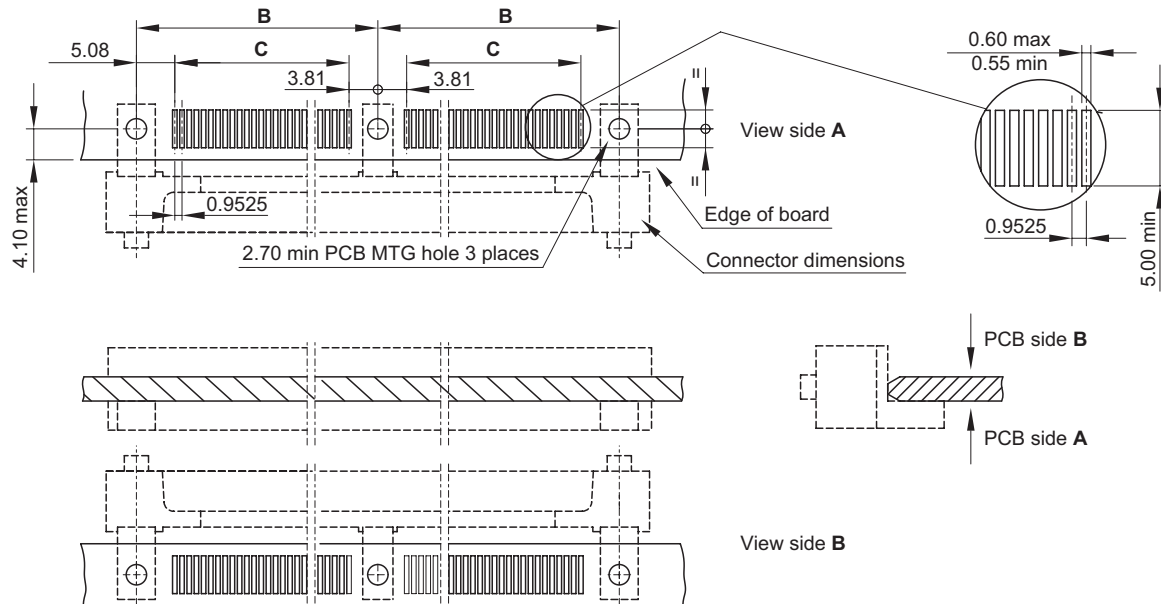


Figure 29

NOTES

1. Dimensions for user installation purpose only .
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of the previous page.
4. Materials, finishes and connectors requirements are described into this catalog.
5. These receptacle connectors are conforming to MIL-DTL-55302, and their flex-circuits, as surface mount tail terminals, are in accordance with MIL-P-50884.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 26 to 34), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of the previous page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



E

F



H

1

2

3

4

5

6

7

8

1 Connector family	
2 Connector size	<p>Check firm 220 contact positions 2 3 6 236 contact positions</p> <p>3 1 6 316 contact positions</p>
3 Connector style	<p>E Receptacle connector</p>
4 Contact style	<p>F Socket contact</p>
5 Contact terminal style	<p><i>Flex circuit straddle mount, with board package thickness:</i></p> <p>N from .034 to 0.08 inch (from 1.00 to 2.00 mm)</p> <p>R from .007 to .106 inch (from 1.70 to 2.70 mm)</p> <p>T from .106 to .146 inch (from 2.70 to 3.70 mm)</p> <p>V from .126 to .165 inch (from 3.20 to 4.20 mm)</p>
6 Hardware code	<p>Y D-shaped guide pins P Universal coupling guide pins (<i>for test type connectors</i>)</p>
7 Hardware polarization	<p>00 When D-shaped guide sockets are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>01 to 36 When D-shaped guide sockets are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>37 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>38 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	<p>H Contacts with plating and underplating conforming to MIL-DTL-55302</p>

Receptacle Connector: 220, 236 and 316 Socket contact positions

Receptacle Connector: 220, 236 and 316 Socket contact positions, .075 inch spacing (1.905 mm), dip Solder (right angle) terminal style

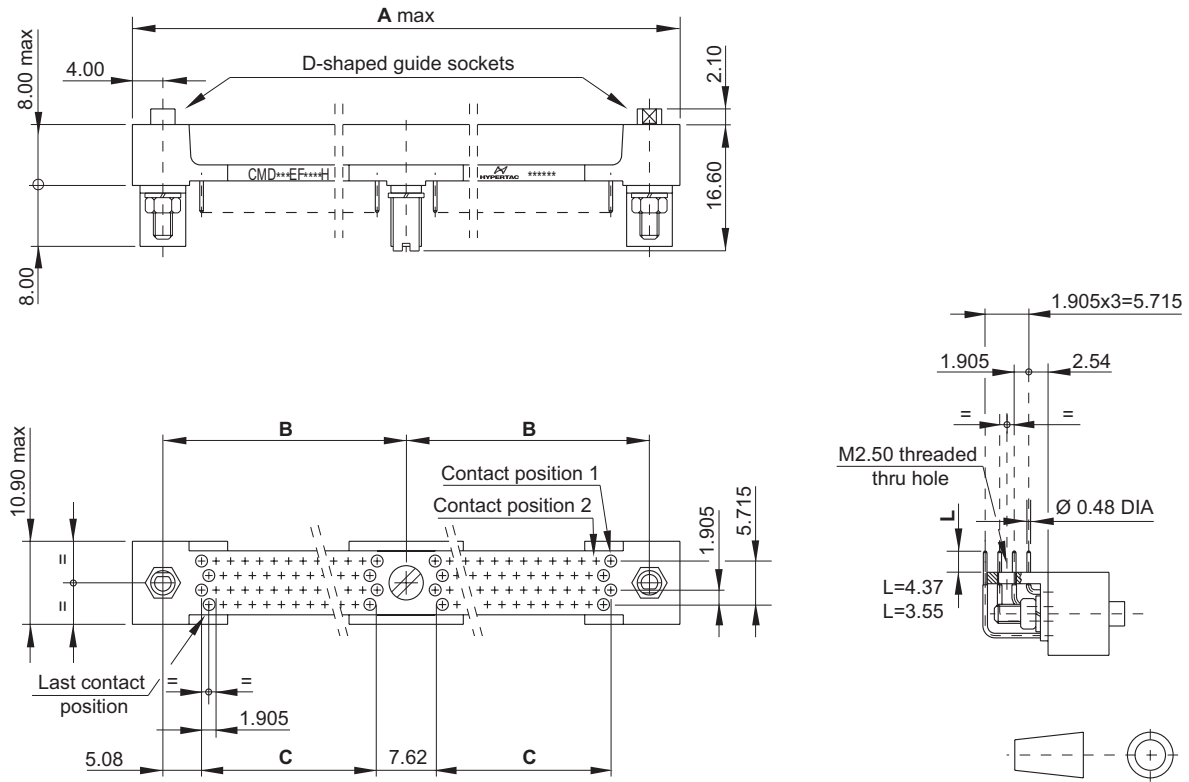


Figure 30

Mounting pattern, extender board and inline board-to-board applications, (recommended pcb hole configuration)

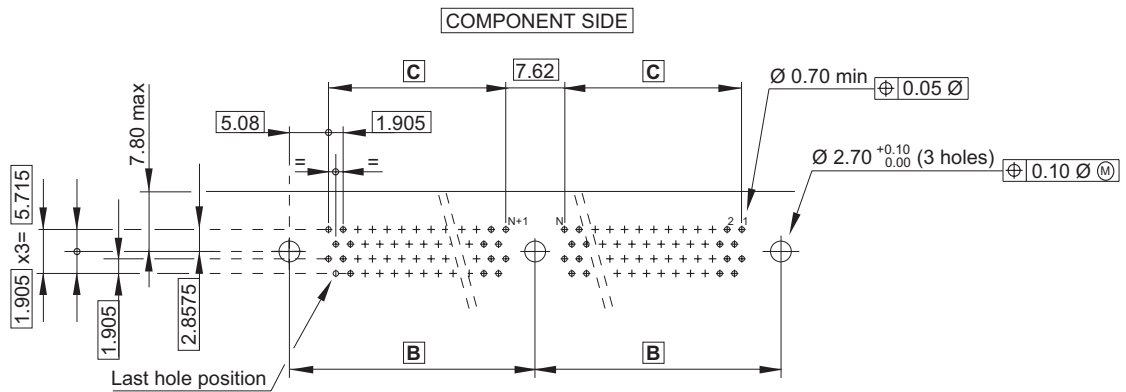


Figure 31

Receptacle Connector:

220, 236 and 316 socket contact positions

Table I

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Table II

Contact positions	Weight* in grams (with $g=9.81 \text{ m/s}^2$)		* According to contacts terminal length, and with D-shaped guide sockets installed
	from	to	
220	31.5	33.0	
236	33.5	35.0	
316	42.0	44.0	

NOTES

1. Dimensions for user installation purpose only.
2. Dimensions are in millimeters.
3. Dimensions in width of these connectors are specified in the table I of this page.
4. Materials, finishes and connectors requirements are described into this catalog. Hot solder dipping, as dip solder terminal end finishing, is available at Customer request, (please consult the Factory).
5. These receptacle connectors are conforming to MIL-DTL-55302.
6. These receptacle connectors mate CMD***PM***H plug connectors, (see pages 26 to 34), when both of them, (receptacle and plug), are equipped with the same contact positions number, appropriate hardware, and identical polarizing combination.
7. Weights of these connectors are specified in the table II of this page.
8. Connectors for measuring and test devices, (i.e. extender board applications), are indicated on pages 53 to 58.

How To Order



CMD



E

F



H

1

2

3

4

5

6

7


8

1 Connector family	
2 Connector size	<p>2 2 0 220 contact positions 2 3 6 236 contact positions</p> <p>3 1 6 316 contact positions</p>
3 Connector style	E Receptacle connector
4 Contact style	F Socket contact
5 Contact terminal style	<p><i>Dip solder, right angle, with:</i></p> <p>B .140 inch (3.55 mm) long dip C .172 inch (4.37 mm) long dip</p>
6 Hardware code	Y D-shaped guide socket P Universal coupling guide socket (<i>for test type connectors</i>)
7 Hardware polarization	<p>0 0 When D-shaped guide sockets are installed in the O1 polarized position, (<i>see polarization configuration chart on page 44</i>), without Loctite 242 applied.</p> <p>0 1 to 3 6 When D-shaped guide sockets are installed in the proper polarized position and Loctite 242 is applied to the threads, (<i>see polarization configuration chart on page 44</i>)</p> <p>3 7 When universal coupling guide sockets, (<i>for test type connectors</i>), are installed</p> <p>3 8 When D-shaped guide sockets or universal coupling guide sockets (<i>for test type connectors</i>), are shipped loose in a plastic bag</p>
8 Contact finishing	H Contacts with plating and underplating conforming to MIL-DTL-55302

Polarization configuration chart

D-shaped guide sets


When connector is equipped with D-shaped guide hardware, any of the following polarization numbers are used, polarizing hardware will be oriented per this chart. Use appropriate number as shown, (designation 01 to 36 incl).

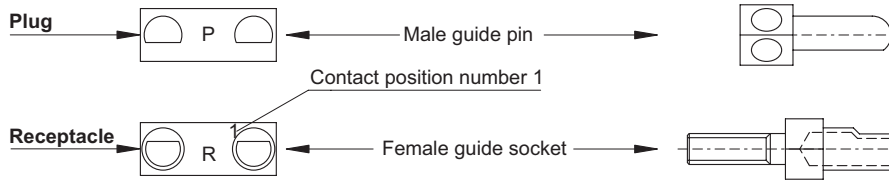

01	07	13	19	25	31
02	08	14	20	26	32
03	09	15	21	27	33
04	10	16	22	28	34
05	11	17	23	29	35
06	12	18	24	30	36

NOTES

1. It is recommended that the following polarization positions be chosen first: 01, 08, 15, 22, 29, and 36.
2. Universal coupling guide sets, (designation 37)

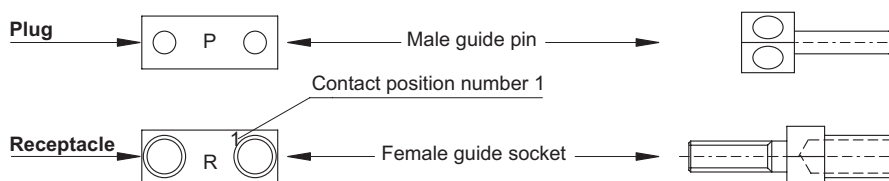

Maximum dimensions of mated connectors

Maximum dimensions of mated connectors.

Plug connector dip solder (right angle) terminals se equipped, and receptacle connector dip solder (straight), or wire wrap post terminals equipped

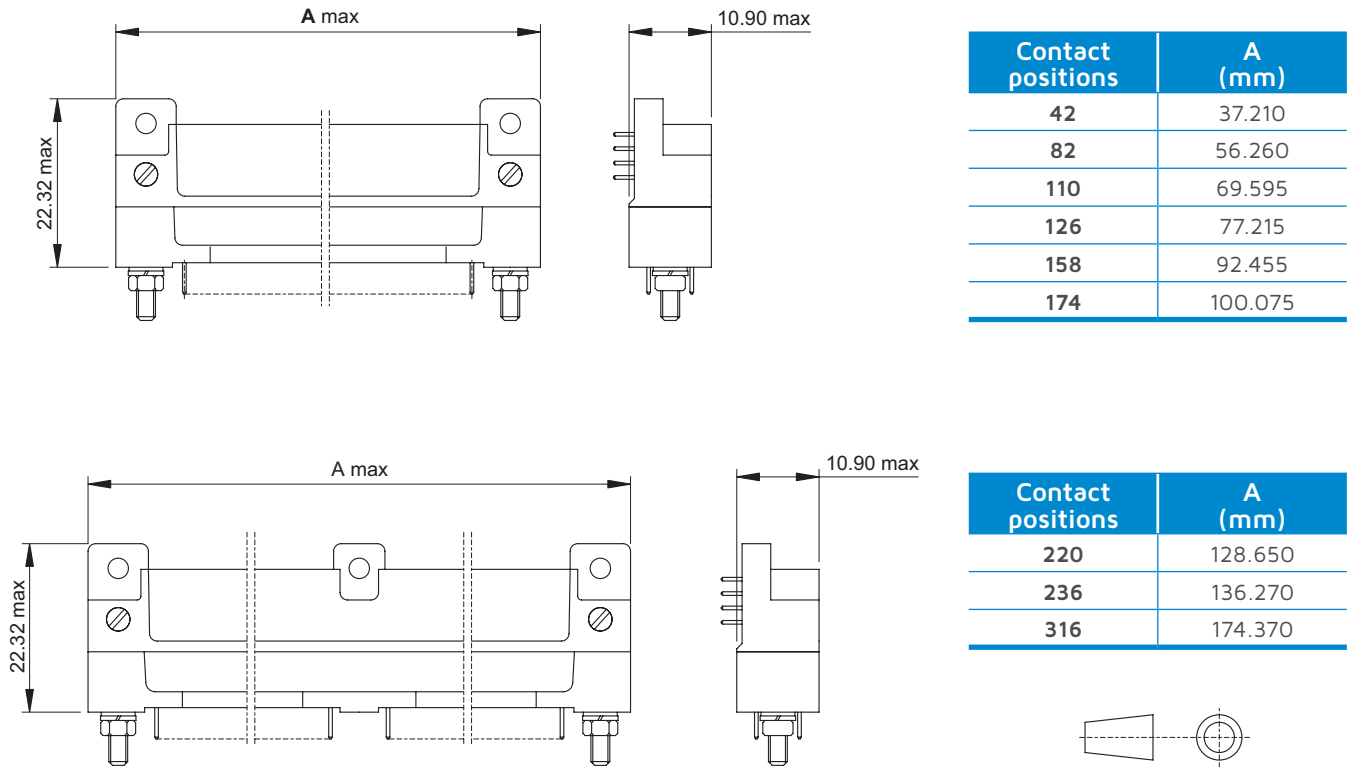


Figure 32

Maximum dimensions of mated connectors

Maximum dimensions of mated connectors.

Plug and receptacle connectors dip solder (right angle), terminals equipped


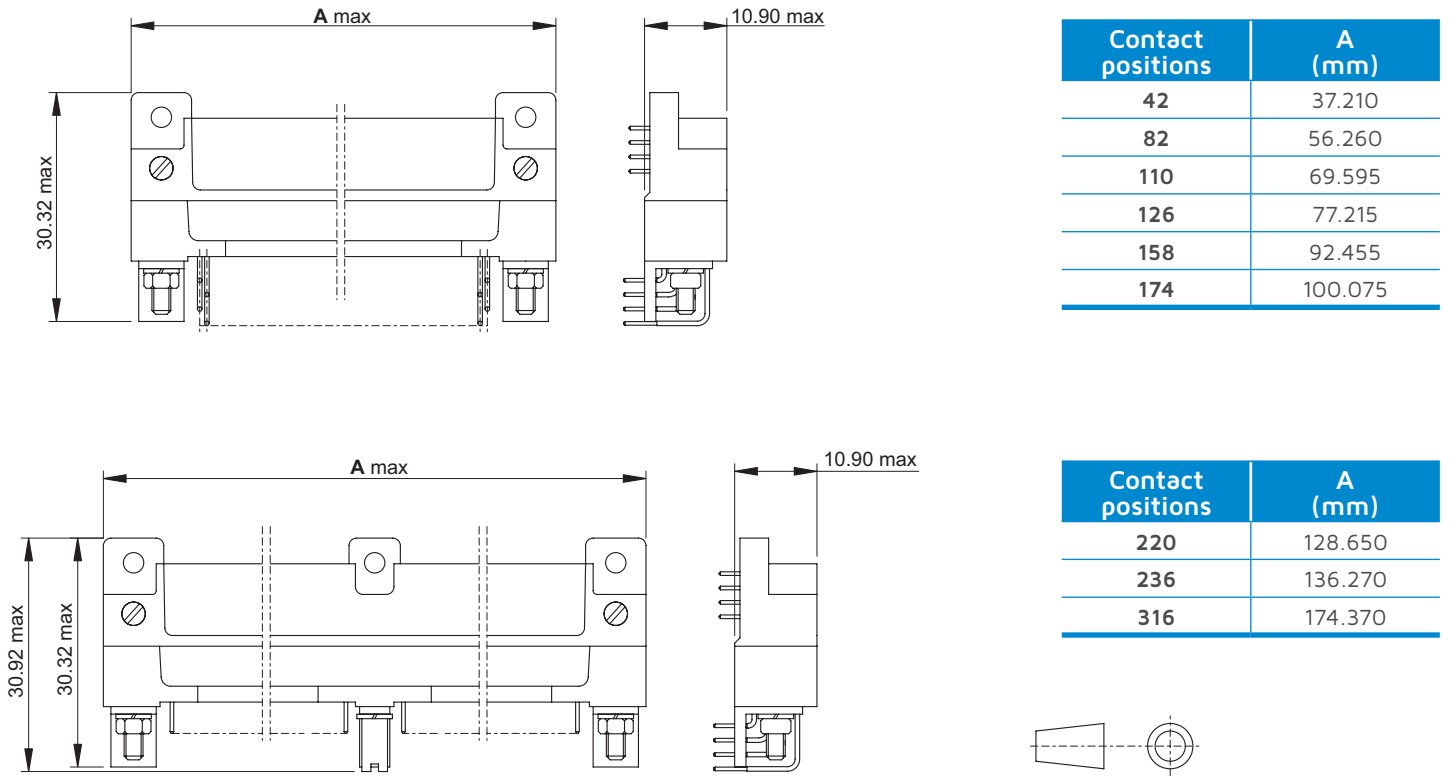



Figure 33

Maximum dimensions of mated connectors

Maximum dimensions of mated connectors.
Plug and receptacle connectors dip solder (straight), terminals equipped

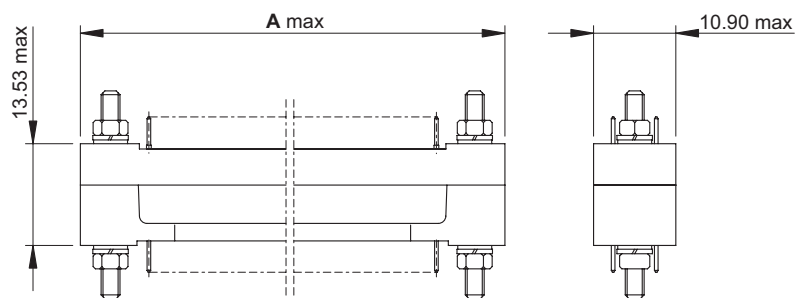

Contact positions	A (mm)
42	37.210
82	56.260
110	69.595
126	77.215
158	92.455
174	100.075

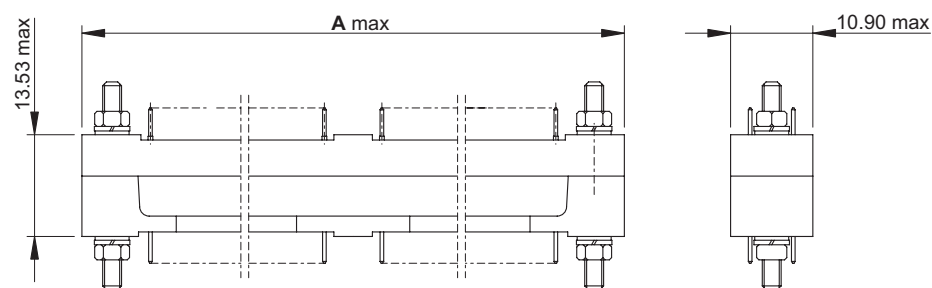

Contact positions	A (mm)
220	128.650
236	136.270
316	174.370





Figure 34

Maximum dimensions of mated connectors

Maximum dimensions of mated connectors.
Plug connector surface mount tail terminals equipped
and receptacle connector dip solder (straight), terminals equipped

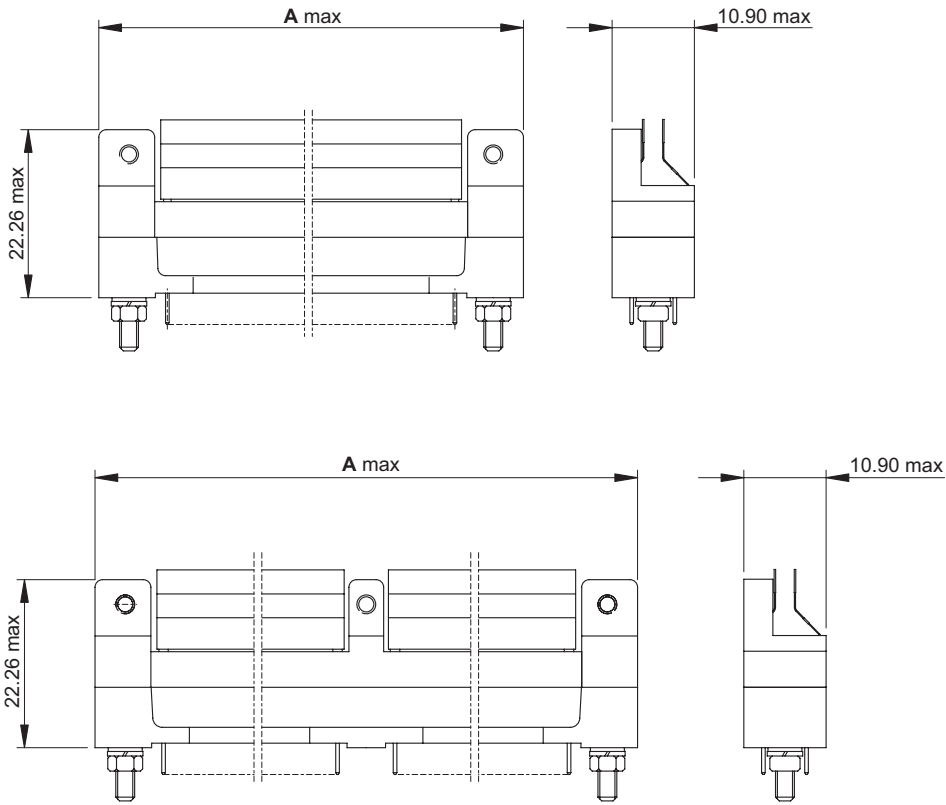

Contact positions	A (mm)
42	37.210
82	56.260
110	69.595
126	77.215
158	92.455
174	100.075

Contact positions	A (mm)
220	128.650
236	136.270
316	174.370





Figure 35

Maximum dimensions of mated connectors

Maximum dimensions of mated connectors.
Plug and receptacle connectors surface mount tail terminals equipped

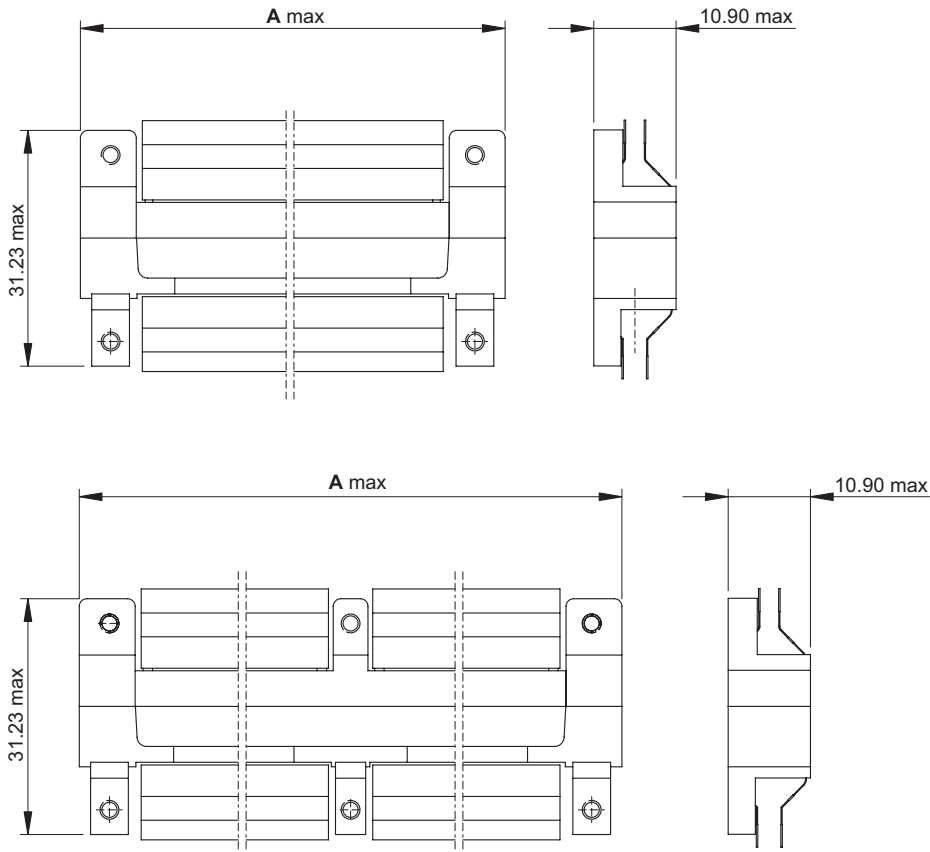

Contact positions	A (mm)
42	37.210
82	56.260
110	69.595
126	77.215
158	92.455
174	100.075

Contact positions	A (mm)
220	128.650
236	136.270
316	174.370






Figure 36

The connector halves mating

Maximum permissible inclination, in longitudinal and in transversal axis, of the connector halves, in order to ensure the acceptable electrical engagement made by all contacts

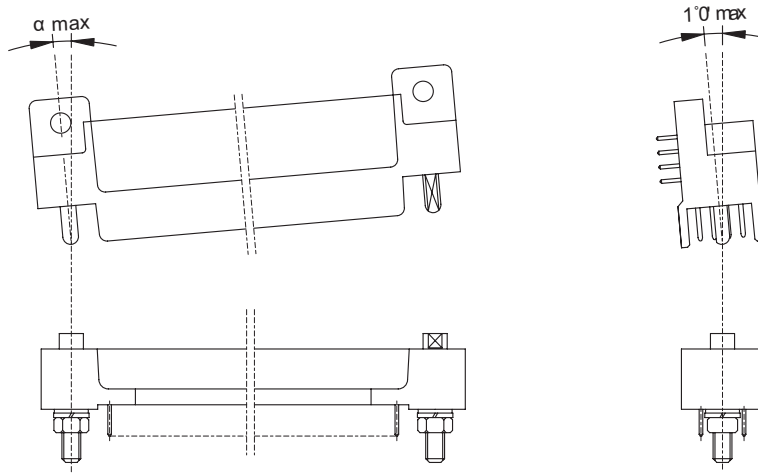

$\alpha = 0^{\circ} 25'$ for connectors equipped with 42, 82, 110, 126, 158 or 174 contact positions.

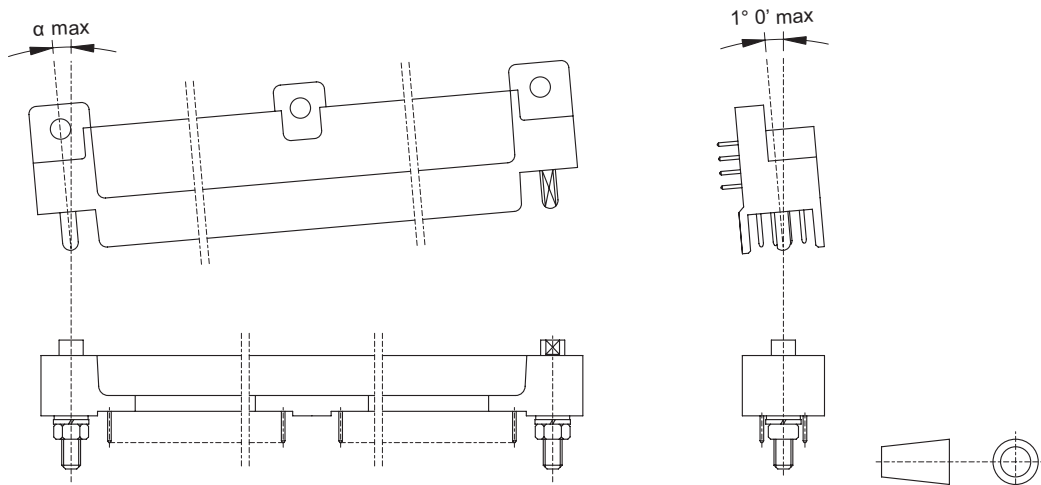


$\alpha = 0^{\circ} 11'$ for connectors equipped with 220 or 236 contact positions.
 $\alpha = 0^{\circ} 07'$ for connectors equipped with 316 contact positions.


Figure 37

The connector halves mating

Maximum permissible displacement in order to ensure the suitable fully insertion of the connector halves

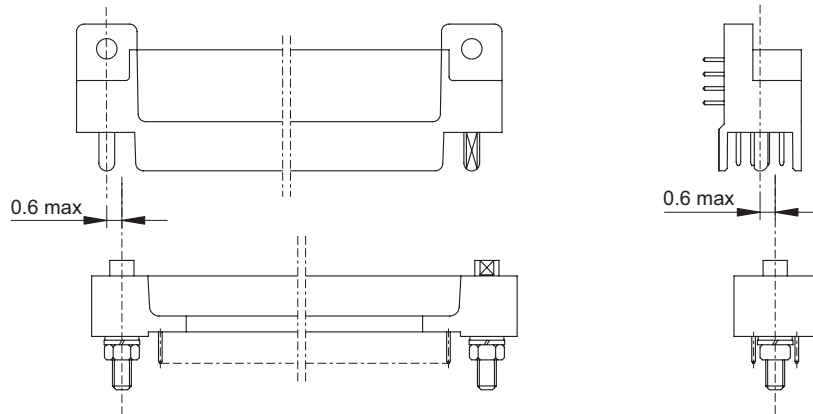

for connectors equipped with 42, 82, 110, 126, 158 or 174 contact positions.

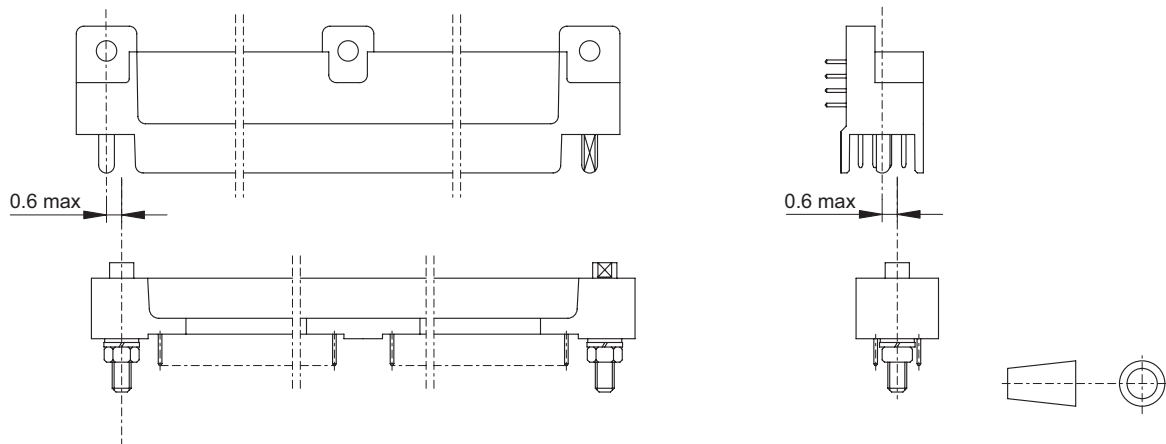


for connectors equipped with 220, 236 or 316 contact positions.


Figure 38

The connector halves mating

Maximum permissible distance of the connector halves, in order to ensure the acceptable electrical engagement made by all contacts

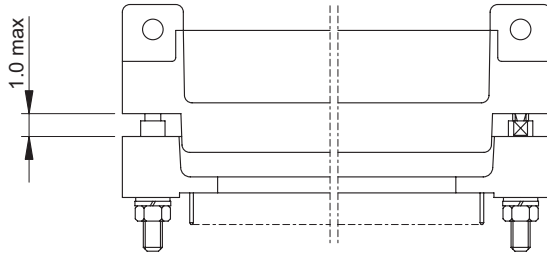

for connectors equipped with 42, 82, 110, 126, 158 or 174 contact positions.

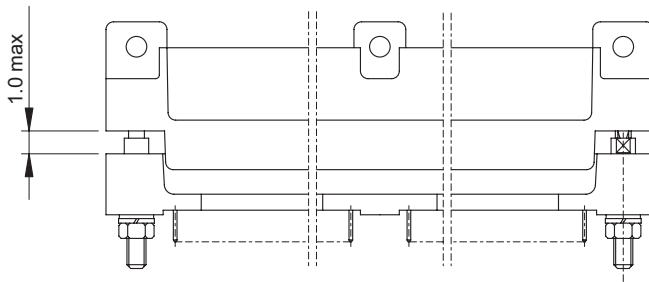

for connectors equipped with 220, 236 or 316 contact positions.




Figure 39

Connectors for measuring and test

Connectors for measuring and test

Devices for measuring and test equipments are:

1. extender board, (as rigid vehicle);
2. cable assembly, (as flexible vehicle).

Connector for measuring and test inspection is:

3. card edge test connector, (as added connector wired on the PCB).

Extender board connectors

Extender board device is a rigid printed-wiring board with plug connector wired on one side, and receptacle connector wired on the other side of the board. Extender board device is a rigid vehicle for measuring and test equipments. Connectors for extender board device are equipped with unpolarized male guide pins, installed on plug connector, and omnipolarized female guide sockets, installed on receptacle connector, in such a manner that every mating, with any of several connectors having different polarization positions, becomes possible.

Connectors for extender board devices are:

- a. connectors with dip solder as contacts terminal, (thru hole solder connections); right angle mounting style;
- b. Connectors with surface mount tail as contacts terminal, (surface mount solder connections); straddle mounting style.

Cable assembly connectors

Cable assembly device is a cable with plug connector wired on one end, and receptacle connector wired on the other end.

Cable assembly device is a flexible vehicle for measuring and test equipments. Connectors for cable assembly device are equipped with unpolarized male guide pins, installed on plug connector, and omnipolarized female guide sockets, installed on receptacle connector, in such a manner that every mating, with any of several connector having different polarization positions, becomes possible. Connectors for cable assembly device are connectors with hand solder, (solder cup), as contacts terminal. Maximum allowable wire size into solder cup terminal is AWG 26.

How To Order



a. connectors with dip solder as contacts terminal, (thru hole solder connections); right angle mounting style

CMD



P



H

1

2

3

4

5

6

7

1 Connector family										
2 Connector size	<table border="0"> <tr> <td>0 4 2 42 contact positions</td> <td>0 8 2 82 contact positions</td> <td>1 1 0 110 contact positions</td> </tr> <tr> <td>1 2 6 126 contact positions</td> <td>1 5 8 158 contact positions</td> <td>1 7 4 174 contact positions</td> </tr> <tr> <td>2 2 0 220 contact positions</td> <td>2 3 6 236 contact positions</td> <td>3 1 6 316 contact positions</td> </tr> </table>	0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions	1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions	2 2 0 220 contact positions	2 3 6 236 contact positions	3 1 6 316 contact positions
0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions								
1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions								
2 2 0 220 contact positions	2 3 6 236 contact positions	3 1 6 316 contact positions								
3 Connector and contacts style	<p>P M Plug connector pin contacts equipped</p> <p>E F Receptacle connector socket contacts equipped</p>									
4 Contact terminal style	<p><i>Dip solder, right angle, with:</i></p> <p>A .109 inch (2.76 mm) long dip* B .140 inch (3.55 mm) long dip</p> <p>C .172 inch (4.37 mm) long dip</p>									
5 Hardware code	<p>P Universal coupling guide pins on plug connector, or universal coupling guide sockets on receptacle connector</p>									
6 Hardware polarization	<p>3 7 When universal coupling guide pins are installed on plug connector, or universal coupling guide sockets are installed on receptacle connector</p> <p>3 8 when universal coupling guide pins, for plug connector, or universal coupling guide sockets, for receptacle connector, are shipped loose in a plastic bag.</p>									
7 Contact finishing	<p>H Contacts with plating and underplating conforming to MIL-DTL-55302</p>									

NOTE

See figures 2, 3, 15, 16, 17, 18, 30 and 31 of this catalogue

* This termination style is only applicable for PM connector style

How To Order



b. Connectors with surface mount tail as contacts terminal, (surface mount solder connections); straddle mounting style



1 Connector family	
2 Connector size	<p>Check firm 42 contact positions Check firm 82 contact positions 1 1 0 110 contact positions</p> <p>Check firm 126 contact positions 1 5 8 158 contact positions 1 7 4 174 contact positions</p> <p>Check firm 220 contact positions 2 3 6 236 contact positions 3 1 6 316 contact positions</p>
3 Connector and contacts style	<p>P M Plug connector pin contacts equipped</p> <p>E F Receptacle connector socket contacts equipped</p>
4 Contact terminal style	<p><i>Flex circuity straddle mount, with board package thickness:</i></p> <p>N from .039 to 0.79 inch (from 1.00 to 2.00 mm)</p> <p>R from .067 to .106 inch (from 1.70 to 2.70 mm)</p> <p>T from .106 to .146 inch (from 2.70 to 3.70 mm)</p> <p>V from .126 to .165 inch (from 3.20 to 4.20 mm)</p>
5 Hardware code	<p>P Universal coupling guide pins on plug connector, or universal coupling guide sockets on receptacle connector</p>
6 Hardware polarization	<p>3 7 When universal coupling guide pins are installed on plug connector, or universal coupling guide sockets are installed on receptacle connector</p> <p>3 8 when universal coupling guide pins, for plug connector, or universal coupling guide sockets, for receptacle connector, are shipped loose in a plastic bag.</p>
7 Contact finishing	<p>H Contacts with plating and underplating conforming to MIL-DTL-55302</p>

NOTE
See figures 6, 7, 8, 12, 13, 14, 21, 22, 23, 27, 28 and 29 of this catalogue

Connectors for measuring and test

Plug connector: 42, 82, 110, 126, 158 and 174 pin contact positions, .075 inch spacing, (1.905 mm), solder cup pin contact terminals, for cable assembly applications

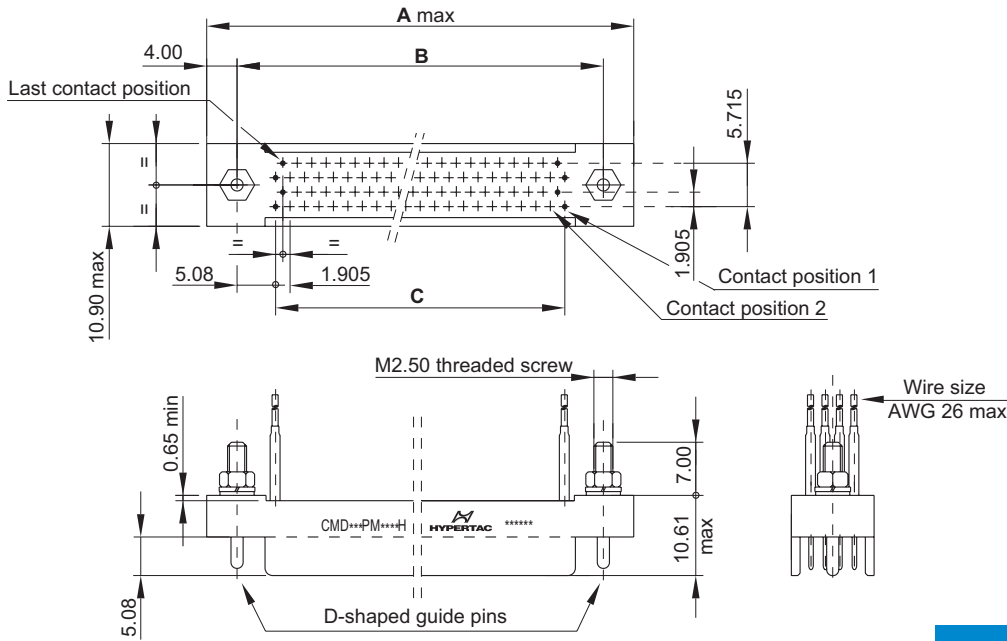


Figure 40

NOTES:

- 1. see dimensions in width in the table on this page.
- 2. lead length = 2ft

Receptacle connector: 42, 82, 110, 126, 158 and 174 socket contact positions, .075 inch spacing (1.905 mm), solder cup socket contact terminals, for cable assembly applications

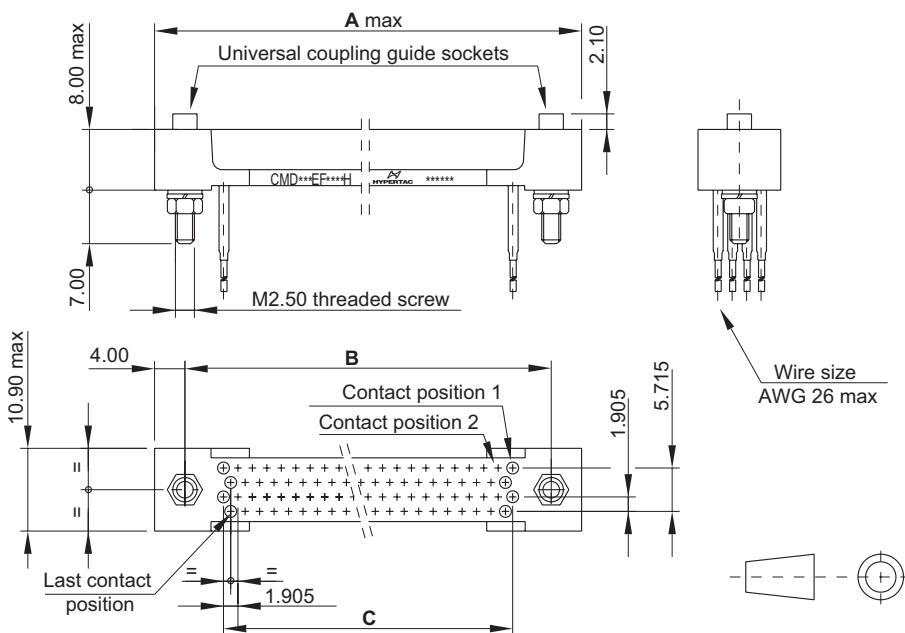


Figure 41


Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
42	37.210	29.210	19.050
82	56.260	48.260	38.100
110	69.595	61.595	51.435
126	77.215	69.215	59.055
158	92.455	84.455	74.295
174	100.075	92.075	81.915

NOTES:

- 1. see dimensions in width in the table on this page.
- 2. lead length = 2ft.

Connectors for measuring and test


Plug connector: 220, 236 and 316 pin contact positions, .075 inch spacing, (1.905 mm), solder cup pin contact terminals, for cable assembly applications

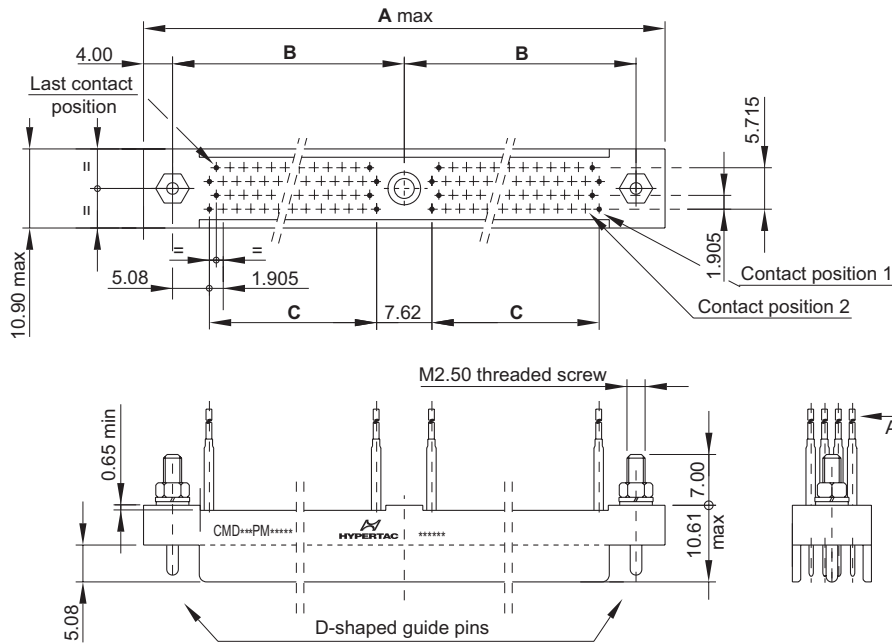

NOTES:
1. see dimensions in width in the table on this page.
2. lead length = ft.

Figure 42

Receptacle connector: 220, 236 and 316 socket contact positions, .075 inch spacing (1.905 mm), solder cup socket contact terminals, for cable assembly applications

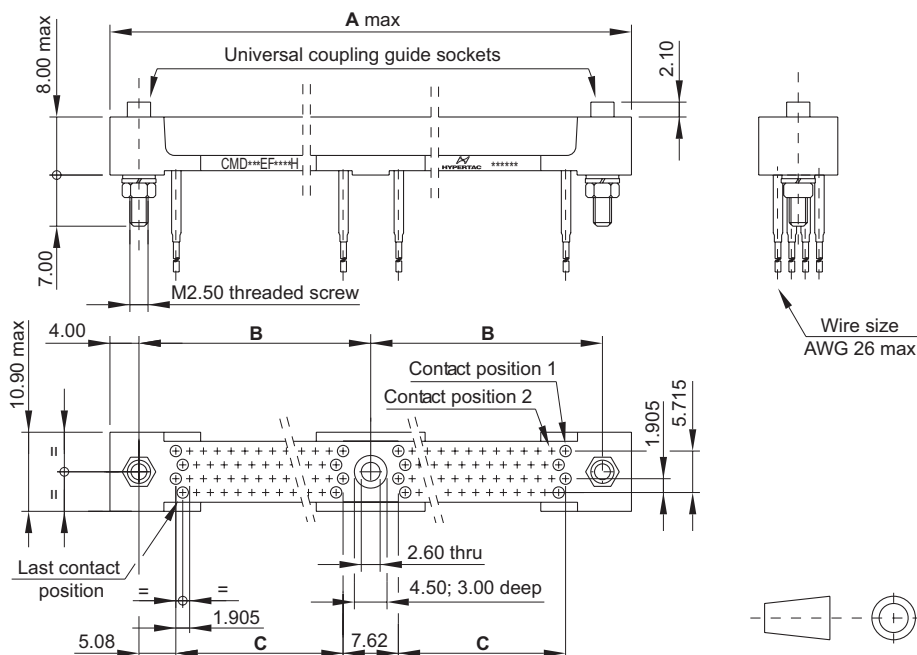

Dimensions in width			
Contact positions	A (mm)	B (mm)	C (mm)
220	128.650	60.325	51.435
236	136.270	64.135	55.245
316	174.370	83.185	74.295

Figure 43

NOTES:
1. see dimensions in width in the table on this page.
2. lead length = 2ft.

How To Order



CMD



W

P



H

1

2

3

4

5

6

7

1 Connector family										
2 Connector size	<p>All sizes are available for receptacle connectors, for plug connectors check firm</p> <table border="0"> <tr> <td>0 4 2 42 contact positions</td> <td>0 8 2 82 contact positions</td> <td>1 1 0 110 contact positions</td> </tr> <tr> <td>1 2 6 126 contact positions</td> <td>1 5 8 158 contact positions</td> <td>1 7 4 174 contact positions</td> </tr> <tr> <td>2 2 0 220 contact positions</td> <td>2 3 6 236 contact positions</td> <td>3 1 6 316 contact positions</td> </tr> </table>	0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions	1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions	2 2 0 220 contact positions	2 3 6 236 contact positions	3 1 6 316 contact positions
0 4 2 42 contact positions	0 8 2 82 contact positions	1 1 0 110 contact positions								
1 2 6 126 contact positions	1 5 8 158 contact positions	1 7 4 174 contact positions								
2 2 0 220 contact positions	2 3 6 236 contact positions	3 1 6 316 contact positions								
3 Connector and contacts style	<p>P M Plug connector pin contacts equipped</p> <p>E F Receptacle connector socket contacts equipped</p>									
4 Contact terminal style	<p>W Crimp terminal style, lead attached (<i>wire size AWG 26 max</i>)</p>									
5 Hardware code	<p>P Universal coupling guide pins on plug connector, or universal coupling guide sockets on receptacle connector</p>									
6 Hardware polarization	<p>3 7 When universal coupling guide pins are installed on plug connector, or universal coupling guide sockets are installed on receptacle connector</p> <p>3 8 When universal coupling guide pins, for plug connector, or universal coupling guide sockets, for receptacle connector, are shipped loose in a plastic bag.</p>									
7 Contact finishing	<p>H Contacts with plating and underplating conforming to MIL-DTL-55302</p>									

Card edge test connector

Card edge test connector is a special connector, added and wired on the PCB for test and measuring "in line" of microelectronic devices. Card edge test connector allows to have special points of access to an electrical circuit used for testing purposes.

Card edge test connector assembly consist of:

1. plug connector, socket contacts equipped, "free to move";
2. receptacle connector, pin contacts equipped, fixed and soldered to the PCB. Card edge test connector assembly features:
 - contact positions are 49 in all;
 - contact arrangement is offset grid pattern within dielectric connector body;
 - contact spacing in each row is .075 INCH (1.905 mm), center-to-center;
 - row-to-row spacing is 0.75 INCH (1.905 mm), center-to-center;
 - contact size 0.6 mm nominal pin DIA;
 - polarization feature is incorporated in each connector assembly to assure correct insertion;
 - turn locking hardware retains plug connector in the mating position;
 - every other requirement is specified on [pages 4 and 5](#) of this catalog.

Flex circuit soldering

Suggested temperature variation in hot bar soldering process

Graphical representation of hot bar suggested temperature variation, during flex circuit tails, and rigid printed wiring lands contacts, soldering

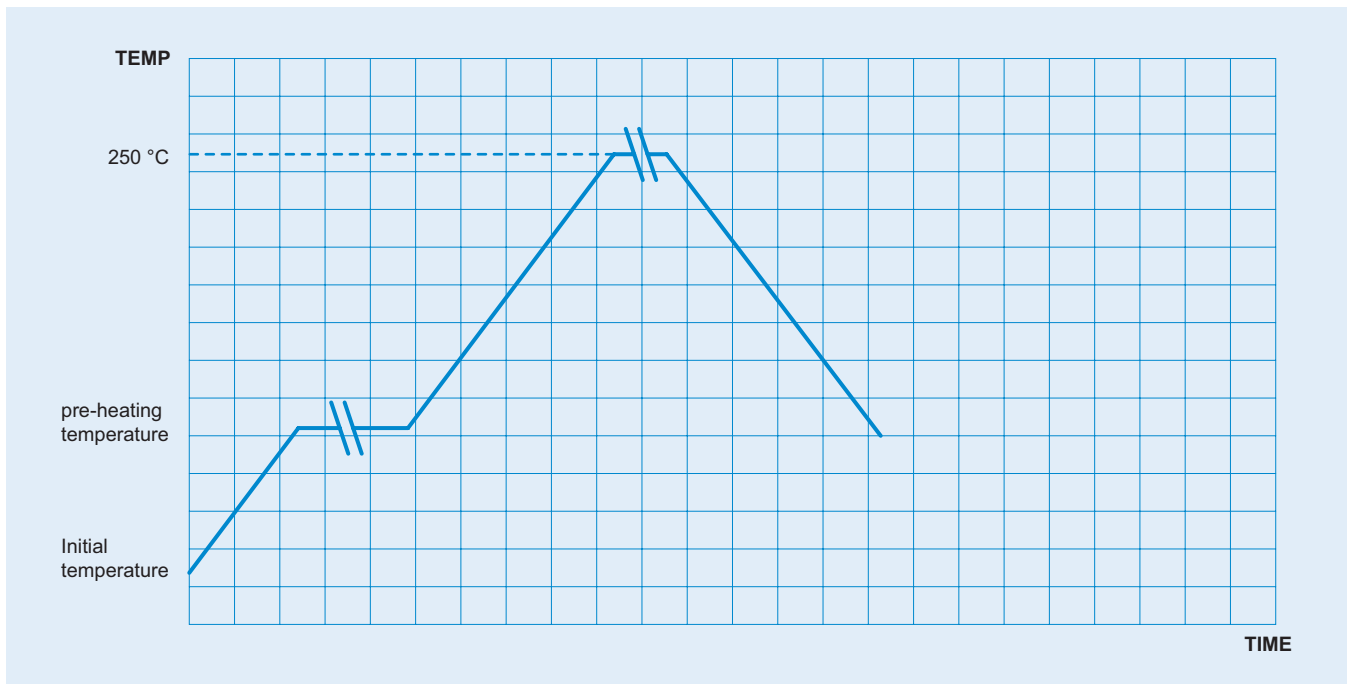


Figure 44

Soldering profile shall be defined and optimized in relation with the characteristics of the soldering equipment and of the daughterboard features (i.e. board package thickness, composite board type, heat sink thickness, microelectronic device density etc.).

Conformal coating after soldering

Surface mount flex circuit tails, and rigid printed wiring land contacts, must be conformally coated, after soldering and cleaning, of as suitable electrical insulating compound as specified in MIL-I-46058 document (latest issue).

Disclaimer 2018


All of the information included in this catalogue is believed to be accurate at the time of printing. It is recommended, however, that users should independently evaluate the suitability of each product for their intended application and be sure that each product is properly installed, used and maintained to achieve desired results.

Smiths Interconnect makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use.

Smiths Interconnect reserves the right to modify design and specifications, in order to improve quality, keep pace with technological development or meet specific production requirements.

No reproduction or use without express permission of editorial and pictorial content, in any manner.

Product Portfolio

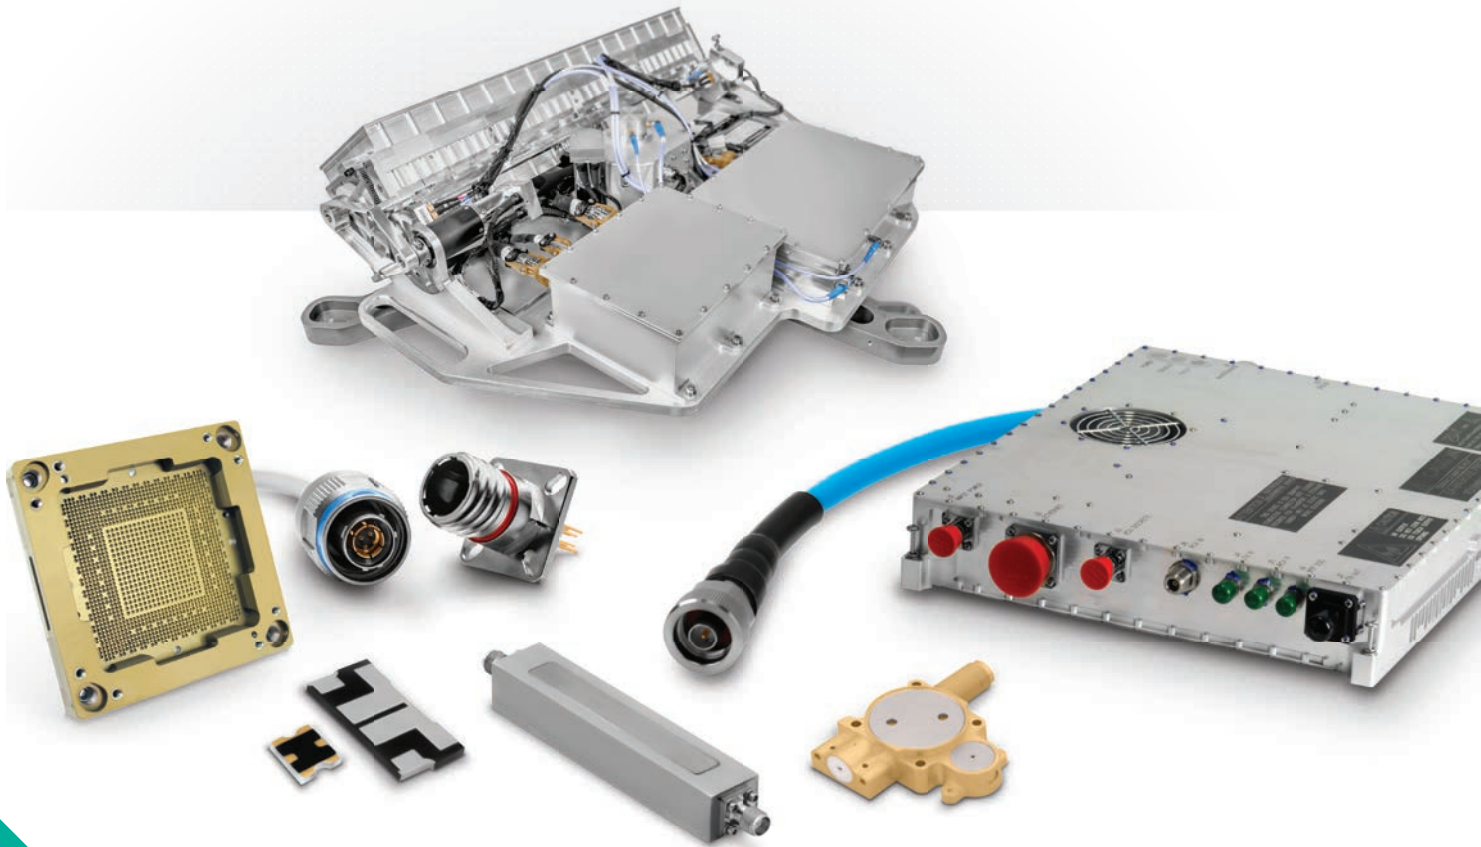

- Antenna Systems
- Cable Assemblies
- Connector Solutions
- Ferrite Components & Assemblies
- RF Filter Components & Assemblies
- Integrated Microwave Assemblies
- Millimeter-Wave Solutions
- RF Components
- Test Sockets and WLCSP Probe Heads
- Time & Frequency Systems

Global Support

UK Headquarters

- London, UK
+44 20 7004 1600
info.uk@smithsinterconnect.com

US Headquarters

- Stuart, FL
+1 772 286 9300
info.us@smithsinterconnect.com

Americas

- Costa Mesa, CA
+1 714 371 1100
info.us@smithsinterconnect.com
- Milpitas, CA
+1 408 957 9607 x 1125
info.us@smithsinterconnect.com
- Stuart, FL
+1 772 286 9300
info.us@smithsinterconnect.com
- Hudson, MA
+1 978 568 0451
info.us@smithsinterconnect.com
- Northampton, MA
+1 413 582 9620
info.northampton@smithsinterconnectinc.com
- Tampa, FL
+1 813 901 7200
info.tampa@smithsinterconnectinc.com
- Kansas City, KS
+1 913 342 5544
info.us@smithsinterconnect.com
- Salisbury, MD
+1 800 780 2169
info.us@smithsinterconnect.com
- Thousand Oaks, CA
+1 805 267 0100
info.thousandoaks@smithsinterconnectinc.com

Europe

- Deggendorf, Germany
+49 991 250 120
info.de@smithsinterconnect.com
- Genova, Italy
+39 0 10 60361
info.it@smithsinterconnect.com
- Dundee, UK
+44 1382 427 200
info.dundee@smithsinterconnect.com
- Rouen, France
+33 2 32 96 91 76
info.fr@smithsinterconnect.com
- Elstree, UK
+44 20 8236 2400
info.uk@smithsinterconnect.com

Asia

- Shanghai, China
+86 21 2283 8008
info.asia@smithsinterconnect.com
- Suzhou, China
+86 512 6273 1188
info.asia@smithsinterconnect.com
- Singapore
+65 6846 1655
info.asia@smithsinterconnect.com

more > [smithsinterconnect.com](https://www.smithsinterconnect.com) | [in](#) [twitter](#) [G+](#) [YouTube](#)