# RESISTOR FLANGE MOUNT 20 WATT



DATA SHEET PART SERIES: 31-7006-X-X

SHEET 1 OF 2 Dwg 31-7006 EN 13-3526 Revision-

#### **FEATURES**

#### **APPLICATIONS**

Tab Launch Broadcast

High Power Filters
Integrated Heat Sink
High Power Filters
High Power Amplifiers

Low Capacitance Isolators
Easy Installation Military

Wide Resistance Range Instrumentation

#### **GENERAL DESCRIPTION**

EMC Technology offers the widest selection of flange mount resistors worldwide. High power flange components offer excellent performance and the convenience of bolt on installation.



## ORDERING INFORMATION Part Identifier:

31-7006-X-X

Tolerance Value

#### **SPECIFICATIONS**

#### 1.0 ELECTRICAL

Resistance Range: 10 - 250 OHMS

Resistance Tolerance: ±5% standard 1% and 2% available Typical Capacitance: 0.60 pF 50 and 100 OHMS only

Input Power CW: 20 watts @ 100°C heat sink, derated linearly to zero power at 150°C

Peak Power: 200 watts (based on 10us pulse width and 1% duty cycle)

#### 2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +150°C

Non-operating Temperature: -65°C to +150°C

Temperature Coefficient: +/-200 PPM / °C max

3.0 MARKING

Unit Marking: Resistance Value; legibility and permanency per MIL-STD-130

#### 4.0 QUALITY ASSURANCE

Visual and Mechanical Inspection: Per 824W107

DC Resistance Check: 100% DC Resistance Check

Form 423F104 Rev-

Data Retention: Standard

5.0 PACKAGING

Standard Packaging: Tray

smiths microwave

Cage Codes: 24602 / 2Y194

www.emc-rflabs.com • +1 772-286-9300

Specifications are Subject to Change Without Notice

### RESISTOR FLANGE MOUNT 20 WATT



DATA SHEET PART SERIES: 31-7006-X-X

SHEET 2

Dwg 31

SHEET 2 OF 2 Dwg 31-7006 EN 13-3526 Revision-

#### **6.0 MECHANICAL**


Substrate Material: Aluminum Nitride


Resistive Film: Thin film Cover Material: Alumina

Tab Material: Beryllium Copper

Tab Finish: Tin/Lead
Flange Material: Copper
Flange Finish: Nickel

Metric Dimensions: Provided for reference only



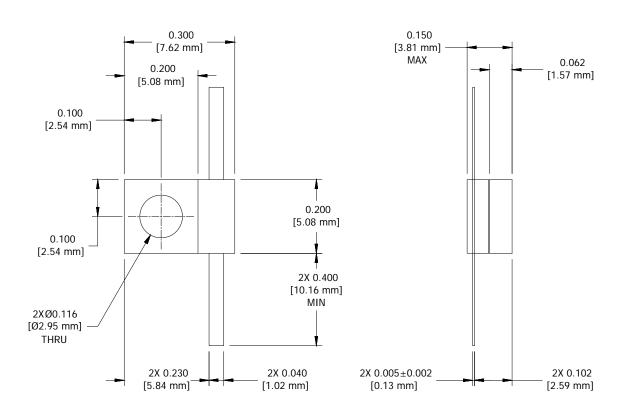

Unless Otherwise Specified: TOLERANCE:  $X.XX = \pm 0.02$   $X.XXX = \pm 0.010$