


DRAWING NO. 42-0054 REV. C

REQUIREMENTS	RATING	REQUIREMENTS	RATING
NOMINAL IMPEDANCE (Ohms)	50	VIBRATION	MIL-STD-202 METHOD 204 COND. D (20 G's)
FREQUENCY RANGE (GHz)	DC - 26.5	SHOCK	MIL-STD-202 METHOD 213 COND. I (100 G's)
TEMPERATURE COEFFICIENT	LESS THAN 200 PPM	THERMAL SHOCK	MIL-STD-202 METHOD 107 COND. B (-65 TO +125 ° C)
OPERATING TEMPERATURE (°C)	-55 TO +125	TERMINAL STRENGTH	2 LBS. MINIMUM PULL
VSWR (MAXIMUM)	DC-26.5: 1.20:1	MOISTURE RESISTANCE	MIL-STD-202 METHOD 106 LESS STEP 7B
AVERAGE POWER (WATTS)	1	SOLDERABILITY	MIL-STD-202 METHOD 208
DC RESISTANCE	50 OHMS ±5%	RESISTANCE TO SOLDER HEAT	MIL-STD-202 METHOD 210 COND. A
AVERAGE POWER DERATING			



TITLE TERMINATION, FLANGE
DC-26.5 GHz, 1 WATT

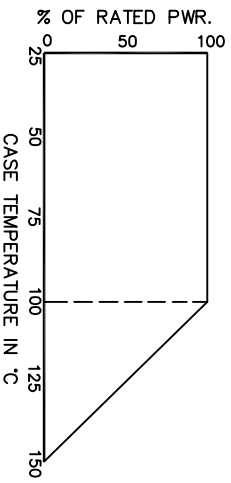

P.O. BOX 899
STUART, FL. 34995

DRAWN GEC 02/11/97
SHEET 2 OF 2

DRAWING NO. 42-0054

REV. C