

# RESISTOR

## TAB & COVER 40 WATT



DATA SHEET

PART SERIES: 81-3035TC-X-X

SHEET 1 OF 2  
Dwg 81-3035TC

EN 13-3531  
Revision-

### FEATURES


Wide Band Response  
High Power  
Low Capacitance  
Easy Installation  
Excellent Heat Transfer  
Wide Resistance Range

### APPLICATIONS

Broadcast  
High Power Filters  
High Power Amplifiers  
Isolators  
Military  
Instrumentation

### GENERAL DESCRIPTION

EMC Technology offers the widest selection of flangeless resistors worldwide. Tab and cover components offer the highest performance of any style of resistor component.

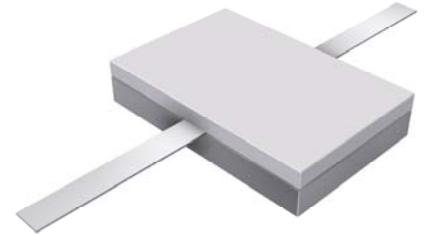

### ORDERING INFORMATION

#### Part Identifier:

81-3035TC-X-X

└─ Tolerance  
└─ Resistance Value

### SPECIFICATIONS

#### 1.0 ELECTRICAL

Resistance Range:	9 - 300 OHMS
Resistance Tolerance:	±5% standard 1% and 2% available
Typical Capacitance:	0.50 pF
Input Power CW:	40 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	400 watts (based on 10us pulse width and 1% duty cycle)

#### 2.0 ENVIRONMENTAL

Operating Temperature:	-55°C to +150°C
Non-operating Temperature:	-65°C to +150°C
Temperature Coefficient:	+/-200 PPM / °C max

#### 3.0 MARKING

Unit Marking:	Logo and Part Number
---------------	----------------------

#### 4.0 QUALITY ASSURANCE

Visual and Mechanical Inspection:	Per 824W107
DC Resistance Check:	100% DC Resistance Check
Data Retention:	Standard

#### 5.0 PACKAGING

Standard Packaging:	Tray
---------------------	------

# RESISTOR

## TAB & COVER 40 WATT



DATA SHEET



PART SERIES: 81-3035TC-X-X

SHEET 2 OF 2  
Dwg 81-3035TC

EN 13-3531  
Revision-

### 6.0 MECHANICAL

Substrate Material:	Beryllium Oxide
Resistive Film:	Thin Film
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Tin/Lead
Metric Dimensions:	Provided for reference only

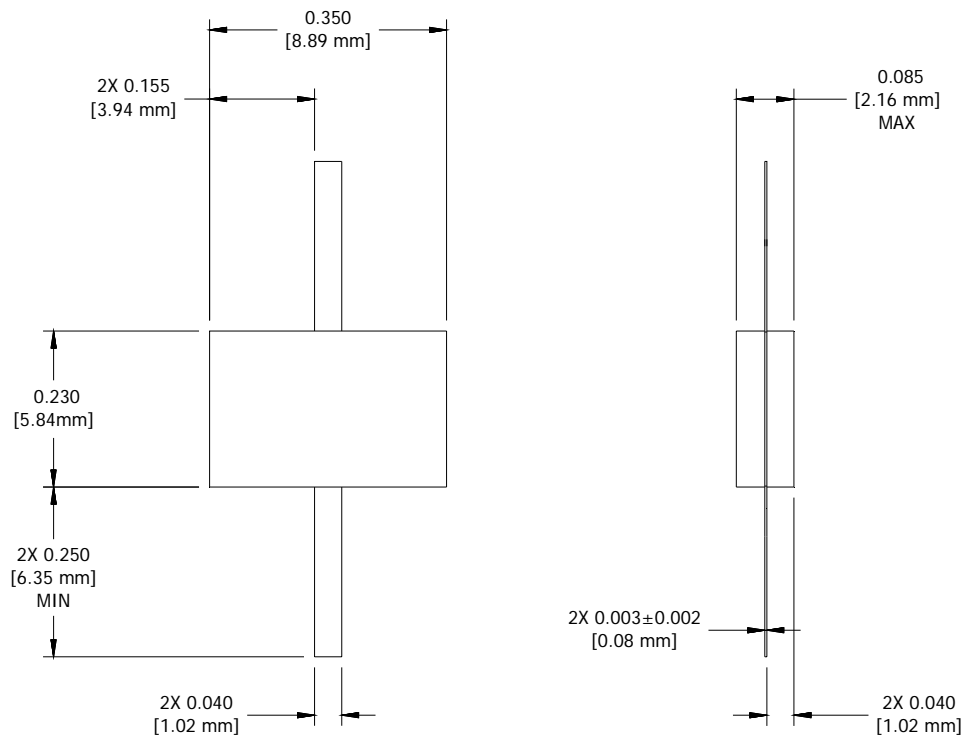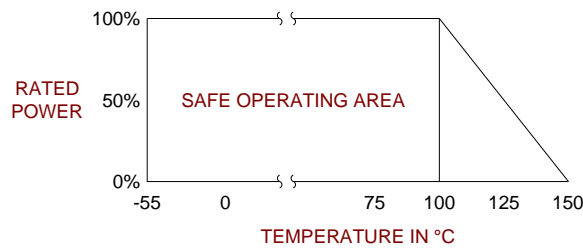

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.02 X.XXX = ± 0.010