RESISTOR CHIP 12 WATT



DATA SHEET PART SERIES: 81-3008B-X-X

SHEET 1 OF 2 Dwg 81-3008B EN 13-3509 Revision-

FEATURES APPLICATIONS

Wide Band Operation Broadcast

High Power Filters
Direct Attached High Power Amplifiers

Low Capacitance Isolators
Easy Installation Military

Wide Resistance Range Instrumentation



EMC Technology offers the widest selection of chip resistors worldwide. Chip components are offered in both thick and thin film resistive material and available in Alumina, Aluminium Nitride, Beryllium Oxide and CVD Diamond.



ORDERING INFORMATION
Part Identifier:

81-3008B-X-X

Tolerance
Resistance Value

SPECIFICATIONS

1.0 ELECTRICAL

Resistance Range: 5 - 250 OHMS

Resistance Tolerance: ±5% standard 1% and 2% available

Typical Capacitance: 1.65 pF

Input Power CW: 12 watts @ 100°C heat sink, derated linearly to zero power at 150°C

Peak Power: 120 watts (based on 10us pulse width and 1% duty cycle)

2.0 ENVIRONMENTAL

Operating Temperature: -55°C to +150°C

Non-operating Temperature: -65°C to +150°C

Temperature Coefficient: +/-200 PPM / °C max

Temperature Coemicient. +/-200 PPM / C max

3.0 MARKING

Unit Marking: No Marking

4.0 QUALITY ASSURANCE

Visual and Mechanical Inspection: Per 824W107

DC Resistance Check: 100% DC Resistance Check

Data Retention: Standard

5.0 PACKAGING

Standard Packaging: Tape and Reel

Smiths microwave Cage Codes: 24602 / 2Y194

www.emc-rflabs.com • +1 772-286-9300

Specifications are Subject to Change Without Notice

RESISTOR CHIP 12 WATT



DATA SHEET PART SERIES: 81-3008B-X-X


SHEET 2 OF 2 Dwg 81-3008B EN 13-3509 -Revision


6.0 MECHANICAL

Substrate Material: Beryllium Oxide
Resistive Film: Thin Film

Terminal Material: Thick film, Nickel barrier Tin/Lead plated

Metric Dimensions: Provided for reference only

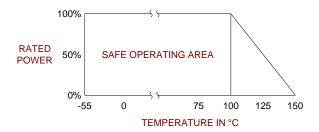

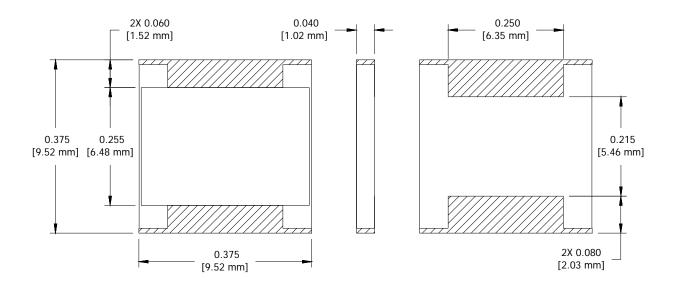

Unless Otherwise Specified: TOLERANCE: $X.XX = \pm 0.02$ $X.XXX = \pm 0.010$