


Time and Frequency Fault Sense Module for Model 9100 Model: 9104



Application - Defense (Military) ■ SatCom ■ Wireless

Description:

The Model 9104 FSU contains a CPU that collects faults within the Model 9100 system, furnishes the RS-232 I/O, Fault output, and the Network interface. The FSU may be removed from an operating systems without affecting reference outputs, only RS-232, Fault, and Network I/O's are lost while the module is removed. RS-422 I/O is available in place of RS-232.

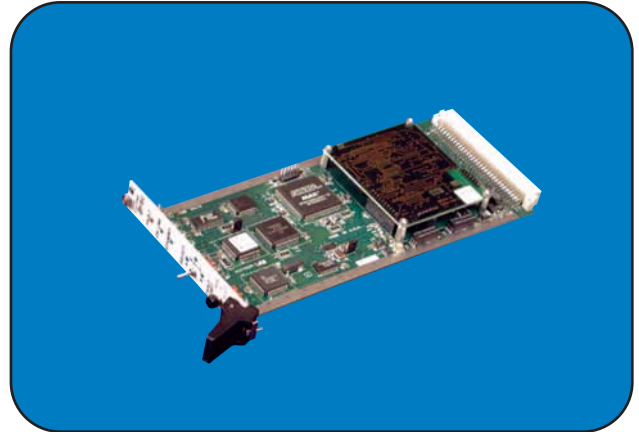

Specifications:

Alarms	Relay, form C contacts Major/Minor
RS-232 I/O	
Message Format:	Consult factory for details
Baud Rate:	9600, Fixed
Data Bits:	8
Parity:	None
Stop Bits:	1
Network	
Features:	10 Base-T Network Time Server and Telnet

Specifications subject to change without notice.