

TERMINATION CHIP 150 WATT



DATA SHEET

PART SERIES: 82A3031F

SHEET 1 OF 2
Dwg 82A3031F

EN 13-3450
Revision-

FEATURES


- Wide Band Operation
- High Power
- Direct Attached
- Low VSWR
- Easy Installation

APPLICATIONS

- Mobile Networks
- Broadcast
- High Power Amplifiers
- Isolators
- Military
- Instrumentation

GENERAL DESCRIPTION

EMC Technology offers the widest selection of chip terminations worldwide. Chip components are offered in both thick and thin film resistive material and available in Alumina, Aluminum Nitride, Beryllium Oxide and CVD Diamond.

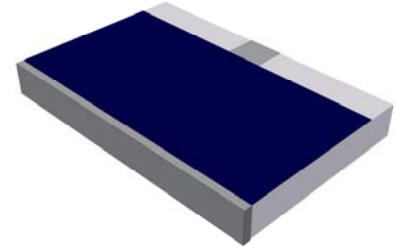

ORDERING INFORMATION

Part Identifier: 82A3031F

SPECIFICATIONS

1.0 ELECTRICAL

| | |
|--------------------|---|
| Nominal Impedance: | 50 ohms |
| Frequency Range: | DC - 2.0 GHz |
| VSWR: | 1.10:1 Max |
| Input Power CW: | 150 Watts @ 100°C heat sink, derated linearly to zero power and 150°C |
| Peak Power: | 1500 Watts (based on 10us pulse width and 1% duty cycle) |
| DC Resistance: | 50 Ω ±2% |

2.0 ENVIRONMENTAL

| | |
|----------------------------|---------------------|
| Operating Temperature: | -55°C to +150°C |
| Non-operating Temperature: | -65°C to +150°C |
| Temperature Coefficient: | +/-200 PPM / °C max |

3.0 MARKING

| | |
|---------------|------------|
| Unit Marking: | No Marking |
|---------------|------------|

4.0 QUALITY ASSURANCE

| | |
|-----------------------------------|--------------------------|
| Visual and Mechanical Inspection: | Per 824W107 |
| DC Resistance Check: | 100% DC Resistance Check |
| Data Retention: | Standard |

5.0 PACKAGING

| | |
|---------------------|---------------|
| Standard Packaging: | Tape and Reel |
|---------------------|---------------|

TERMINATION CHIP 150 WATT



DATA SHEET



PART SERIES: 82A3031F

SHEET 2 OF 2
Dwg 82A3031F

EN 13-3450
Revision-

6.0 MECHANICAL

| | |
|---------------------|-----------------------------|
| Substrate Material: | Beryllium Oxide |
| Resistive Film: | Thin Film |
| Terminal Material: | Silver |
| Metric Dimensions: | Provided for reference only |

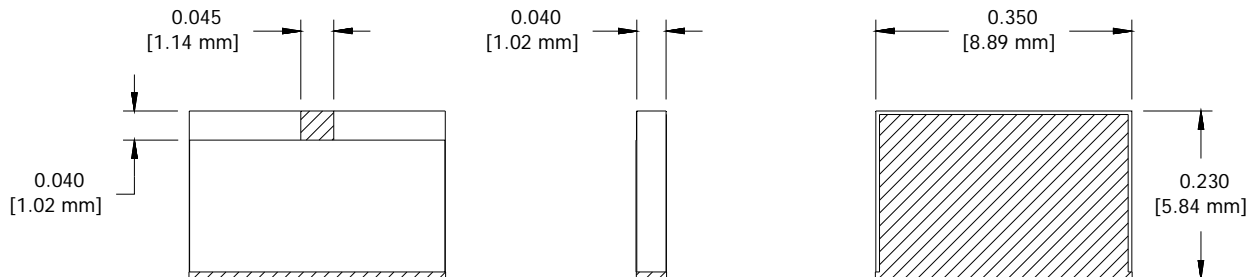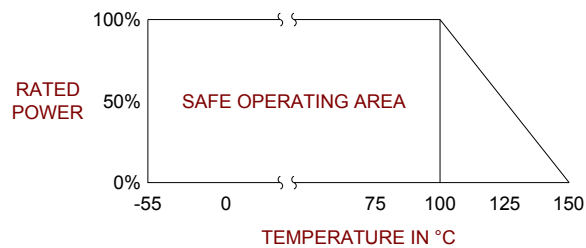

Unless Otherwise Specified: TOLERANCE: X.XX = ± 0.02 X.XXX = ± 0.010