
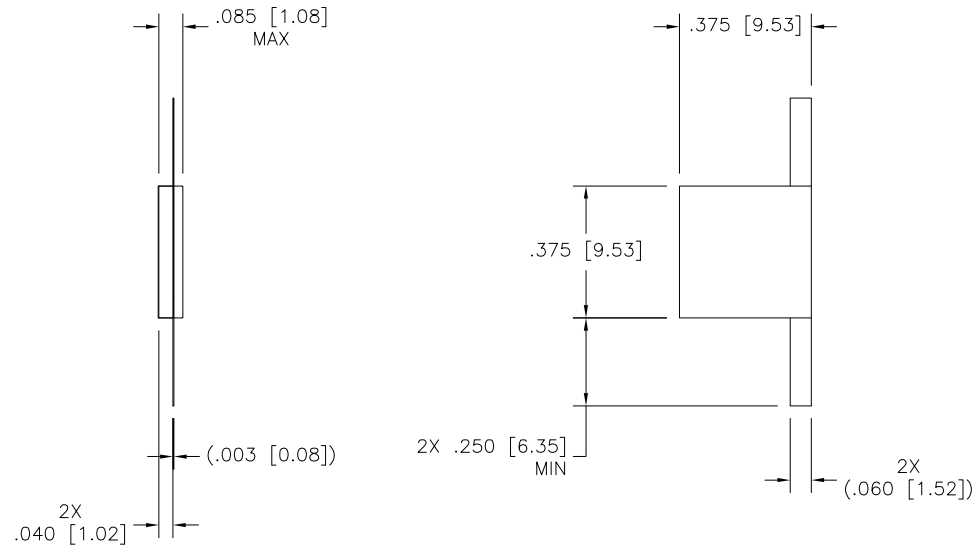


EDD



MATERIALS:
 SUBSTRATE: BERYLLIUM OXIDE
 COVER: ALUMINA
 TAB: BERYLLIUM COPPER PER ASTM B194
 RESISTIVE FILM: NICHROME

FINISH:
 TAB: SILVER PER ASTM-B-700

TECHNICAL:
 NOMINAL IMPEDANCE (OHMS): 50
 FREQUENCY RANGE (GHz): DC-1.0
 TEMPERATURE COEFFICIENT: ± 200 PPM/°C MAX
 OPERATING TEMP. (°C): -55° TO +150°
 VSWR (MAX): 1.50:1
 INPUT POWER (WATTS): 150
 ATTENUATION STABILITY: .0001 dB/dB/°C
 ATTENUATION ACCURACY: ± 1.0 dB

 8851 SW OLD KANSAS AVE STUART, FL 34997 PHONE NO. (772) 286-9300 FAX NO. (772) 283-5286	UNLESS OTHERWISE SPECIFIED 1. DO NOT SCALE DRAWING 2. DIMENSIONS ARE IN INCHES 3. DIMENSIONS ARE AFTER PLATING 4. CORNERS, EDGES AND FILLETS: R 0.005 MAX 5. SURFACE ROUGHNESS: N/A 6. REMOVE ALL BURRS	TITLE CHIP, ATTENUATOR, 150 WATT, 08.00 dB																					
	TOLERANCES .XXX ± 0.01 X.XXX ± 0.010 FRACTIONS ± 1/16 X.XXXX ± 0.0005 ANGLES ± 5°	DRAWING NUMBER 83A1006TC08.00F																					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTIES OF EMC TECHNOLOGY AND FLORIDA RF LABS AND SHALL NOT BE DUPLICATED OR USED AS BASIS FOR THE MANUFACTURE OR SALES OF PARTS OR DEVICES WITHOUT PERMISSION.		REFERENCE / MACOLA NO. 83A1006TC08.00F																					
<table border="1"> <tr> <th>REV</th> <th>DATE</th> <th>BY</th> <th>EN NUMBER</th> </tr> <tr> <td>1</td> <td>05/02/13</td> <td>SP</td> <td>13-1435</td> </tr> <tr> <td colspan="4" style="text-align: center;">REVISION</td> </tr> </table>	REV	DATE	BY	EN NUMBER	1	05/02/13	SP	13-1435	REVISION				MATERIAL -	FINISH -	<table border="1"> <tr> <th>EMC CAGE CODE</th> <th>RF CAGE CODE</th> <th>PLOT SCALE</th> <th>SHEET</th> </tr> <tr> <td>24602</td> <td>2Y194</td> <td>N/A</td> <td>1 OF 1</td> </tr> </table>	EMC CAGE CODE	RF CAGE CODE	PLOT SCALE	SHEET	24602	2Y194	N/A	1 OF 1
REV	DATE	BY	EN NUMBER																				
1	05/02/13	SP	13-1435																				
REVISION																							
EMC CAGE CODE	RF CAGE CODE	PLOT SCALE	SHEET																				
24602	2Y194	N/A	1 OF 1																				