


TS03 Series

ATTENUATOR CHIP 2 WATTS

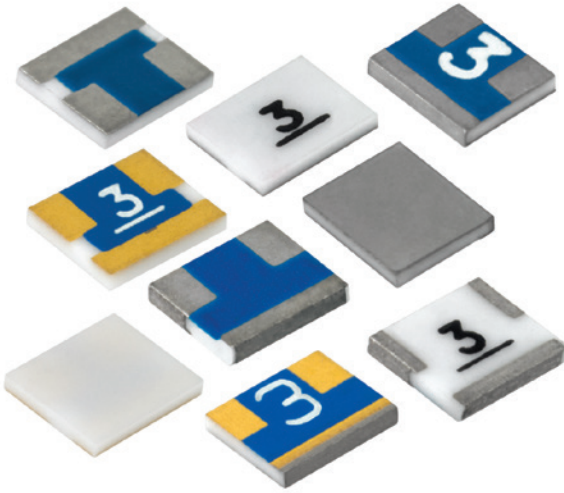

TS03 Series Chip Attenuators offer proven performance and significant high reliability heritage in a commercial grade product.

Smiths Interconnect is the world leader in chip attenuators offering the widest selection of products from DC through Q band. Chip components are offered on Alumina, Aluminum Nitride, Beryllium Oxide, and CVD Diamond for a wide range of applications. Backed by proven performance and significant heritage, Smiths Interconnect is the leader in high reliability components.

The TS03 platform offers significant heritage and proven performance in a cost effective commercial grade product. High reliability tested options are also available to ensure mission success in demanding high reliability applications. Rated for DC-12.4 GHz with excellent broadband response, the TS03 series of products has a wide range of applications. It is constructed on an Alumina substrate with rugged thick film terminations and passivated Tantalum Nitride resistive elements. The product also includes a protective coating for added protection from various environmental conditions. Multiple attenuation values and mounting configuration are available to support both surface mount and wire bond applications. Various finish options are also available including RoHS compliance.

Features and Benefits

- Small Footprint
- Multiple Mounting Configurations
- Broad Frequency Range
- Low VSWR
- Wide Range of Attenuation Values
- Tight Attenuation Tolerance
- High Reliability Options Available

Applications

- Amplifier Circuits
- Transmit/Receive Modules
- Up/Down Converters
- Instrumentation
- Satellite Communications
- Radar
- Broadcast

Technical Characteristics

Mounting Configuration Options	Planar	Single Wrap (W1)	Triple Wrap (W3)	Wire Bondable Gold (WB1)
--------------------------------	--------	------------------	------------------	--------------------------

Electrical

Nominal Impedance	50 ohms			
Frequency Range	DC -8 GHz (*12.4 GHz for planar option)			
Attenuation Values Available	0-20 in 1 dB Increments			
Attenuation Accuracy	ATTENUATION ACCURACY			
	Attenuation Value (dB)	DC-4 GHz	4-8 GHz	8-12.4 GHz*
	0	-0, +0.3	-0, +0.5	-0, +0.5
	1-3	± 0.3	± 0.5	± 0.5
	4-6	± 0.4	± 0.5	± 0.5
	7-10	± 0.5	± 0.5	± 0.75
	11-15	± 0.75	-3.0, +0.5	-3.5, +0.5
	16-20	± 1.0	-4.0, +0.5	-6.0, +1.0
Input Power CW	2 Watts Max up to 125°C (See derating curve)			
Peak Power	50 Watts based on 10 μS pulse width @ 1% Duty Cycle			
VSWR	VSWR - applies to Planar, Single Wrap, Triple Wrap			Wire Bondable Gold
	DC-4 GHz	4-8 GHz	8-12.4 GHz*	
	1.25:1 Max	1.35:1 Max	1.50:1 Max	1.30:1 Max

Environmental

Operating Temperature	-55°C to +150°C
Storage Temperature	-65°C to +150°C
Moisture Sensitivity Level	MSL 1 - Unlimited

Mechanical

Substrate Material	Alumina (Al ₂ O ₃) 96%			
Resistive Film	Thin Film, Tantalum Nitride			
Terminal Material	Thick Film			Thick Film Bondable Gold Input/Output Pads, Solderable Platinum Gold Ground
Protective Coating	Polymer			
Finish Options	Blank	Solder Plated (Sn60/Pb40)	Solder Plated (Sn60/Pb40)	Solder Plated (Sn60/Pb40)
	-F	Silver Plated (RoHS Compliant)	Silver Plated (RoHS Compliant)	Silver Plated (RoHS Compliant)
	-S	Pretinned (Sn60/Pb40)	Pretinned (Sn60/Pb40)	Pretinned (Sn60/Pb40)
	-G	Gold (Thick Film)		

Marking

Unit Marking	dB Value
--------------	----------


Quality Assurance

	Sample visual and mechanical inspection - 1.0 AQL per mechanical drawing requirements. Periodic electrical inspection performed for commercial grade products. High reliability tested products are available per MIL-PRF-55342.
--	--

Packaging


Standard Packaging	Tape and Reel or Waffle Pack
--------------------	------------------------------

Power Derating Curve

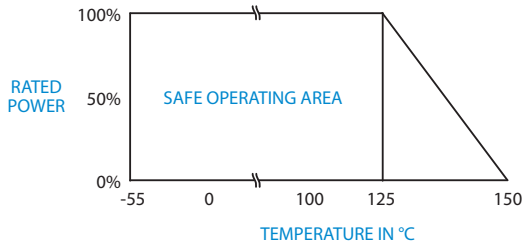


Typical Data

TS03XX Series Attenuation

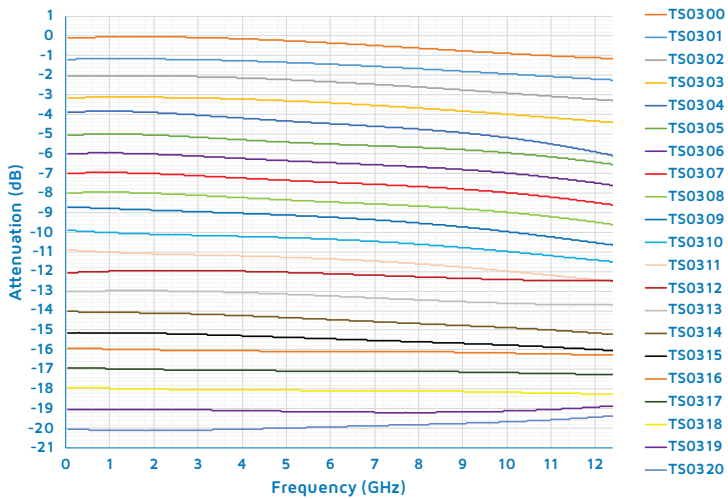


TS03XX Series VSWR

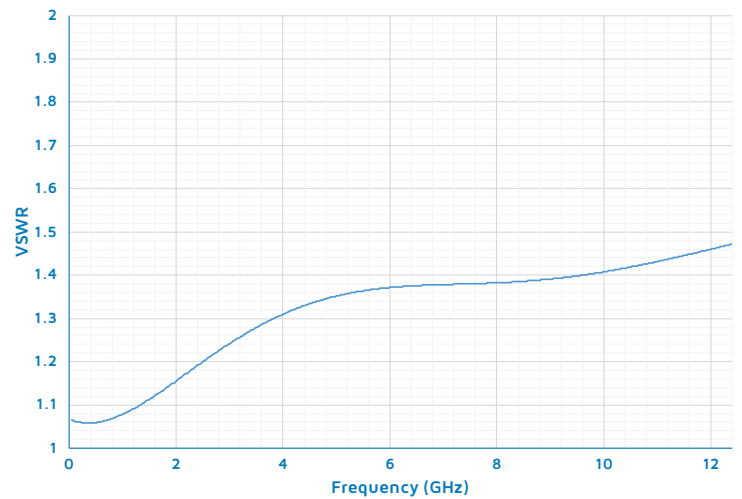


Mechanical


TS03XX - Planar Option

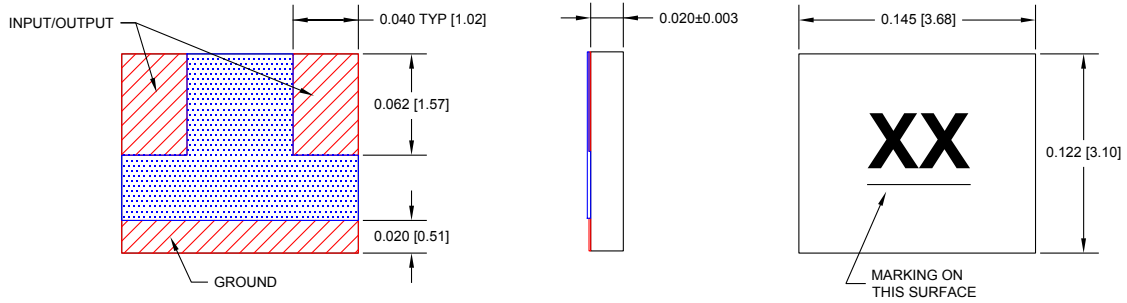


TS03XXW1 - Single Wrap Option

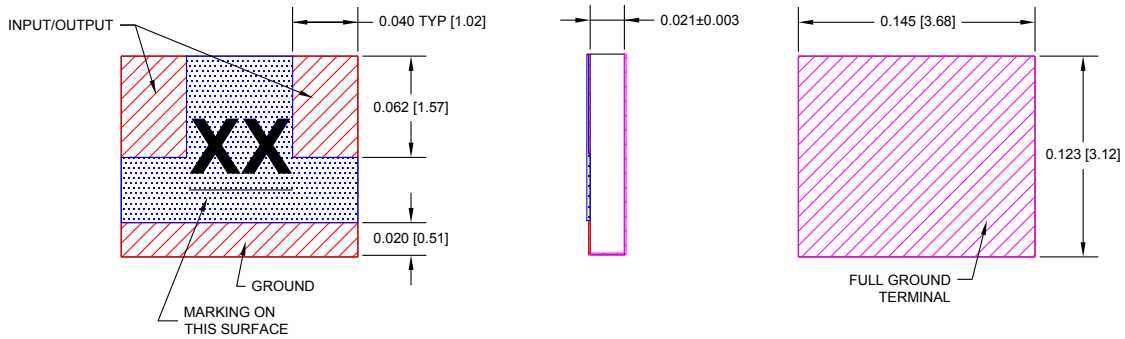

TS03XXW3 - Triple Wrap Option

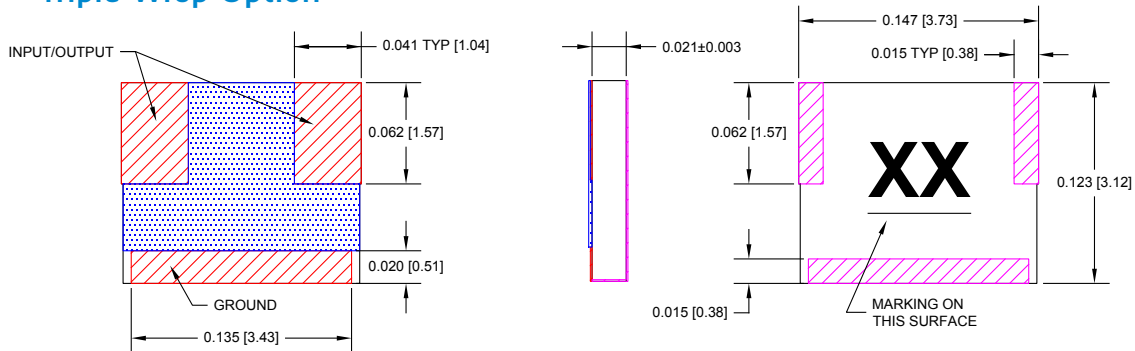


TS03XXWB1 - Wire Bondable Gold Option

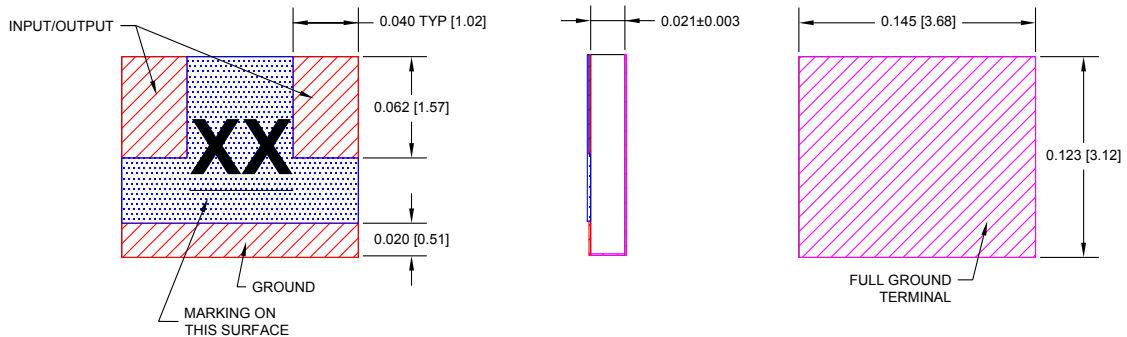

*Dimensions apply before solder, allow 0.015" max for all pretinned surfaces
Unless otherwise specified, tolerance: X.XXX = ±0.005"

Suggested Mounting Footprint

Part Number	Inches						MM					
	A	B	C	D	S	W	A	B	C	D	S	W
TS03XX (Planar)	0.043	0.065	0.065	0.025	0.040	0.150	1.09	1.65	1.65	0.64	1.02	3.81
TS03XXW3 (Triple Wrap)	0.043	0.064	0.067	0.023	0.041	0.150	1.09	1.63	1.70	0.58	1.04	3.81

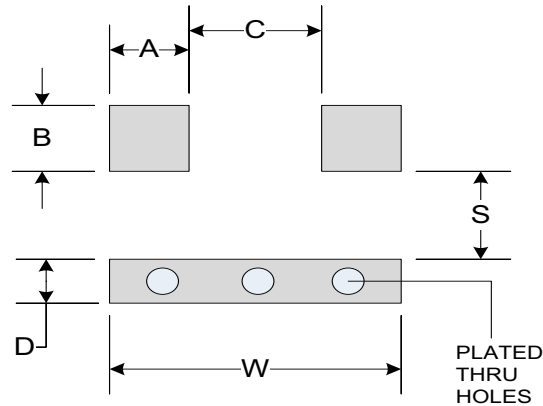

How To Order

Specify Model Number: **TS03XXXXXX**

<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <div style="border: 1px solid gray; padding: 2px; margin: 2px;">T</div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;">S</div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;">0</div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;">3</div> </div> <div style="text-align: center;"> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> </div> <div style="text-align: center;"> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> </div> <div style="text-align: center;"> <div style="border: 1px solid gray; padding: 2px; margin: 2px;"> </div> </div> </div> <p style="text-align: center; font-weight: bold; font-size: 1.2em;">1 2 3 4</p>	<p>1 Series Name TS03 Series</p> <hr/> <p>2 Attenuation Value 00 00 dB through 20 20 dB</p> <hr/> <p>3 Options</p> <p><input type="checkbox"/> Planar W1 Single Wrap Ground</p> <p>W3 Triple Wrap - All Ports WB1 Wire Bondable</p> <hr/> <p>4 Terminal Finish</p> <p><input type="checkbox"/> Standard S Pretinning F RoHS G Gold</p>
--	--

Global Support

UK Headquarters

- London, UK
+44 20 7004 1600
info.uk@smithsinterconnect.com

US Headquarters

- Stuart, FL
+1 772 286 9300
info.us@smithsinterconnect.com

Americas

- Costa Mesa, CA
+1 714 371 1100
info.us@smithsinterconnect.com
- Milpitas, CA
+1 408 957 9607 x-1125
info.us@smithsinterconnect.com
- Stuart, FL
+1 772 286 9300
info.us@smithsinterconnect.com
- Hudson, MA
+1 978 568 0451
info.us@smithsinterconnect.com
- Northampton, MA
+1 413 582 9620
info.northampton@smithsinterconnectinc.com
- Tampa, FL
+ 1 813 901 7200
info.tampa@smithsinterconnectinc.com
- Kansas City, KS
+1 913 342 5544
info.us@smithsinterconnect.com
- Salisbury, MD
+1 800 780 2169
info.us@smithsinterconnect.com
- Thousand Oaks, CA
+1 805 267 0100
info.thousandoaks@smithsinterconnectinc.com

Europe

- Deggendorf, Germany
+49 991 250 120
info.de@smithsinterconnect.com
- Genova, Italy
+39 0 10 60361
info.it@smithsinterconnect.com
- Dundee, UK
+44 1382 427 200
info.dundee@smithsinterconnect.com
- Rouen, France
+33 2 32 96 91 76
info.fr@smithsinterconnect.com
- Elstree, UK
+44 20 8236 2400
info.uk@smithsinterconnect.com

Asia

- Shanghai, China
+86 21 3318 4650
info.asia@smithsinterconnect.com
- Suzhou, China
+86 512 6273 1188
info.asia@smithsinterconnect.com
- Singapore
+65 6846 1655
info.asia@smithsinterconnect.com

more > smithsinterconnect.com | [in](#) [twitter](#) [G+](#) [YouTube](#)