# **RESISTOR FLANGE MOUNT 150 WATT**





#### DATA SHEET

#### PART SERIES: 31A1021XXF

#### **FEATURES**

Tab Launch High Power Integrated Heat Sink Low Capacitance Easy Installation Wide Resistance Range

#### **GENERAL DESCRIPTION**

EMC Technology offers the widest selection of flange mount resistors worldwide. High power flange components offer excellent performance and the convenience of bolt on installation.

## **ORDERING INFORMATION**

**Part Identifier:** 

## 31A1021XXF

-55°C to +150°C

-65°C to +150°C

+/-200 PPM / °C max

**APPLICATIONS** 

High Power Filters High Power Amplifiers

Instrumentation

Broadcast

Isolators

Military

└ Tolerance — Resistance Value

# SPECIFICATIONS

#### **1.0 ELECTRICAL**

Resistance Range:	7 - 1000 OHMS
Resistance Tolerance:	±5% standard 1% and 2% available
Typical Capacitance:	0.8 pF
Input Power CW:	150 watts @ 100°C heat sink, derated linearly to zero power at 150°C
Peak Power:	1500 watts (based on 10us pulse width and 1% duty cycle)

#### **2.0 ENVIRONMENTAL**

Operating Temperature: Non-operating Temperature: Temperature Coefficient:

3.0 MARKING

Unit Marking:

Logo and Part Number, legibility and permanency per MIL-STD-130


### **4.0 QUALITY ASSURANCE**

Visual and Mechanical Inspection: DC Resistance Check: Data Retention: Per 824W107 100% DC Resistance Check Standard

#### **5.0 PACKAGING**


Standard Packaging:

Tray



Dwg 31A1021F

EN 14-0555 Rev<u>ision A</u>



# RESISTOR **FLANGE MOUNT 150 WATT**





**DATA SHEET** 


#### PART SERIES: 31A1021XXF


Dwg 31A1021F

EN 14-0555

#### **6.0 MECHANICAL**

Substrate Material:	Beryllium Oxide
Resistive Film:	Thin Film
Cover Material:	Alumina
Tab Material:	Beryllium Copper
Tab Finish:	Silver plated
Flange Material:	Copper
Flange Finish:	Nickel
Metric Dimensions:	Provided for reference only

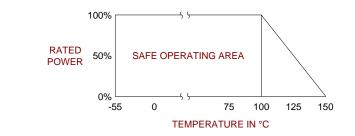

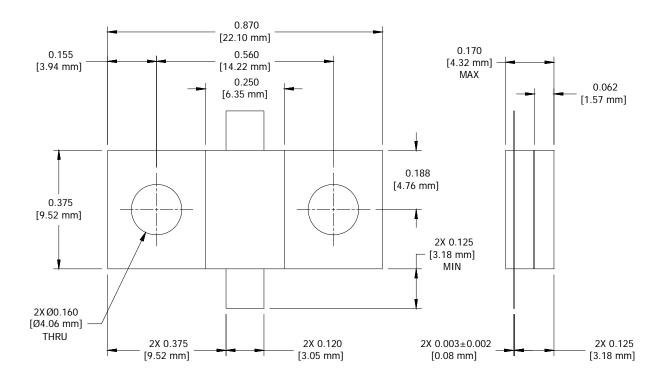

Unless Otherwise Specified: TOLERANCE:  $X.XX = \pm 0.02$   $X.XXX = \pm 0.010$ 

Form 423F104 Rev-

Cage Codes: 24602 / 2Y194 Specifications are Subject to Change Without Notice