


Micro-D Twinax

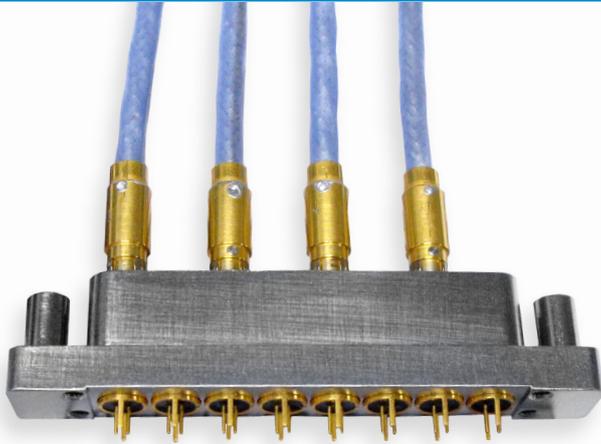

Smiths Interconnect offers a complete line of differential Twinax and Quadrx connectors, contacts and cable assemblies for high speed Ethernet, Firewire, and Fibre Channel applications. Differential pair quadrx and twinax connectors and cable assemblies offer superior performance in high speed matched impedance data-on-demand applications. The signal to signal and signal to shield characteristic impedance is maintained throughout the connector pair. A true twinaxial connector interface ensures signal integrity while minimizing jitter and data rate errors.

Testing Capabilities

Smiths Interconnect Quadrx and Twinax interconnects are characterized for testing eye pattern, jitter, skew, and insertion loss on differential pair 100 Ohm high speed gigabit ethernet applications with a wide variety of testing protocols. We utilize the Agilent E5071C 4 port network analyzer to measure the differential pair TDR impedance between Twinax connectors, cable assemblies, and quad cable Ethernet and Fibre Channel interconnect systems ensuring the most accurate acquired signal for high speed communications testing. The E5071C 4 port network analyzer is capable of highly accurate 100 Ohm differential measurements up to 20 GHz and can measure eye diagrams up to 16 Gbps.

Features

Fibre Channel

Ethernet: 10 Base-T, 100 Base-T, 1000 Base-T

Firewire: IEEE 1394a and 1394b

USB, DVII, HDMI and Infiniband

Specifications

Temperature Rating	-55°C to + 125°C
Corrosion	MIL-STD-202 Method 101, Test Condition B
Shock	MIL-STD-202 Method 213, Test Condition B
Vibration	MIL-STD-202 Method 204, Test Condition B
Thermal Shock	MIL-STD-202 Method 107, Test Condition B
Durability	500 mate/unmate cycles minimum
Dielectric Withstand Voltage	250 VDC
Insulation Resistance	5.000 MegaOhms min
Contact Current Rating	3.0 Amps D.C. max
Bandwidth	Up to 3 GHz
Data Rates	Contacts designed to exceed 6 Gbps assembly dependent upon type and length of cable used
Differential Pair Cable Impedance	100 Ohm ± 10 Ohm
Signal to Shield Cable Impedance	5 Ohm + 7 Ohm

Materials and Finishes

Shells & Inner Contacts	Brass per ASTM-B16, alloy UNS C3600 or BeCu per ASTM-B196, alloy UNS C17200, C17300 or leaded nickel copper, alloy UNS C19500, C19600 Gold plate per MIL-DTL-45204 Type II, Class 1
Insulators	PTFE per ASTM-D1710 Ultem per ASTM-D5205
Connector Plug/ Receptacle Shells	Aluminum per ASTM-B211/221, 6061-T6 Electroless nickel plate per SAE AMS-C-26074 or Cadmium plate per SAE AMS QQ-P-416